Top View



Front View

Detail: • แสดงผลด้วยตัวเลข 7 SEGMENT สีแดง

รับอินพุต RS485 Modbus RTU

RS485 : ตั้งค่า Address ได้ 1 - 255


RS485 : ตั้งค่า Baud Rate ได้ 4800 9600 19200 38400 57600


RS485 : ตั้งค่า Parity ได้ None Odd Even

RTU : รองรับ Function Read Register 03h 04h RTU : รองรับ Function Write Register 10h

ตั้งค่าการทำงานด้วย Remote IF

Rear View

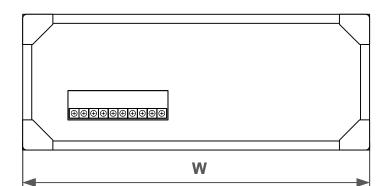



Right View

Address (Hex)	Name	Scale	RTU Function
00h – 01h	Series	-	03h 04h
02h – 03h	Value 1	0 - 999999	03h 04h 10h
04h – 05h	Value 2	0 - 999999	03h 04h 10h
06h – 07h	Value 3	0 - 999999	03h 04h 10h
08h – 09h	Value 4	0 - 999999	03h 04h 10h
0Ah – 0Bh	Enable Point	0 - 00.00.00 (0 - 1)	03h 04h 10h
0Ch – 0Dh	Select Value	1 - 4	03h 04h 10h
0Eh – 0Fh	Baud Rate	0 - 4	03h 04h 10h
10h – 11h	Parity	0 - 2	03h 04h 10h
12h – 13h	Slave Address	1 - 255	03h 04h 10h

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Display
Input	-
Output	-
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

		REMARK		
	Frame		luminum	
	Color		lack	
	Protection		230	
	Model		GM-62069	
	APPEND			
	Dimension	1.2"	S	
		2.3"	M	
		4"	600W x 200H x 100Dmm. L	
	Character	Arial (Font), White PVC Sticker		
	-			

DEMADE

PRIMUS CO., LTD.		
Draft by	Suphot	
Date	21.05.2019	
Revision	1	
Customer		

Approve	

ราคาตั้ง

7 Segment Big Display

TGM-62069rev1 [4"]: 13,600 บาท