

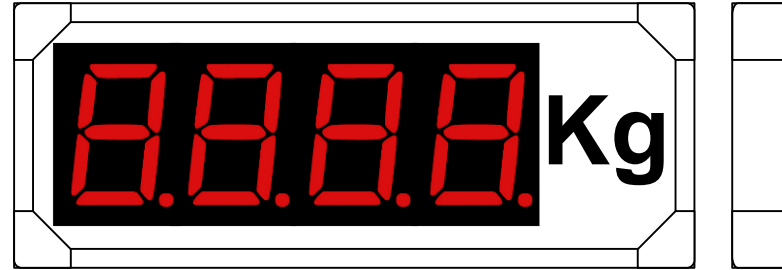


Left View



Front View

Rear View

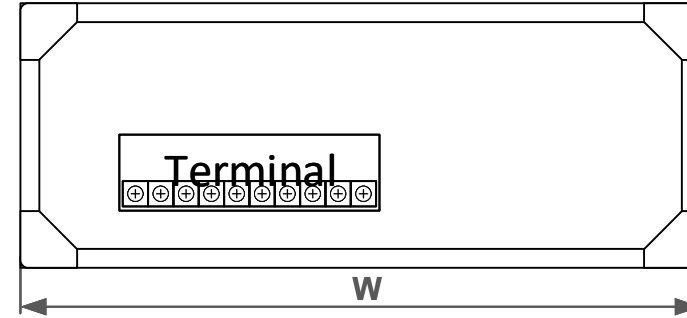

Right View

- Detail :**
- แสดงผลด้วยตัวเลข 7 SEGMENT สีแดง 5 หลัก 2 แนว
 - รับอินพุตผ่าน RS485 Modbus RTU (เป็นตัว Slave)
 - สามารถอ่านเขียนข้อมูลผ่าน Function Modbus RTU
 - รองรับการเขียนด้วย Function 0X06 0x10
 - รองรับการอ่านด้วย Function 0x03 และ 0x04
 - สามารถแก้ไข/ตั้งค่า Address ได้ [1 – 255]
 - สามารถแก้ไข/ตั้งค่า Baud Rate ได้ [4800, 9600, 19200, 38400, 57600]
 - ตั้งค่าการทำงานได้จากรีโมท

Address Register		Name	Function	Format
DEC	HEX		Support	
0	00H	Value	03H 04H, 10H	Int 16bits
1	01H	Decimal Point Value	03H 04H, 10H	Int 16bits
2	02H	EEPROM 0	03H 04H, 10H	Int 16bits
3	03H	EEPROM 1	03H 04H, 10H	Int 16bits
4	04H	EEPROM 2	03H 04H, 10H	Int 16bits
5	05H	EEPROM 3	03H 04H, 10H	Int 16bits


Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Display
Input	-
Output	-
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

REMARK		
Frame	Aluminum	
Color	Black	
Protection	IP30	
Model	TGM-62105	
APPEND		
Dimension	1.2"	<input type="checkbox"/>
	2.3"	250W x 150H x 100Dmm. <input checked="" type="checkbox"/>
	4"	500W x 200H x 100Dmm. <input type="checkbox"/>
Character	Arial (Font), White PVC Sticker	



PRIMUS CO., LTD.	
Draft by	Suphot
Date	19.07.2019
Revision	0
Customer	
Approve	
Program Process	3 day.

Left View

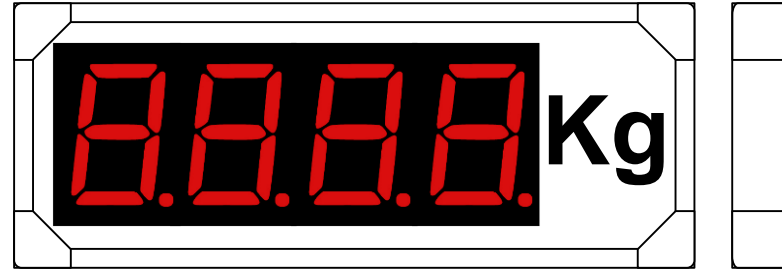

Front View

Rear View

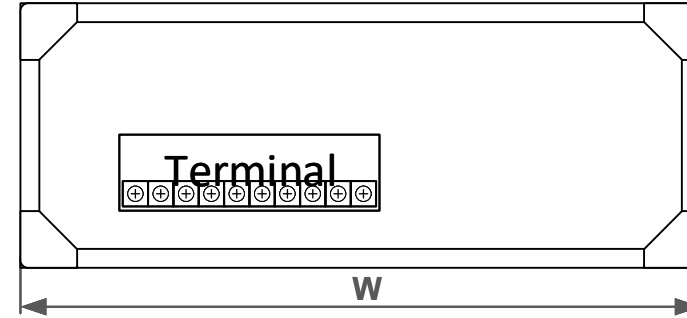

Right View

- Detail :**
- แสดงผลด้วยตัวเลข 7 SEGMENT สีแดง 5 หลัก 2 แนว
 - รับอินพุตผ่าน RS485 Modbus RTU (เป็นตัว Slave)
 - สามารถอ่านเขียนข้อมูลผ่าน Function Modbus RTU
 - รองรับการเขียนด้วย Function 0X06 0x10
 - รองรับการอ่านด้วย Function 0x03 และ 0x04
 - สามารถแก้ไข/ตั้งค่า Address ได้ [1 – 255]
 - สามารถแก้ไข/ตั้งค่า Baud Rate ได้ [4800, 9600, 19200, 38400, 57600]
 - ตั้งค่าการทำงานได้จากรีโมท

Address Register		Name	Function	Format
DEC	HEX		Support	
0	00H	Value	03H 04H, 10H	Int 16bits
1	01H	Decimal Point Value	03H 04H, 10H	Int 16bits
2	02H	EEPROM 0	03H 04H, 10H	Int 16bits
3	03H	EEPROM 1	03H 04H, 10H	Int 16bits
4	04H	EEPROM 2	03H 04H, 10H	Int 16bits
5	05H	EEPROM 3	03H 04H, 10H	Int 16bits

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Display
Input	-
Output	-
Memory	EEPROM with Battery
Setting	Remote
Communication	RS485 Modbus RTU

REMARK		
Frame	Aluminum	
Color	Black	
Protection	IP30	
Model	TGM-62105	
APPEND		
Dimension	1.2"	<input type="checkbox"/>
	2.3"	250W x 150H x 100Dmm. <input type="checkbox"/>
	4"	500W x 200H x 100Dmm. <input checked="" type="checkbox"/>
Character	Arial (Font), White PVC Sticker	

PRIMUS CO., LTD.		
Draft by	Suphot	
Date	19.07.2019	
Revision	1	
Customer		
Approve		
Program Process	3	day.

ราคาตั้ง

7 Segment Big Display

TGM-62105 [2.3"]: 12,600 บาท

TGM-62105rev1 [4"]: 17,800 บาท