



Front View



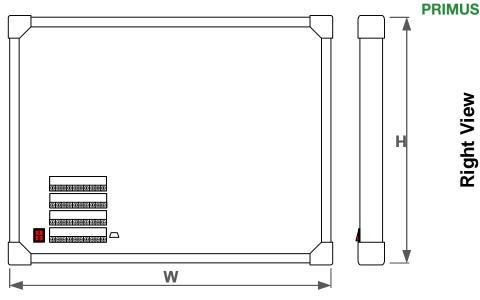

- Detail: 7 Segment Size 4" สีแดง 6 หลัก
 - Input current 4-20mA 6 ch
 - Output Relay Alarm 6 ch
 - สามารถเชื่อมต่อ RS485 Modbus RTU
 - สามารถตั้งค่าการทำงานผ่าน Remote ได้
 - Input Supply 220VAC
 - Output Supply 12VDC/2A

- ตั้งค่า Scale min / max ได้ -19999 ถึง 99999
- สามารถตั้งค่า ทศนิยมได้ 0.000, 0.00, 0.0, 0
- Alarm สามารถตั้งค่า mode ได้ 4 รูปแบบ (1)Alarm high low (2)Alarm high (3)Alarm low (4) Alarm high low Range

: สามารถตั้งค่า Baud rate ได้ 4800 9600 19200 38400 57600 RS485

: สามารถตั้งค่า Parity ได้ none odd even

MODBUS : สามารถตั้งค่า Slave Address ได้ 1-240

: สามารถ อ่านได้ ผ่าน Function RTU 03h / 04h

: สามารถ เขียนได้ ผ่าน Function RTU 10h

Modbus แยก 2 Slave address คือ 3 แถวบน และ 3 แถวล่าง

Technical Specification

Power Supply	100-240 VAC, 50-60Hz
Display	7 Segment Size 4"
Input	current 4-20mA 6 ch
Output	Relay Alarm 6 ch
Memory	EEPROM with Battery
Setting	Remote IR.
Communication	-

		REMARK
Frame	А	luminum
Color	В	lack
Protection	IF	30
Model	Т	GM-63117
		APPEND
Dimension	1.2"	
milli meter (mm.)	2.3"	
(1.2", 2.3", 4", 8", 12")	4"	1250W x 1000H x 100D mn ✓
Character	Arial	(Font), White PVC Sticker

	PRIMUS CO., LTD.
Draft by	Suphot
Date	09.09.2020
Revision	0
Customer	

|--|

Program Process day.

F-RD-12 rev.0



ราคาตั้ง Big Display 4" TGM-63117 [4"]: <u>56,200</u> บาท