

VIAVI

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2793
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)

Date : 01/12/2025 12:20

Test Setup

OTDR EXPERT

1550nm

30ns

5km

64cm

10.0s

1.46800(G652 G657)

-81.0 dB

Alarms

Thresholds

None

Summary

Filename
24 f 22 no piprahi gp to tp.msor

Laser nm

1550

Link Loss dB

2.866

Link Orl dB

43.61

Fiber End Km

2.058

Direction


LOC A > LOC B

Event

10

Alarms

OTDR 1550nm

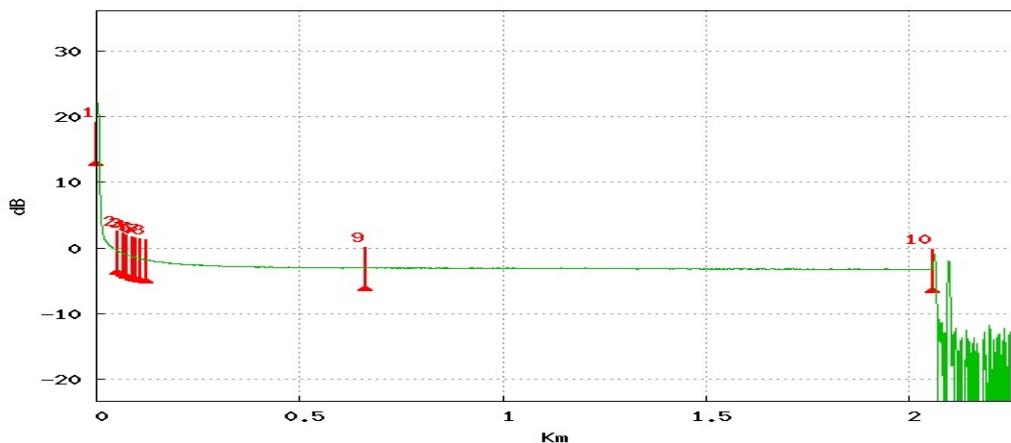

Event	Distance	Loss	Reflect.	Slope	Section	T. Loss
	Km	dB	dB	dB/km	Km	dB
1	0.000	0.425	>-21.03		0.000	0.000
2	0.053	0.432			0.053	0.010
3	0.066	0.206			0.013	0.445
4	0.076	0.260			0.010	0.653
5	0.088	0.121			0.012	0.916
6	0.096	0.172			0.008	1.038
7	0.107	0.188			0.011	1.213
8	0.124	0.573			0.017	1.404
9	0.662	-0.144		1.456	0.537	2.760
10	2.058		-62.32	0.156	1.396	2.866