

VIAVI

Cable Id : Cable
 Location A : Loc A
 Job ID :

Fiber Id/Number : Fiber 79
 Location B : Loc B
 Technician Id :

SmartOTDR (S/N 92589)

E100AS (S/N 92589)

Calibration Date : 29/09/2025

Date : 24/11/2025 14:46 (UTC+0)

Test Setup

OTDR EXPERT
 Alarms

Thresholds

None

Summary

Filename	Laser nm	Link Loss dB	Link ORL dB	Fiber End Km	Direction	Avg Loss dB/Km	Event	Alarms
F11.sor	1550	1.962	36.27	4.993	Loc A -> Loc B	0.393	4	

1/4
 0.000

2/4
 2.502

3/4
 4.799


4/4
 4.993 Km

A : 0.000km -9.319 dB
 B : 8.000km -20.688 dB

A-B : 8.000km 1.421 dB/Km

11.369 dB

OTDR 1550nm

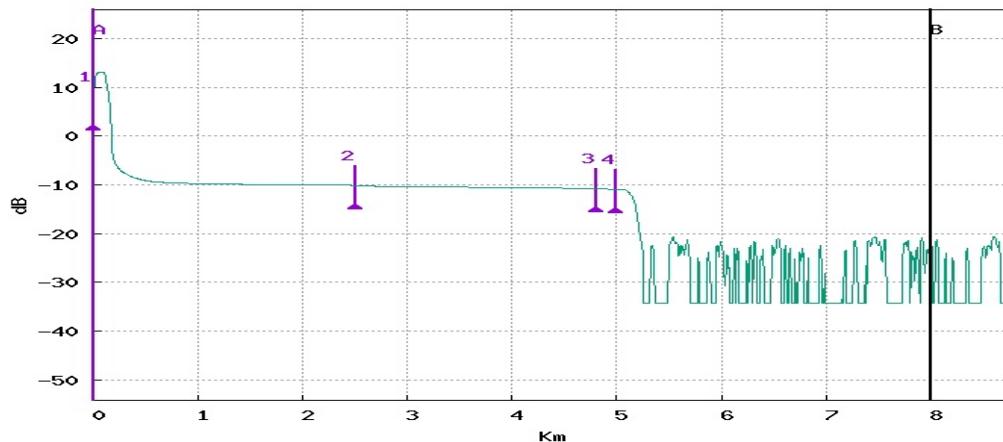

Event	Distance	Loss	Reflect.	Slope	Section	T. Loss
	Km	dB	dB	dB/km	Km	dB
1	0.000	9.068	-24.76		0.000	0.000
2	2.502	0.162		0.206	2.502	1.035
3	4.799	0.090		0.209	2.297	1.679
4	4.993				0.194	1.962