

VIAVI

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2776
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)

Date : 30/11/2025 16:30

Test Setup

OTDR EXPERT

1550nm

30ns

5km

64cm

10.0s

1.46800(G652 G657)

-81.0 dB

Alarms

Thresholds

None

Summary

Filename

24 f 13 no hardi gp to tp .msor

Laser nm

1550

Link Loss dB

2.918

Link Orl dB

46.37

Fiber End Km

0.803

Direction

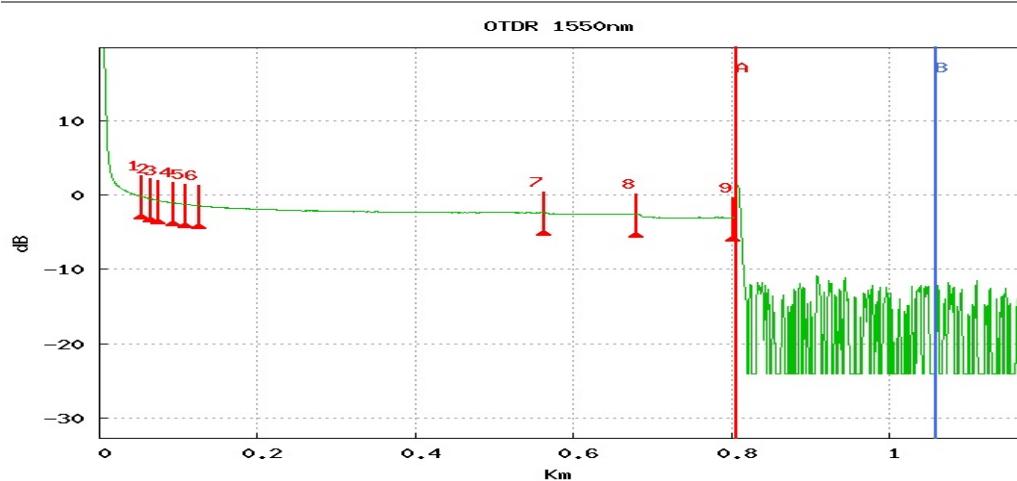
LOC A > LOC B

Event

9

A : 0.807Km 0.208 dB
B : 1.059Km -24.083 dB

A-B : 0.252Km 96.332 dB/Km

24.291 dB

Event	Distance Km	Loss dB	Reflect. dB	Slope dB/km	Section Km	T. Loss dB
1	0.054	0.376			0.054	0.012
2	0.066	0.210			0.012	0.390
3	0.075	0.300			0.010	0.601
4	0.093	0.201			0.018	0.904
5	0.109	0.165			0.016	1.110
6	0.126	0.150			0.017	1.279
7	0.564	0.201			0.438	2.196
8	0.680	0.503			0.116	2.402
9	0.803	-56.70	0.100		0.124	2.918