

VIAVI

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2827
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)

Date : 04/12/2025 15:18

Test Setup

OTDR EXPERT

1550nm

30ns

20km

1.2m

26.1s

1.46800(G652 G657)

-81.0 dB

Alarms

Thresholds

None

Summary

Filename
24 f 03 no dadari gp to tp.msor

Laser nm
1550

Link Loss dB
9.738

Link Orl dB
36.00


Fiber End Km
16.169

Direction
LOC A > LOC B

Event
9

Alarms

OTDR 1550nm

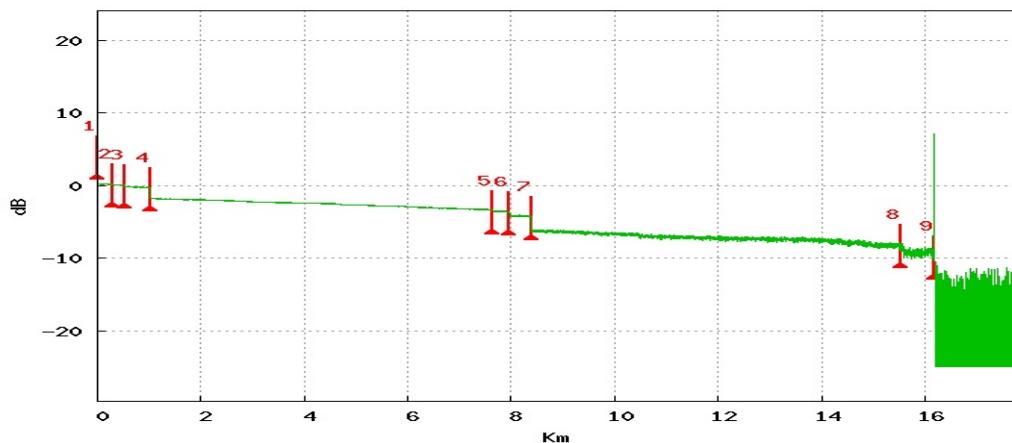

Event	Distance	Loss	Reflect.	Slope	Section	T. Loss
	Km	dB	dB	dB/km	Km	dB
1	0.000		-51.08		0.000	0.000
2	0.299	0.075		0.125	0.299	0.038
3	0.525	0.222		0.126	0.226	0.143
4	1.011	1.465		0.208	0.486	0.466
5	7.630	0.193		0.239	6.619	3.514
6	7.967	0.573		0.246	0.337	3.791
7	8.382	2.025		0.144	0.415	4.423
8	15.544	0.138		0.264	7.162	8.342
9	16.169		-31.45		0.625	9.738