

VIAVI

Cable Id :
Location A : LOC A
Job Id :

Fiber Id : Fiber 2793
Location B : LOC B
Technician Id :

SmartOTDR (S/N 28162)

E100AS (S/N 28162)

Date : 01/12/2025 12:20

Test Setup

OTDR EXPERT

1550nm

30ns

5km

64cm

10.0s

1.46800(G652 G657)

-81.0 dB

Alarms

Thresholds

None

Summary

Filename
24 f 06 no piprahi gp to tp.msor

Laser nm

1550

Link Loss dB

2.866

Link Orl dB

43.61

Fiber End Km

2.058

Direction


LOC A > LOC B

Event

10

Alarms

OTDR 1550nm

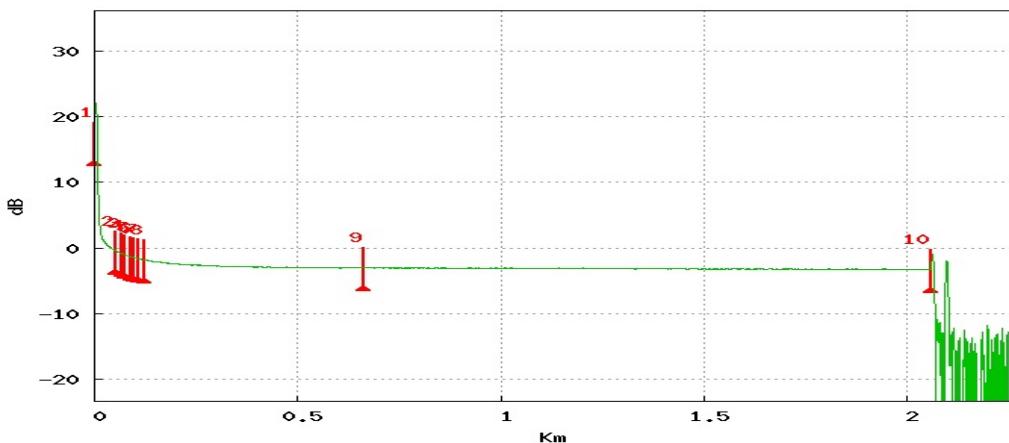

| Event | Distance | Loss | Reflect. | Slope | Section | T. Loss |
|-------|----------|--------|----------|-------|---------|---------|
| | Km | dB | dB | dB/km | Km | dB |
| 1 | 0.000 | 0.425 | >-21.03 | | 0.000 | 0.000 |
| 2 | 0.053 | 0.432 | | | 0.053 | 0.010 |
| 3 | 0.066 | 0.206 | | | 0.013 | 0.445 |
| 4 | 0.076 | 0.260 | | | 0.010 | 0.653 |
| 5 | 0.088 | 0.121 | | | 0.012 | 0.916 |
| 6 | 0.096 | 0.172 | | | 0.008 | 1.038 |
| 7 | 0.107 | 0.188 | | | 0.011 | 1.213 |
| 8 | 0.124 | 0.573 | | | 0.017 | 1.404 |
| 9 | 0.662 | -0.144 | | 1.456 | 0.537 | 2.760 |
| 10 | 2.058 | | -62.32 | 0.156 | 1.396 | 2.866 |