VIAVI

Cable Id :	**Fiber Id :** Fiber 2776
Location A : LOC A	**Location B :** LOC B
Job Id :	**Technician Id :**

SmartOTDR (S/N 28162)	E100AS (S/N 28162)	Date : 29/11/2025 17:47

Test Setup						
OTDR EXPERT	1550nm	30ns	2km	32cm	10.0s	1.46800(G652 G657)	-81.0 dB
Alarms						
Thresholds	None					
Summary						
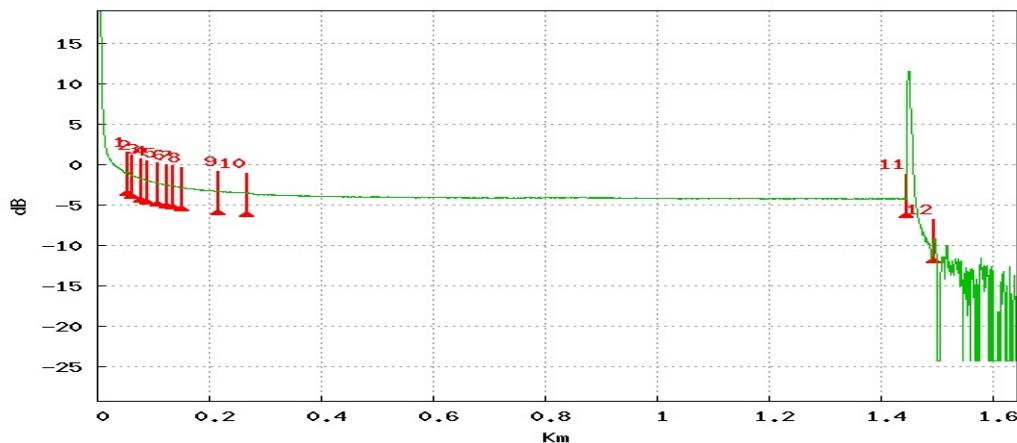
Filename	Laser nm	Link Loss dB	Link Orl dB	Fiber End Km	Direction	Event	Alarms
24 f 10 khairi gp to tp .msor	1550	8.775	39.40	1.493	LOC A -> LOC B	12	

OTDR 1550nm

Event		Distance	Loss	Reflect.	Slope	Section	T. Loss
		Km	dB	dB	dB/km	Km	dB
1		0.053	0.320			0.053	0.010
2		0.062	0.422			0.009	0.334
3		0.079	0.248			0.017	0.758
4		0.090	0.282			0.011	1.008
5		0.107	0.218			0.017	1.293
6		0.123	0.119			0.017	1.514
7		0.134	0.184			0.011	1.636
8		0.152	0.168			0.018	1.823
9		0.216	0.121			0.065	2.272
10		0.268	0.431			0.052	2.480
11		1.445	5.106	-33.24	0.333	1.176	3.301
12		1.493				0.049	8.775