FANUC ROBOT PREVENTIVE MAINTENANCE | INSIDE A KRC PM VISIT

THE KRC 24-POINT PM CHECKLIST

Every robot is **inspected, serviced and re-inspected**, with photos and a written report, so you see exactly what we found and what we fixed.

24	48	J1–J6	1
Inspection points	Graded before & after	Every axis covered	Report per robot

See the difference

What a grease change does


Over time, reducer grease breaks down and turns dark. Worn-out grease means more friction, more heat and faster wear on the most expensive parts of the robot.

We purge the old grease and refill each axis until clean grease comes through, and photograph both so you can see the result.

J2 axis, FANUC M-410iB. Photos from a real KRC PM visit.



BAD Old grease

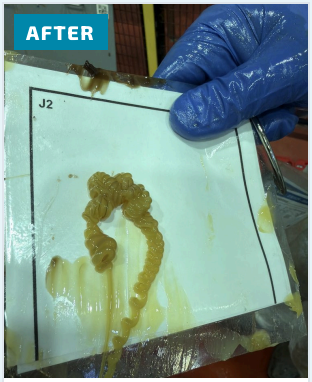

GOOD Fresh grease

Why PM pays

Less downtime
Catch wear on your schedule, not mid-shift.

Data protected
Backups and fresh batteries keep programs and mastering safe.

Longer life
Clean grease and a cool controller slow wear.

Proof on paper
Graded, photo-backed records for your files.

How a visit works

1 Plan
Scheduled around your downtime.

2 Back up
Full program backup before any work.

3 Inspect
All 24 points graded and photographed.

4 Service
Grease, batteries, bolts, cleaning.

5 Re-inspect
All 24 points graded again.

6 Quote extras
Anything outside scope is quoted first.

7 Report
Written report with photos, per robot.

1–2 Days per robot
Depending on size and condition.

The 24-point checklist

Graded BEFORE and AFTER service: GOOD ok AVERAGE monitor BAD quoted first | Teal = serviced

Robot arm and mechanical unit			POINTS 1–6
1	**General cleanliness**	Dust and splatter build-up. **Arm cleaned, bolts retightened.**	BEFORE AFTER
2	**External paint**	Chips and impact marks that point to a collision.	BEFORE AFTER
3	**Cable protective sleeves**	Wear, splits and rubbing on the dress pack.	BEFORE AFTER
4	**J1 axis swing stopper**	Damage or deformation from a past hit.	BEFORE AFTER
5	**J1–J6 mechanical stoppers**	Hard stops on every axis checked for damage.	BEFORE AFTER
6	**End-effector**	Tooling condition and mounting. **Bolts re-torqued.**	BEFORE AFTER
Reducer grease			POINTS 7–12
7–12	**J1–J6 grease**	Leak check. **J1–J5 grease replaced, J6 reducer greased.**	BEFORE AFTER
Motors and encoders			POINTS 13–18
13–18	**J1–J6 motor & encoder**	Damage and connectors. **Mechanical unit batteries replaced.**	BEFORE AFTER
Controller and cabling			POINTS 19–22
19	**Robot to controller cable**	Cuts, crushing, kinks and connectors.	BEFORE AFTER
20	**Controller cleanliness**	Dust inside the cabinet. **Cleaned, controller batteries replaced.**	BEFORE AFTER
21	**Controller ventilation**	Fans and airflow. **Heat exchanger cleaned.**	BEFORE AFTER
22	**Robot alarms**	Alarm history reviewed for recurring faults.	BEFORE AFTER
Teach pendant			POINTS 23–24
23	**Teach pendant**	Screen, keys, enabling switch and E-stop.	BEFORE AFTER
24	**Teach pendant cable**	Jacket and strain relief.	BEFORE AFTER

What you receive: a report for every robot

KURTIN ROBOTICS COMPANY

Preventative Maintenance Report — ONE REPORT PER ROBOT

INSPECTION POINT	PHASE	RATING	PHOTO	COMMENTS
J2 grease	Before	BAD		What we found
J2 grease	After	GOOD		What we did

Want your PM handled every year?

KRC Care: an annual PM visit, support hours and priority response for one fixed annual price.

Ready to schedule: **admin@kurtinrobotics.com** | **(832) 305-5237**

Pricing, travel and billing terms: see the KRC FANUC PM Info Sheet. FANUC is a registered trademark of FANUC Corporation.