





ROOF HORIZONTAL LIFELINE  
SYSTEM OS1000

VALUABLE CUSTOMERS



AND MANY MORE.....

15 YEARS WARRANTY ON FIXED COMPONENTS

\*T&C APPLY

## PROFILE

OMKAR SAFETY AND POWER PVT LTD WAS SOLUTION FOR ALL TYPE HEIGHT SAFETY EQUIPMENTS. OMKAR PROVIDE ROOFTOP FIXED HORIZONTAL LIFELINE SYSTEM.

## APPLICATION

INSTALL ON WALLS, FLOORS, CEILINGS, PRE ENGINEERING BUILDINGS ROOF, FRAGILE ROOFS, AIRPORTS TO THE CLIENT'S RECEIVING STRUCTURE

## CONTACT NUMBER

0124-4236614  
+91-9718290642

## E-MAIL I'D

[TECHSUPPORT@OMKARSAFETY.COM](mailto:TECHSUPPORT@OMKARSAFETY.COM)  
[INFO@OMKARSAFETY.COM](mailto:INFO@OMKARSAFETY.COM)

## WEBSITE

[WWW.OMKARSAFETY.IN](http://WWW.OMKARSAFETY.IN)


## INDIAMART WEBSITE

[WWW.OMKARSAFETY.COM](http://WWW.OMKARSAFETY.COM)

## CERIFICATIONS

EN 795:2012 CLASS C CEN/TS 16415:2013  
SATRA SPC0304000/2043

**SITE SURVEY FREE**

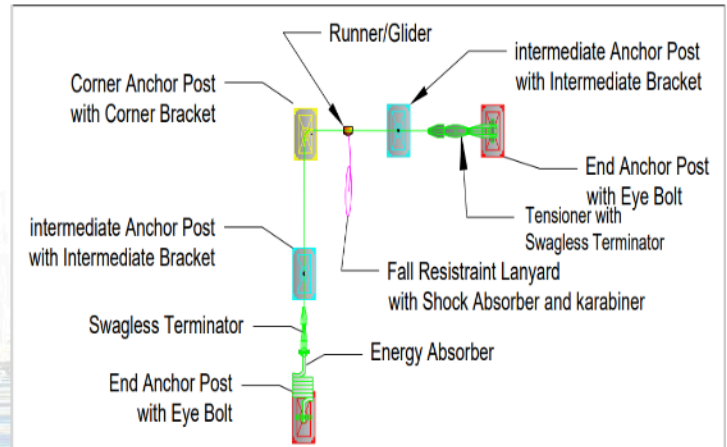

OS1000 ROOF HORIZONTAL LIFELINE SYSTEM PROVIDE ADEQUATE SAFETY TO THE ROOF WORKER AGAINST HAZARDS OF FALL FROM HEIGHT.

**THE FOLLOWING COMPONENTS ARE:**

- 1- ANCHOR POST (OS1001)
- 2- INTERMEDIATE ANCHOR POST (OS1001-A)
- 3-INTERMEDIATE BRACKET (OS1002)
- 4- CORNER POST (OS1001-B)
- 5- CORNER BRACKET (OS1003)
- 6- SS WIRE ROPE (OS1006)
- 7- ENERGY ABSORBER (OS1004)
- 8- TENSIONER WITH CABLE EXTREMITY (OS1003)
- 9- RUNNER (OS1007)
- 10- FULL BODY HARNESS WITH ROPE LANYARD (OS222)
- 11- WORK RESTRAINT ROPE GRAB GRIP (OSFRL01)
- 12- SWAG-LESS TERMINATOR (OS1008)
- 13- RIVETS
- 14- M12 BOLTS
- 15- EYE BOLTS


get in  
touch

**15 YEARS WARRANTY ON FIXED COMPONENTS**

\*T&C APPLY



## **TECHNICAL SPECIFICATION OF PRODUCT**



**OS1001 Anchor Post**  
Material – SS316  
Height – 150 mm  
Size – 415\*355mm  
Pipe –  $\varnothing 102 \times \varnothing 96$  mm



**OS1002 Intermediate bracket**  
Material – SS316  
Height – 70 mm  
Strip – 40\*3mm  
Pipe –  $\varnothing 12 \times \varnothing 9$  mm



**OS1003 Tensioner**  
Material – SS316  
Length – 300 mm  
OD – 25mm  
Thread – M16  
Damn Pin- 10mm



**FULL BODY HARNESS**



**OS1004 Energy absorber**  
Material – SS316  
Length – 240 mm  
ID – 57.6mm  
OD- 83mm  
Rod Dia – 12.7mm



**OS1005 Corner bracket**  
Material – SS316  
Height – 70 mm  
Strip – 40\*3mm  
Pipe –  $\varnothing 12 \times \varnothing 9$  mm



**OS1006 Wire rope**  
Material – SS316  
Dia – 8 mm  
Made-7\*19mm  
Strength- 3600kg



**RUNNER**



**OS1001-A Intm. Post**  
Material – SS316  
Height – 150 mm  
Size – 415\*355mm  
Pipe –  $\varnothing 102 \times \varnothing 96$  mm



**OS1001-B Corner Post**  
Material – SS316  
Height – 150 mm  
Size – 415\*355mm  
Pipe –  $\varnothing 102 \times \varnothing 96$  mm



**M12 & Eye Bolt Anchor Post**  
Material – SS304



**CABLE EXTRIMITY**

**15 YEARS WARRANTY ON FIXED COMPONENTS**

\*T&C APPLY