

HORIZONTAL LIFELINE SYSTEM (OVERHEAD)

OS3000



VALUABLE CUSTOMERS



AND MANY MORE.....

15 YEARS WARRANTY ON FIXED COMPONENTS

PROFILE

OMKAR SAFETY AND POWER PVT LTD WAS SOLUTION FOR ALL TYPE HEIGHT SAFETY EQUIPMENTS. OMKAR PROVIDE ROOFTOP FIXED HORIZONTAL LIFELINE SYSTEM.

APPLICATION

INSTALL ON WALLS, FLOORS, CEILINGS, PRE ENGINEERING BUILDINGS ROOF, FRAGILE ROOFS, AIRPORTS TO THE CLIENT'S RECEIVING STRUCTURE

CONTACT NUMBER

0124-4236614
+91-9718290642

E-MAIL I'D

TECHSUPPORT@OMKARSAFETY.COM
INFO@OMKARSAFETY.COM

WEBSITE


WWW.OMKARSAFETY.IN

INDIAMART WEBSITE

WWW.OMKARSAFETY.COM

CERIFICATION

EN 353-1:2014 CLASS C
SATRA SPC0304000/2043

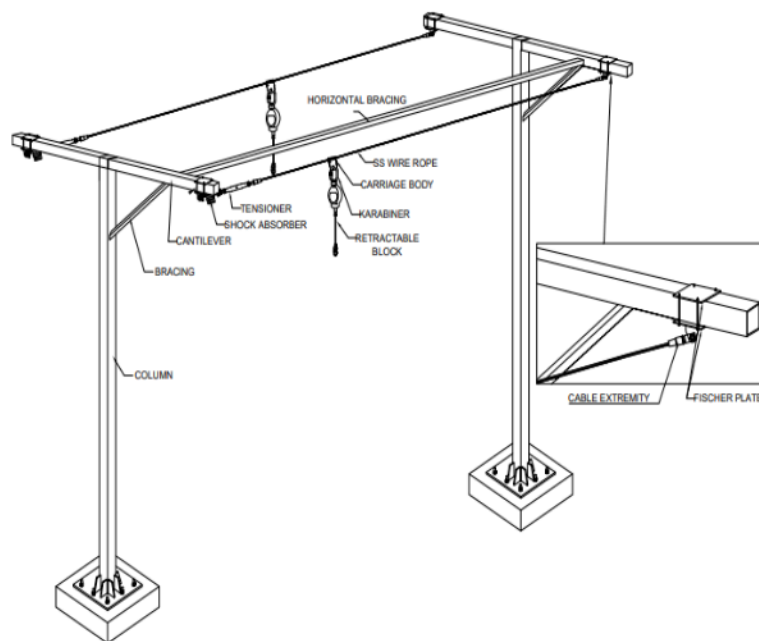

ADEQUATE SAFETY TO THE WORKER AGAINST HAZARDS OF FALL FROM HEIGHT.


THE FOLLOWING COMPONENTS ARE:-

- 1- MOUNTING BRACKET (OS3001)
- 2- INTERMEDIATE BRACKET (OS3005)
- 3- SS WIRE ROPE (OS1006)
- 4- ENERGY ABSORBER (OS2002)
- 5- TENSIONER WITH CABLE EXTREMITY (OS1003)
- 6- FULL BODY HARNESS
- 7- RETRACTABLE BLOCK
- 8- RUNNER (OS3006)
- 9- M12 BOLTS
- 10- SWAG-LESS TERMINATOR (OS1008)


get in
touch

15 YEARS WARRANTY ON FIXED COMPONENTS

TECHINAL SPECIFICATION OF PRODUCT



OS3001 Mounting bracket
Material – SS316
Height – 120 mm
Size – 200*50*10mm
Hole – 12mm



OS3005 Intermediate bracket
Material – SS316
Height – 70 mm
Strip – 40*3mm
Pipe – $\phi 12 \times \phi 9$ mm



OS1003 Tensioner
Material – SS316
Length – 300 mm
OD – 25mm
Thread – M16
Damn Pin- 10mm




OS2002 Energy absorber
Material – SS316 Length – 240 mm
ID – 57.6mm
OD- 83mm
Rod Dia – 12.7mm



RETRACTABLE BLOCK



OS1006 Wire rope
Material – SS316
Dia – 8 mm
Made-7*19mm
Strength- 3600kg

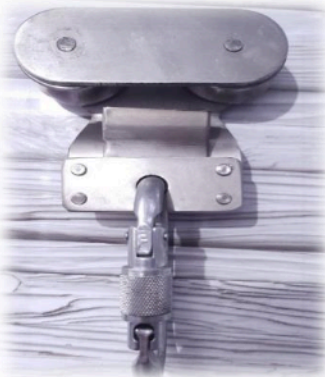

OS3006-RUNNER



OS556 -FULL BODY HARNESS



M12 Bolt
Material – SS304



OS1008-CABLE EXTRIMITY

15 YEARS WARRANTY ON FIXED COMPONENTS