

”

The widest range of cable trays on the market

The X-Tray cable management system offers endless possibilities and is a unique concept for smart cable management.




Timeline

2010 – Axelent Wire Tray established as a sales company

2016 – Merged into a business area within Axelent AB

2022 – Divided to a stand-alone company under Axelent Holding

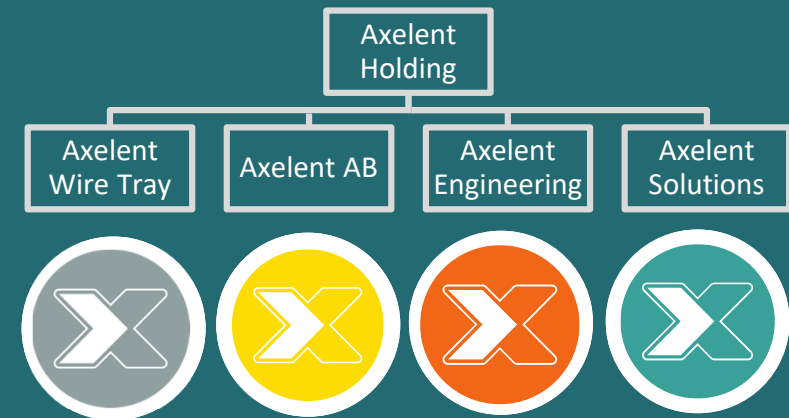

Strategy

Target 10M€

Area	Target	Strategy
Global	Direct customers within growth segment	Adding sales resources internally
USA	Relevance presence (tbd)	Added resources for business development
Europe & Middle East	Increase sales network	Adding partners in new countries

Current representation

Europe

Germany +Austria

Switzerland

UK (Stainless)

Outside Europe

Chile


Added since 2022

Benelux

Poland



Expansion 2024, 2500sqm

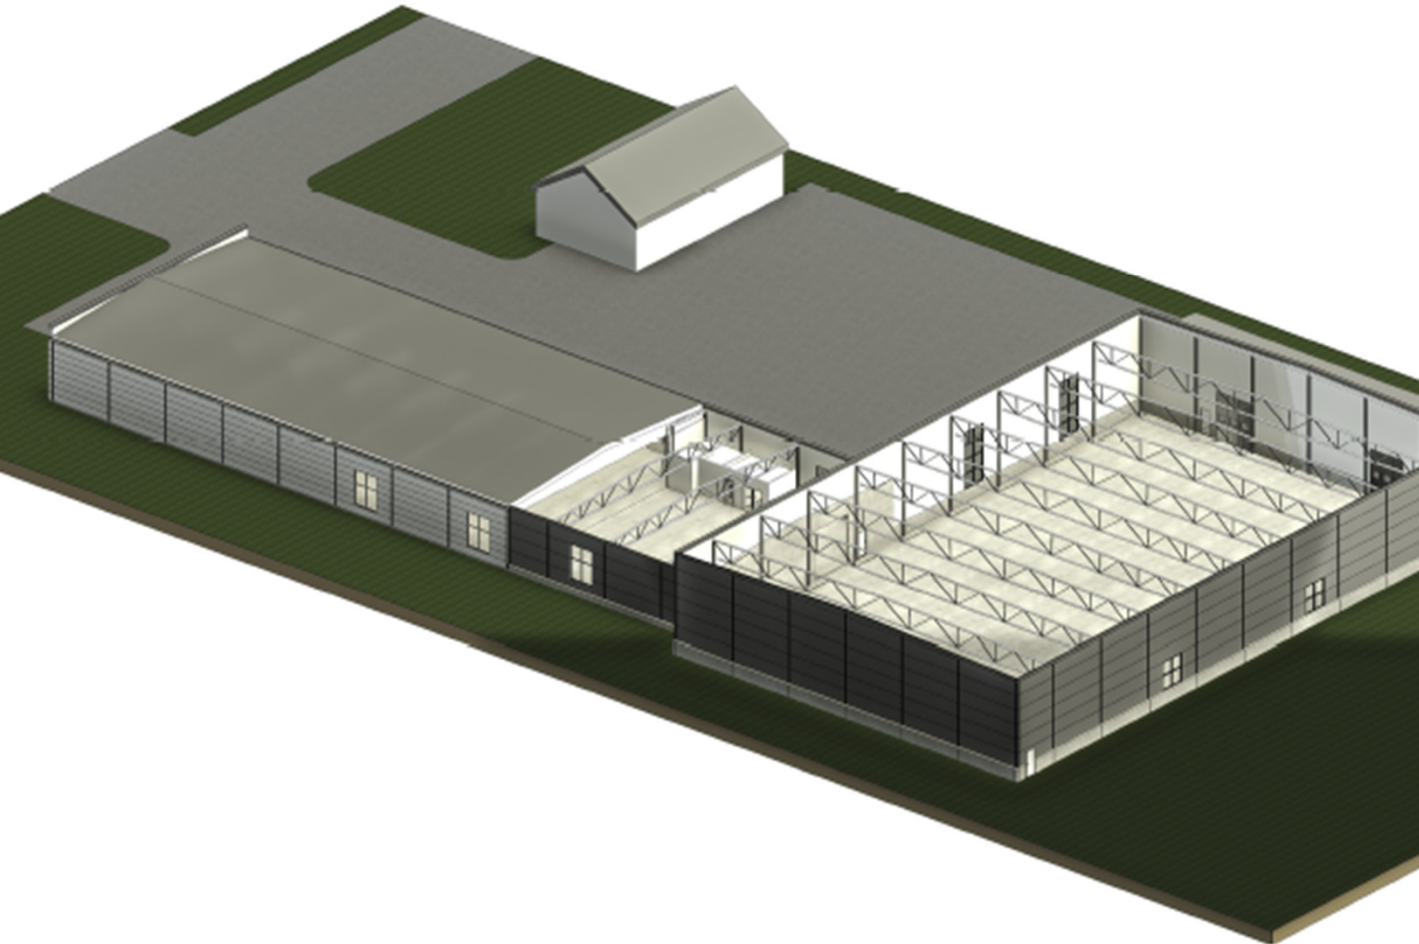

Made in Hillerstorp Works Global

Our head office is in Hillerstorp. All our product development and production takes place here and our functions as a central warehouse.

The System

The widest and most flexible system on the market. Our solutions is well thought out to simplify our customers daily operation.



X-Tray – a premium brand

- ✓ Distance between supports up to 2.5 m.
- ✓ Rapid Assembly – Neat Installation – Secure Results.
- ✓ Marked X-Tray. S/S also marked with either 304L or 316L.
- ✓ Only M8 bolt to all installations.
- ✓ Only two tools required: Bolt cutters and a 13 mm spanner.
- ✓ Optional placement of joints between the support brackets.
- ✓ The strongest quick joining on the market.
- ✓ A range of materials and finishes for a variety of environments.



Certified and approved

- ✓ IEC 61537 (Europe)
- ✓ DNV GL (Offshore Standard)
- ✓ NEMA VE 1 & CSA C22.2 (UL for US)
- ✓ E90 & E120 (Fire Resistance)
- ✓ EHEDG (Food industry)



Corrosion resistance

- ✓ Zinc Plated
- ✓ Hot Dip Galvanized
- ✓ Sendzimir
- ✓ Stainless Steel 304L
- ✓ Stainless Steel 316L

						
Corrosivity classification	C1	C2	C3	C4	C5	CX
Environmental corrosivity	Very low	Low	Moderate	High	Very high	Extreme
Outdoors	-	Low concentrations of air pollution, rural areas	Moderate amounts of air pollution. Urban areas and light industry areas	Considerable amounts of air pollution or moderate amounts of salt, industry and coastal regions.	Industrial areas with harsh climates and high humidity. Coastal and offshore areas with large amounts of salt	Extreme industrial, coastal and offshore areas in subtropical and tropical climates with salt and contamination, lap zones
Indoor	Heated areas with dry air and insignificant amounts of contaminants. E.g., offices, stores, schools, hotels	Non-heated areas with fluctuating temperatures and humidity. E.g., sports arenas, storage premises	Moderate humidity and certain amounts of air pollution. E.g., breweries, dairies, laundries, heated ice skating arenas	High humidity and large amounts of air contamination. E.g., chemical industries, indoor swimming pools, shipyards, unheated skating arenas	Permanent moisture condensation and large amounts of air pollution	Extreme humidity condensation and extremely harsh climate
Recommended material/coating	Zinc Plated – Fzb	Sendzimir		Hot Dip galv. / Zinc-nickel Fzv		Stainless 304L
						Stainless 316L

Product Range Trays




U-Tray

26 models

53-620mm width

30-110mm height

“The Generalist”



C-Tray

3 models

70-220mm width

68-120mm height

“Increased Protection”



Z-Tray


6 models

42-120mm width

42-120mm height

“Food Guru”

Product Range Trays




G-Tray

2 models

60-120mm width

100-150mm height

“Loading Machine”




Flat Tray

1 models

157mm width

Other models upon demand

“Super Slim Fit”



Mini-Tray

3 models

30-40mm width

22-32mm height

“The Single”



Join/Bend
X1-5

What should you do?

No matter what
ONE Bolt & Nut
X61/62



Attach to wall
X10/15/19




Cover/Divide
X64-67



Attach
Accessories
X63/80



Pend from
roof or floor
X11/14/12/16/17/18

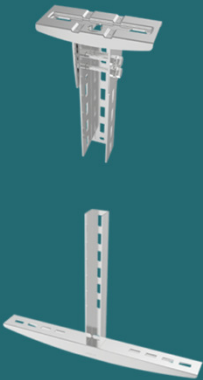

Pend even
further?
X50-55



A group of four people, three men and one woman, are standing in a warehouse or industrial setting. They are all smiling and appear to be engaged in a friendly conversation. The man on the left is wearing a dark jacket over a light-colored shirt. The woman in the center is wearing a dark jacket with a logo on the chest. The man on the right is also wearing a dark jacket. The woman on the far right is partially visible, wearing a dark jacket. They are standing in front of a metal wire mesh fence. The background shows the interior of a large warehouse with high ceilings and industrial equipment. A large, bold, yellow text "THANK YOU!" is overlaid on the center of the image.


THANK YOU!

Product Range Accessories Other

Welding Brackets




Additional Layer




U-Bar integration →

Pipe Clamps



Wall Bracket Sandwich Element

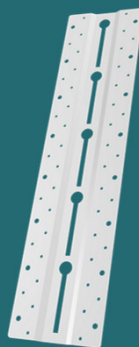

Support Distances

- ✓ Longest support distances
- ✓ Height and wire thickness
- ✓ Save accessories and time
- ✓ Market Comparison



Load diagram

Our diagram shows the recommended load in accordance with IEC 61537. 1.7 times these values gives the maximum permitted load. Equally divided load. Optional placement of joints between the support brackets.

- **X-Tray® height 110 mm**
59 kg/m. Recommended bracket spacing 2,5 m.
- **X-Tray® height 60 mm with 5 mm wire**
41 kg/m. Recommended bracket spacing 2,25 m.
- **X-Tray® height 60 mm with 4 mm wire**
24 kg/m. Recommended bracket spacing 2,25 m.
- **X-Tray® height 30 mm with 5 mm wire**
21 kg/m. Recommended bracket spacing 1,75 m.
- **X-Tray® height 30 mm with 4 mm wire**
18 kg/m. Recommended bracket spacing 1,75 m.

