

MICROPROCESSOR KARL FISCHER MOISTURE TITRATOR MODEL NO - ALE-1040




MICROPROCESSOR KARL FISCHER MOISTURE TITRATOR MODEL NO - ALE-1040

Microprocessor KF Moisture Titrator ALE-1040 is the finest volumetric titrator available. It uses the latest microcontroller technology and advanced engineering techniques so as to give enhanced accuracy and reproducibility. This titrator eliminates the use of conventional delicate and fragile glass burettes and plunger systems. This titrator analyses the moisture concentration of liquid samples, powder, fine particles and fiber samples that are soluble in alcohol or solvents. The moisture content is displayed in ppm, %age and mg H₂O. The system has 20 soft touch membrane type keys for ease of operation. Complete numeric keypad is provided so as to feed the values of sample, density, titer factor, date, time etc. comfortably. The End Point indication is given by both visual and audible alarm. The titrator has the facility for automatically calculating the titer factor of the Karl Fischer reagent. It has the storage facility of date, time, batch no. and final results of 20 titrations using the FIFO method. Provision for external printer attachment is available so that any of the stored results can be printed even at a later stage.


Accessories

- Dual Platinum Electrode
- Built-in Magnetic Stirrer
- Micropipette 25µl
- 250ml Bottle for Methanol (Titration Bottle)
- Adaptor for KF Reservoir
- Set of Dispenser Tubes
- Bottle Container (Extra Bottle)
- Dust Cover
- Titration Vessel with Teflon Cover
- Teflon Coated Magnetic Stirrer Capsule
- 250 ml Reservoir Bottle for KF Solution
- 250 ml bottle for Silica Gel
- Adaptor for Methanol Reservoir Bottle
- Set of Connecting Tubes
- Instruction Manual
- Software CD
- USB Cable
- Adaptor

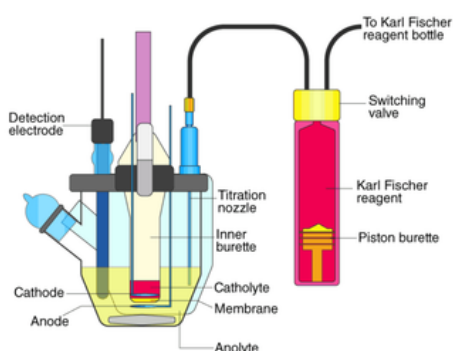

Applications

- Pharmaceutical Industry
- Chemical Industry
- Petrochemical Industry
- Oil & Lubricant Industry
- Food & Beverage Industry
- Cosmetic & Personal Care Industry
- Paint, Ink & Coating Industry
- Plastic, Polymer & Resin Industry
- Transformer Oil & Power Industry
- Research Laboratories & R&D Centers

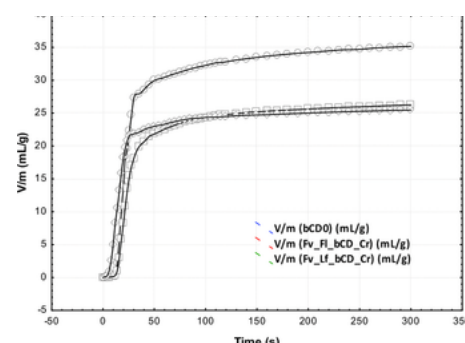

Features

- Auto Computation of Moisture in ppm, % & mg H₂O.
- Storage of Date, Time, Batch No. and Final Results
- Graphical LCD with Backlit
- Motorized Dispensing
- External Printer Attachment Facility (Optional)

MICROPROCESSOR KARL FISCHER MOISTURE TITRATOR MODEL NO - ALE-1040



MODEL NO.	ALE - 1040
Measuring Range	50ppm to 100% of moisture
Measuring Method	Karl Fischer Volumetric Titration method
K.F. Dispensing	Highly sensitive motorized dispensing system
Resolution of Titrant Volume	0.01 ml
Indication of Titrant Volume	0.00 to 99.99 ml on display
Moisture content calculation (Automatic)	%age: (0.00 to 100%) ppm: (10 to 9999999) mg H ₂ O: (0.00 to 999.99)
KF Titer Factor	In-built Automatic KF Titer Factor calculation facility
End Point Alarm	Audible Alarm
Dispensing Pump Calibration	Available through Key board
Wait Time for End Point	Adjustable (1 to 59 seconds)
Key Board	20 keys soft touch membrane type
Sample storage	Upto 20 latest samples using FIFO memory
Display	Graphical LCD with backlit
Clock	In-built clock with date & time display
Stirrer	In-built Magnetic stirrer with adjustable speed
Reagent Bottle	3 x 250ml bottle for KF Reagent, methanol & Silica Gel
PC Interface	USB Port
Power Supply	230V A.C. 10% 50 Hz
Dimension	385 x 290 x 140 mm (L x B x H)
Weight	15 kgs. (approx.)

Note: Technical Specifications, Appearance & Model number are subject to change without prior notice.