


MIN. $\frac{5}{8}$ " (16mm)x12"
(300mm) WIDE CEMENT
BOARD PANELS TO BE
INSTALLED PRE-POUR AS
FORM PANEL FOR
CONCRETE CAP AT TOP OF
WALL INSTALLED ON SLOPE
TO MATCH ROOF PITCH

ROOF SHEATHING &
SHINGLES AS PER
CODE

2x4 (38x89mm) TO
MATCH SLOPE OF ROOF
FASTENED THROUGH TO
CAVITY (PRE-POUR)

$\frac{5}{8}$ " (16mm) TYPE 'X'
GYPSUM BOARD FINISH IN
ATTIC BOTH SIDES,
TERMINATES AT CEMENT
BOARD

NUDURA 6" (152mm)
STANDARD FORM UNIT

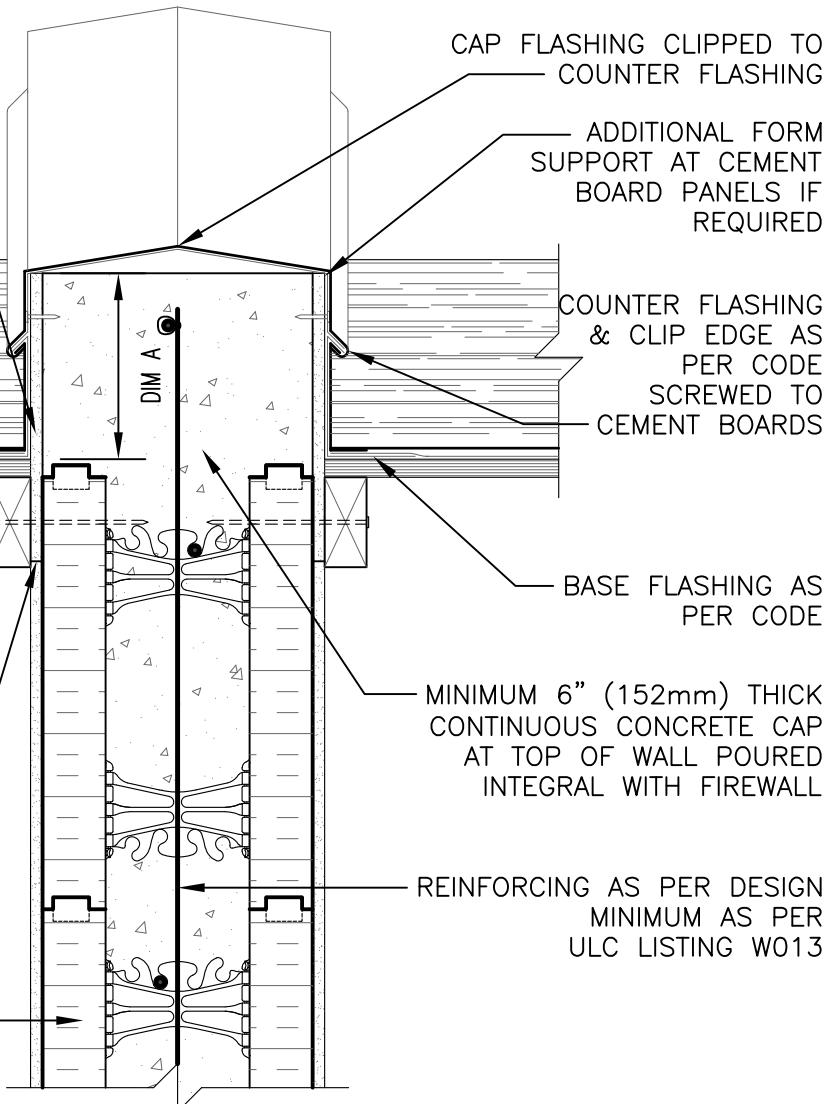

NOTE: DIMENSION 'A' MUST BE
MINIMUM 6" (152mm) AS PER
CODE FOR 2 HOUR FIREWALL
(CANADIAN CODE)

DISCLAIMER NOTICE:
SPECIFIC INFORMATION
REQUIRED FOR COMPLIANCE
WITH LOCAL CODES IS THE
RESPONSIBILITY OF THE
DESIGNER



NUDURA
INTEGRATED BUILDING TECHNOLOGY
Building Value.

NUDURA 6" (152mm) FORM UNIT
STC / FIRE WALL DETAILS
FIREWALL PROJECTION THROUGH
ROOF
2 HOUR FIREWALL (CAN)

| | |
|----------------------------|------------------|
| REV. NO. 003 KS | DWG NO. FW6D4 |
| REV. DATE: AUGUST 2010 | |
| DRAWN BY: T. VAN CLIEAF | SCALE: 1 : 8 |