US012409097B2

(12) **United States Patent**
Hadley

(10) **Patent No.: US 12,409,097 B2**
(45) **Date of Patent: Sep. 9, 2025**

(54) **MASSAGE DEVICE**

(71) Applicant: **John Stephen Hadley**, San Antonio, TX (US)

(72) Inventor: **John Stephen Hadley**, San Antonio, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/514,802**

(22) Filed: **Nov. 20, 2023**

(65) **Prior Publication Data**

US 2024/0342047 A1 Oct. 17, 2024

Related U.S. Application Data

(60) Provisional application No. 63/426,905, filed on Nov. 21, 2022.

(51) **Int. Cl.**
A61H 15/00 (2006.01)

(52) **U.S. Cl.**
CPC ***A61H 15/00*** (2013.01); *A61H 2015/0028* (2013.01); *A61H 2201/0123* (2013.01); *A61H 2201/0126* (2013.01); *A61H 2201/0157* (2013.01); *A61H 2201/1253* (2013.01); *A61H 2201/169* (2013.01)

(58) **Field of Classification Search**
CPC A61H 2201/0123; A61H 2201/0126; A61H 2015/0028; A61H 15/00; A61H 2205/081; A61H 2015/0014; A61H 2201/1623
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,577,129	A *	12/1951	Johnston	A61H 15/00	492/30
2,619,957	A *	12/1952	Hague	A61H 15/0092	601/122
3,078,484	A *	2/1963	Briggs	A47K 7/043	4/606
4,416,271	A *	11/1983	Chester	A61H 15/00	482/904
5,730,708	A *	3/1998	Spratt	A61H 7/003	601/118
5,935,090	A *	8/1999	Kennon	A61H 15/0092	601/134
7,087,004	B1 *	8/2006	Berke	A61H 7/002	601/134
9,849,065	B1 *	12/2017	Kozlevcar	A61H 39/04	
11,872,177	B1 *	1/2024	Graham	A61H 15/00	
2004/0009853	A1 *	1/2004	Smith	A63B 17/04	482/92

(Continued)

Primary Examiner — Justine R Yu
Assistant Examiner — Christopher E Miller
(74) *Attorney, Agent, or Firm* — Andrew S. Rapacke; The Rapacke Law Group

(57) **ABSTRACT**

A massage device can include a first wheel assembly, including a first base; a first wheel supported at a predetermined distance from a first side of the first base; at least one first stem attached to a second side of the first base; the massage device further including a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem, and wherein the body is constructed and arranged to prevent the at least one first stem from rotating within the at least one socket; and two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building.

20 Claims, 10 Drawing Sheets

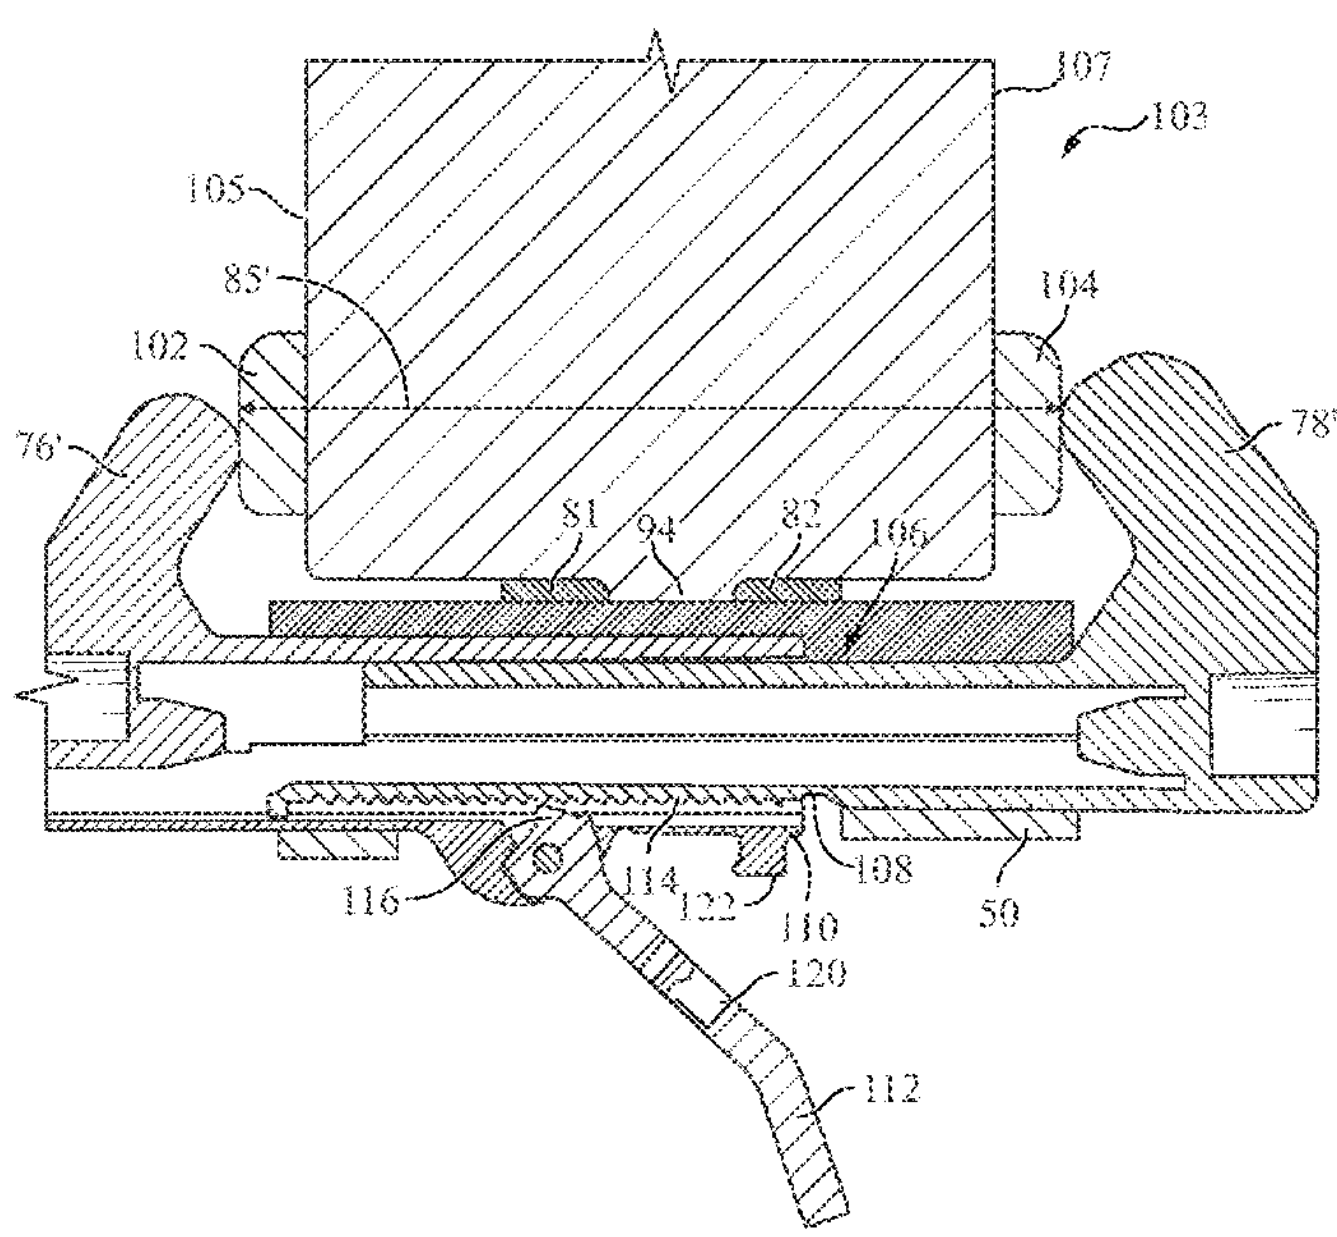

(56) **References Cited**

U.S. PATENT DOCUMENTS

2008/0077062	A1*	3/2008	Leiter	A61H 7/001 601/134
2008/0146979	A1*	6/2008	Brown	A61H 37/00 601/115
2010/0121235	A1*	5/2010	Sasano	A61H 7/001 601/134
2010/0222809	A1*	9/2010	Grabill	A61H 39/04 606/204
2011/0166481	A1*	7/2011	Rhoad	A61H 7/002 248/231.51
2013/0023807	A1*	1/2013	Hennessey	A61H 7/003 601/119
2013/0217544	A1*	8/2013	Anaya	A63B 23/1218 482/40
2015/0133271	A1*	5/2015	Jones	A61H 15/00 482/51
2016/0338901	A1*	11/2016	Cohen	A61H 15/00
2017/0312168	A1*	11/2017	Drath	A61H 1/0292
2018/0104143	A1*	4/2018	Jamieson	A61H 7/002
2018/0142832	A1*	5/2018	Inouye	F16M 13/022
2018/0296430	A1*	10/2018	Bouch	A61H 15/00
2019/0269573	A1*	9/2019	Paniccia	A61H 7/007
2019/0274914	A1*	9/2019	Hunter	A61B 90/50
2019/0307639	A1*	10/2019	Kiernan	A61H 1/0277
2020/0060927	A1*	2/2020	Bailey	A61H 15/00
2021/0121357	A1*	4/2021	Held	A61H 15/00
2021/0361519	A1*	11/2021	Hagy	A61H 7/005
2022/0096314	A1*	3/2022	Nagy	A61H 15/00
2022/0125665	A1*	4/2022	Allen	A61H 39/04
2022/0347036	A1*	11/2022	Dossman	A63B 23/035

* cited by examiner

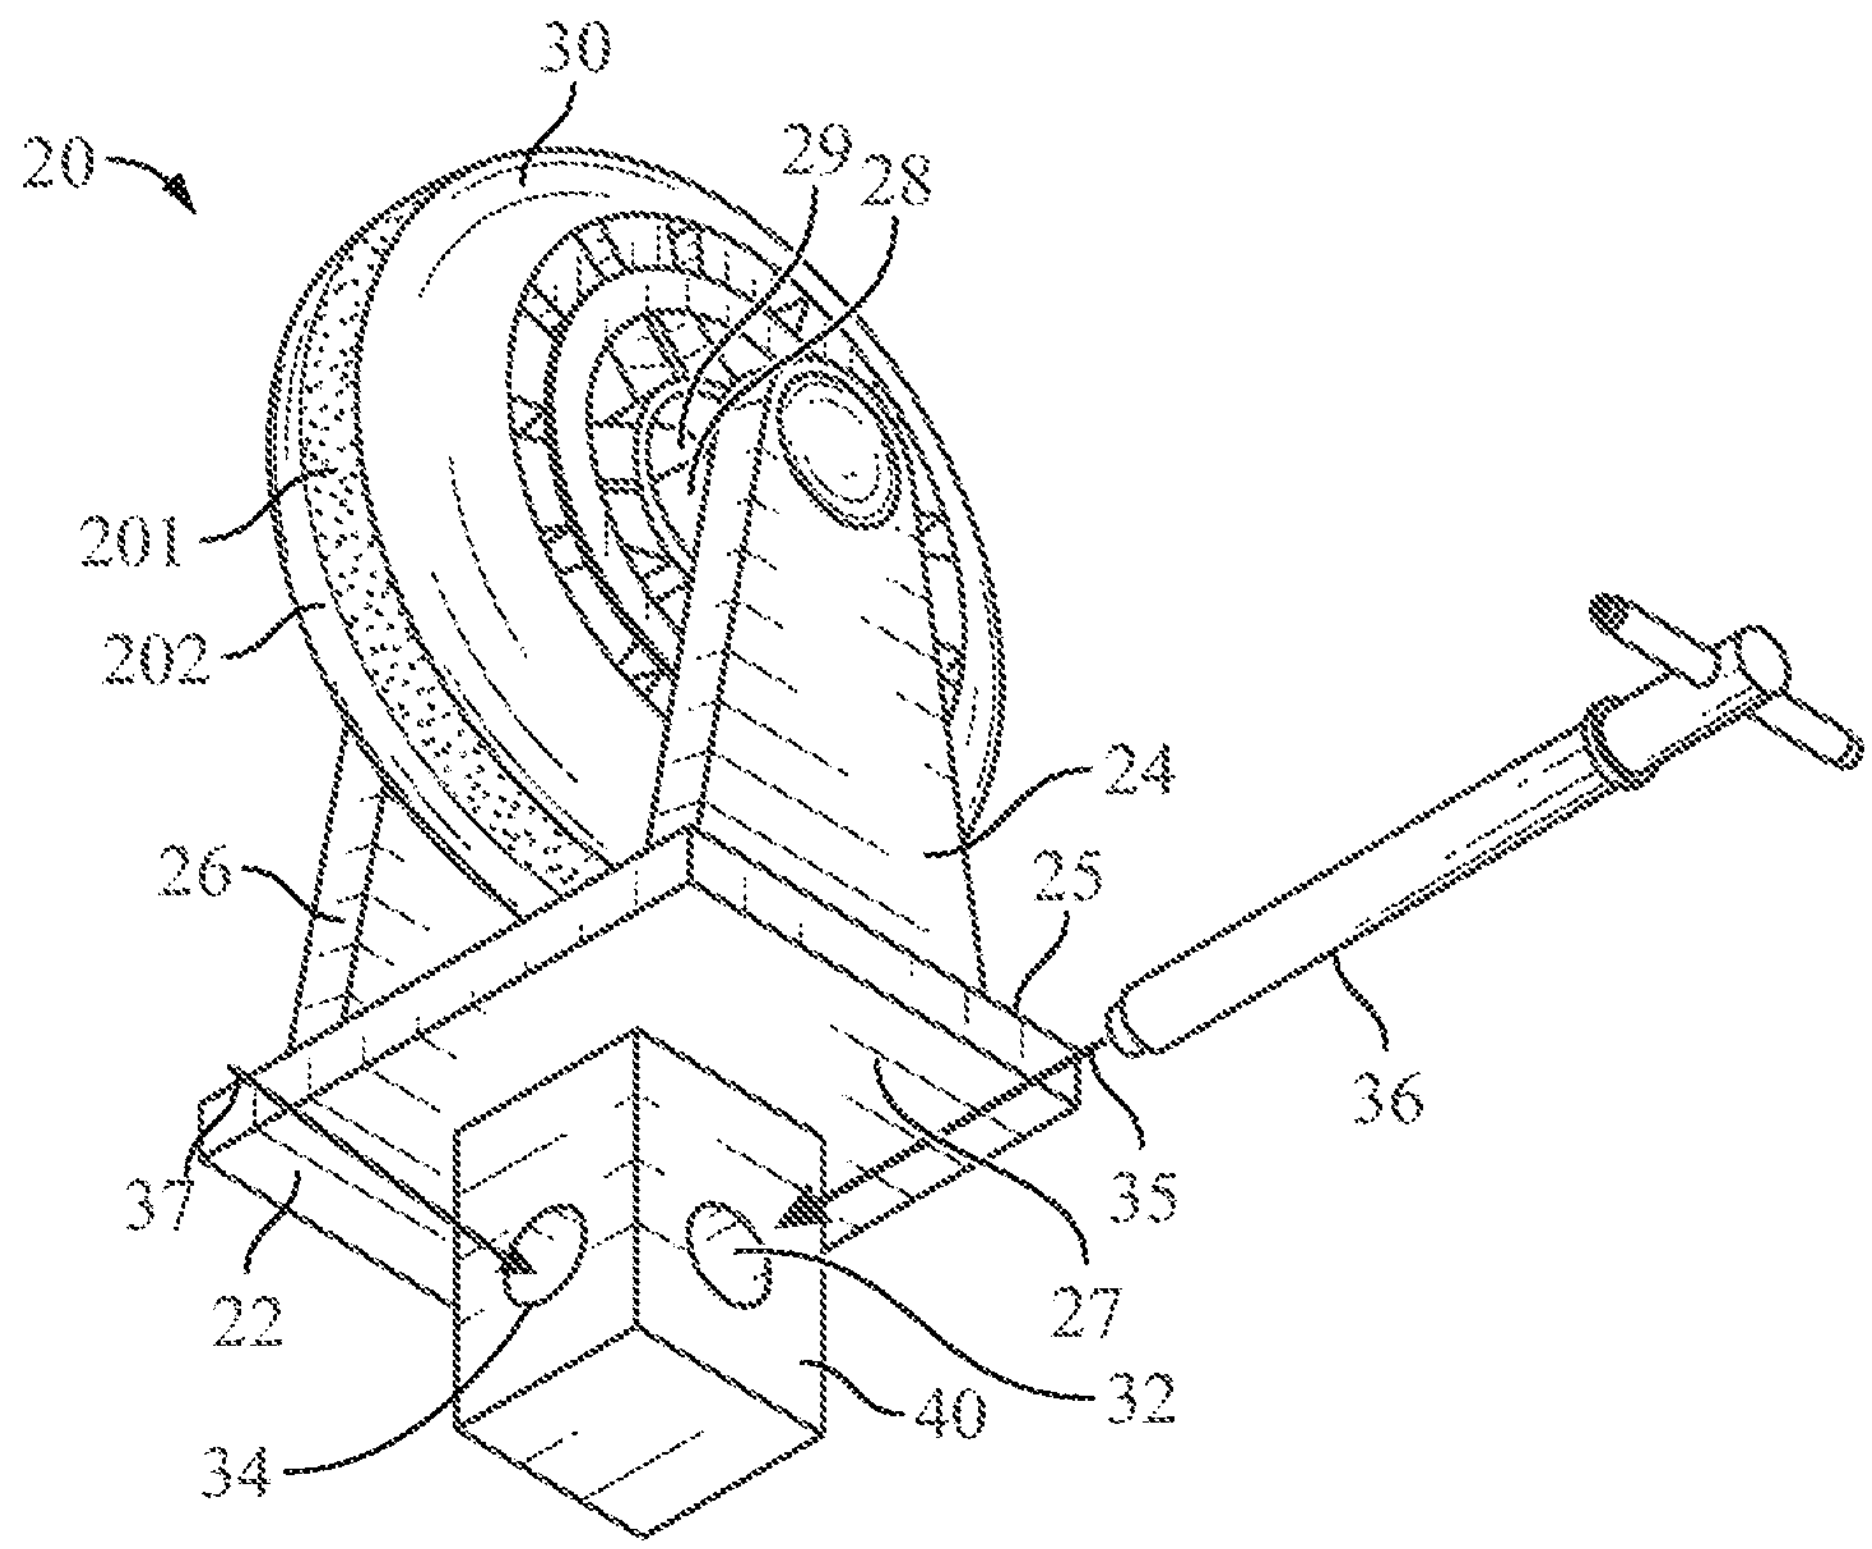

FIG. 1A

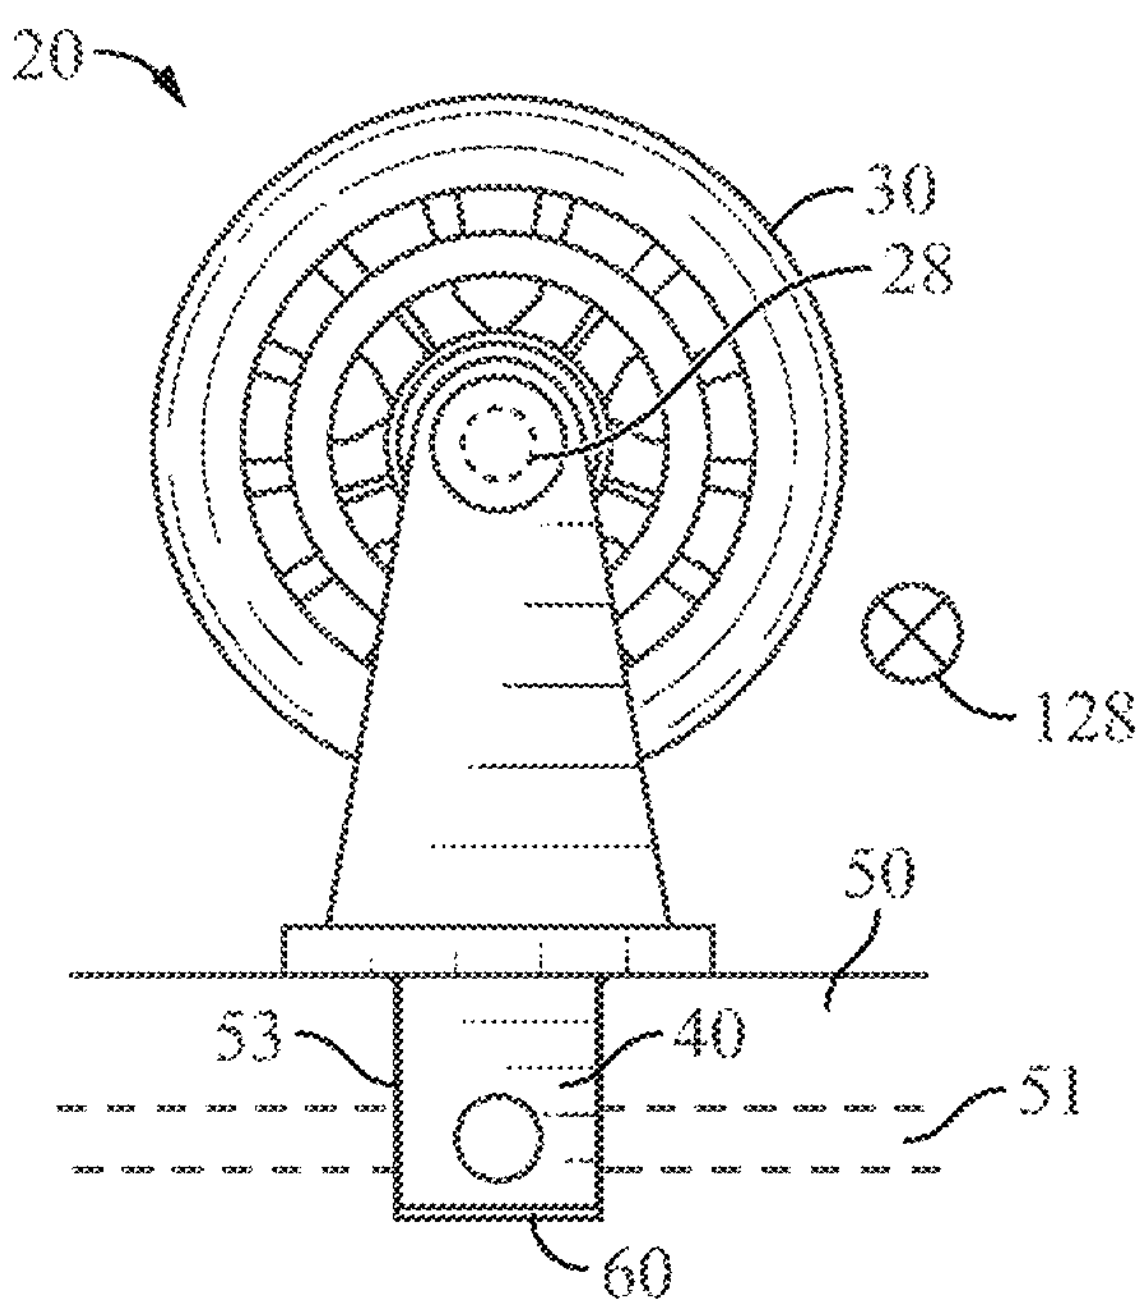

FIG. 1B

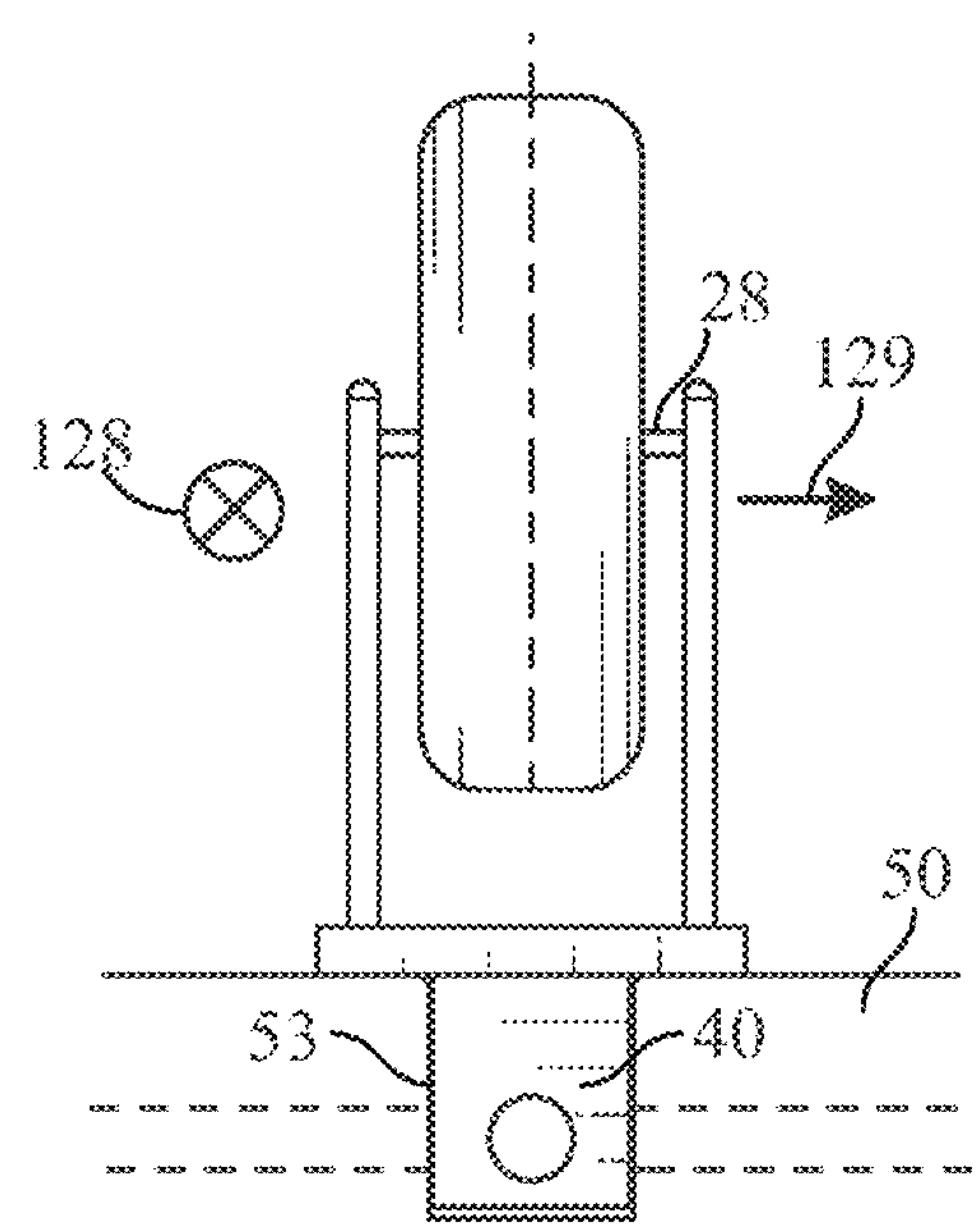

FIG. 1C

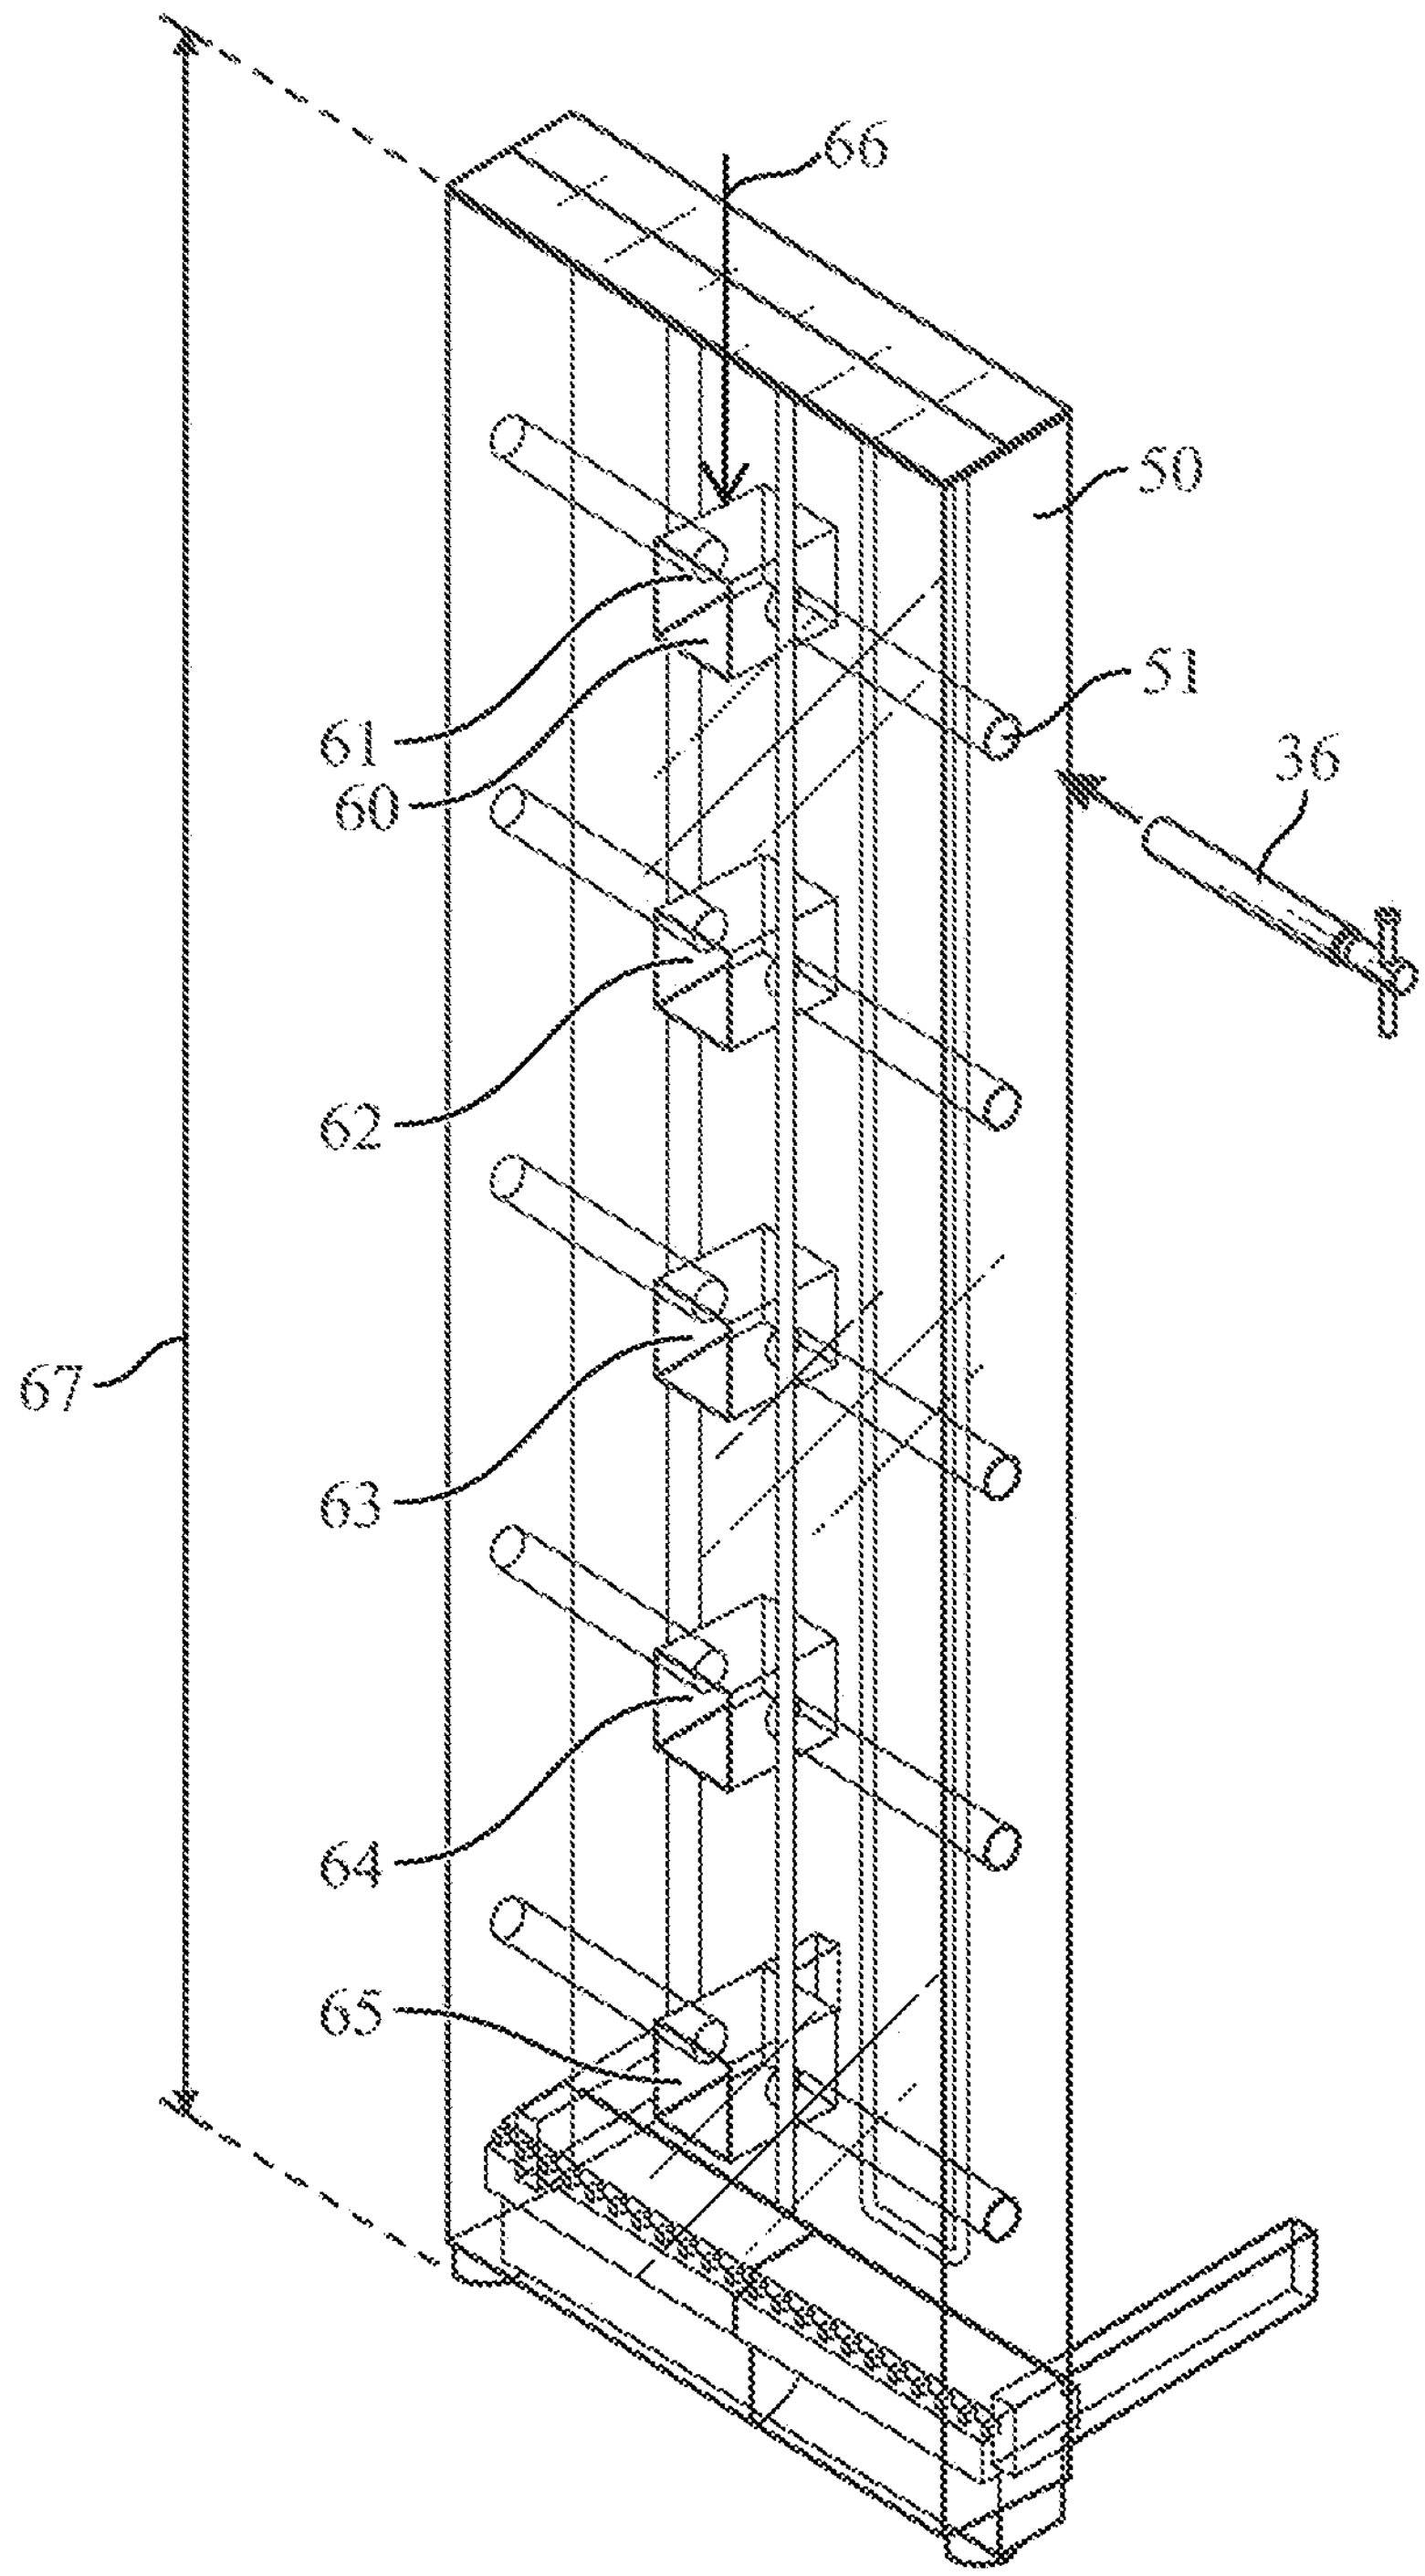

FIG. 2

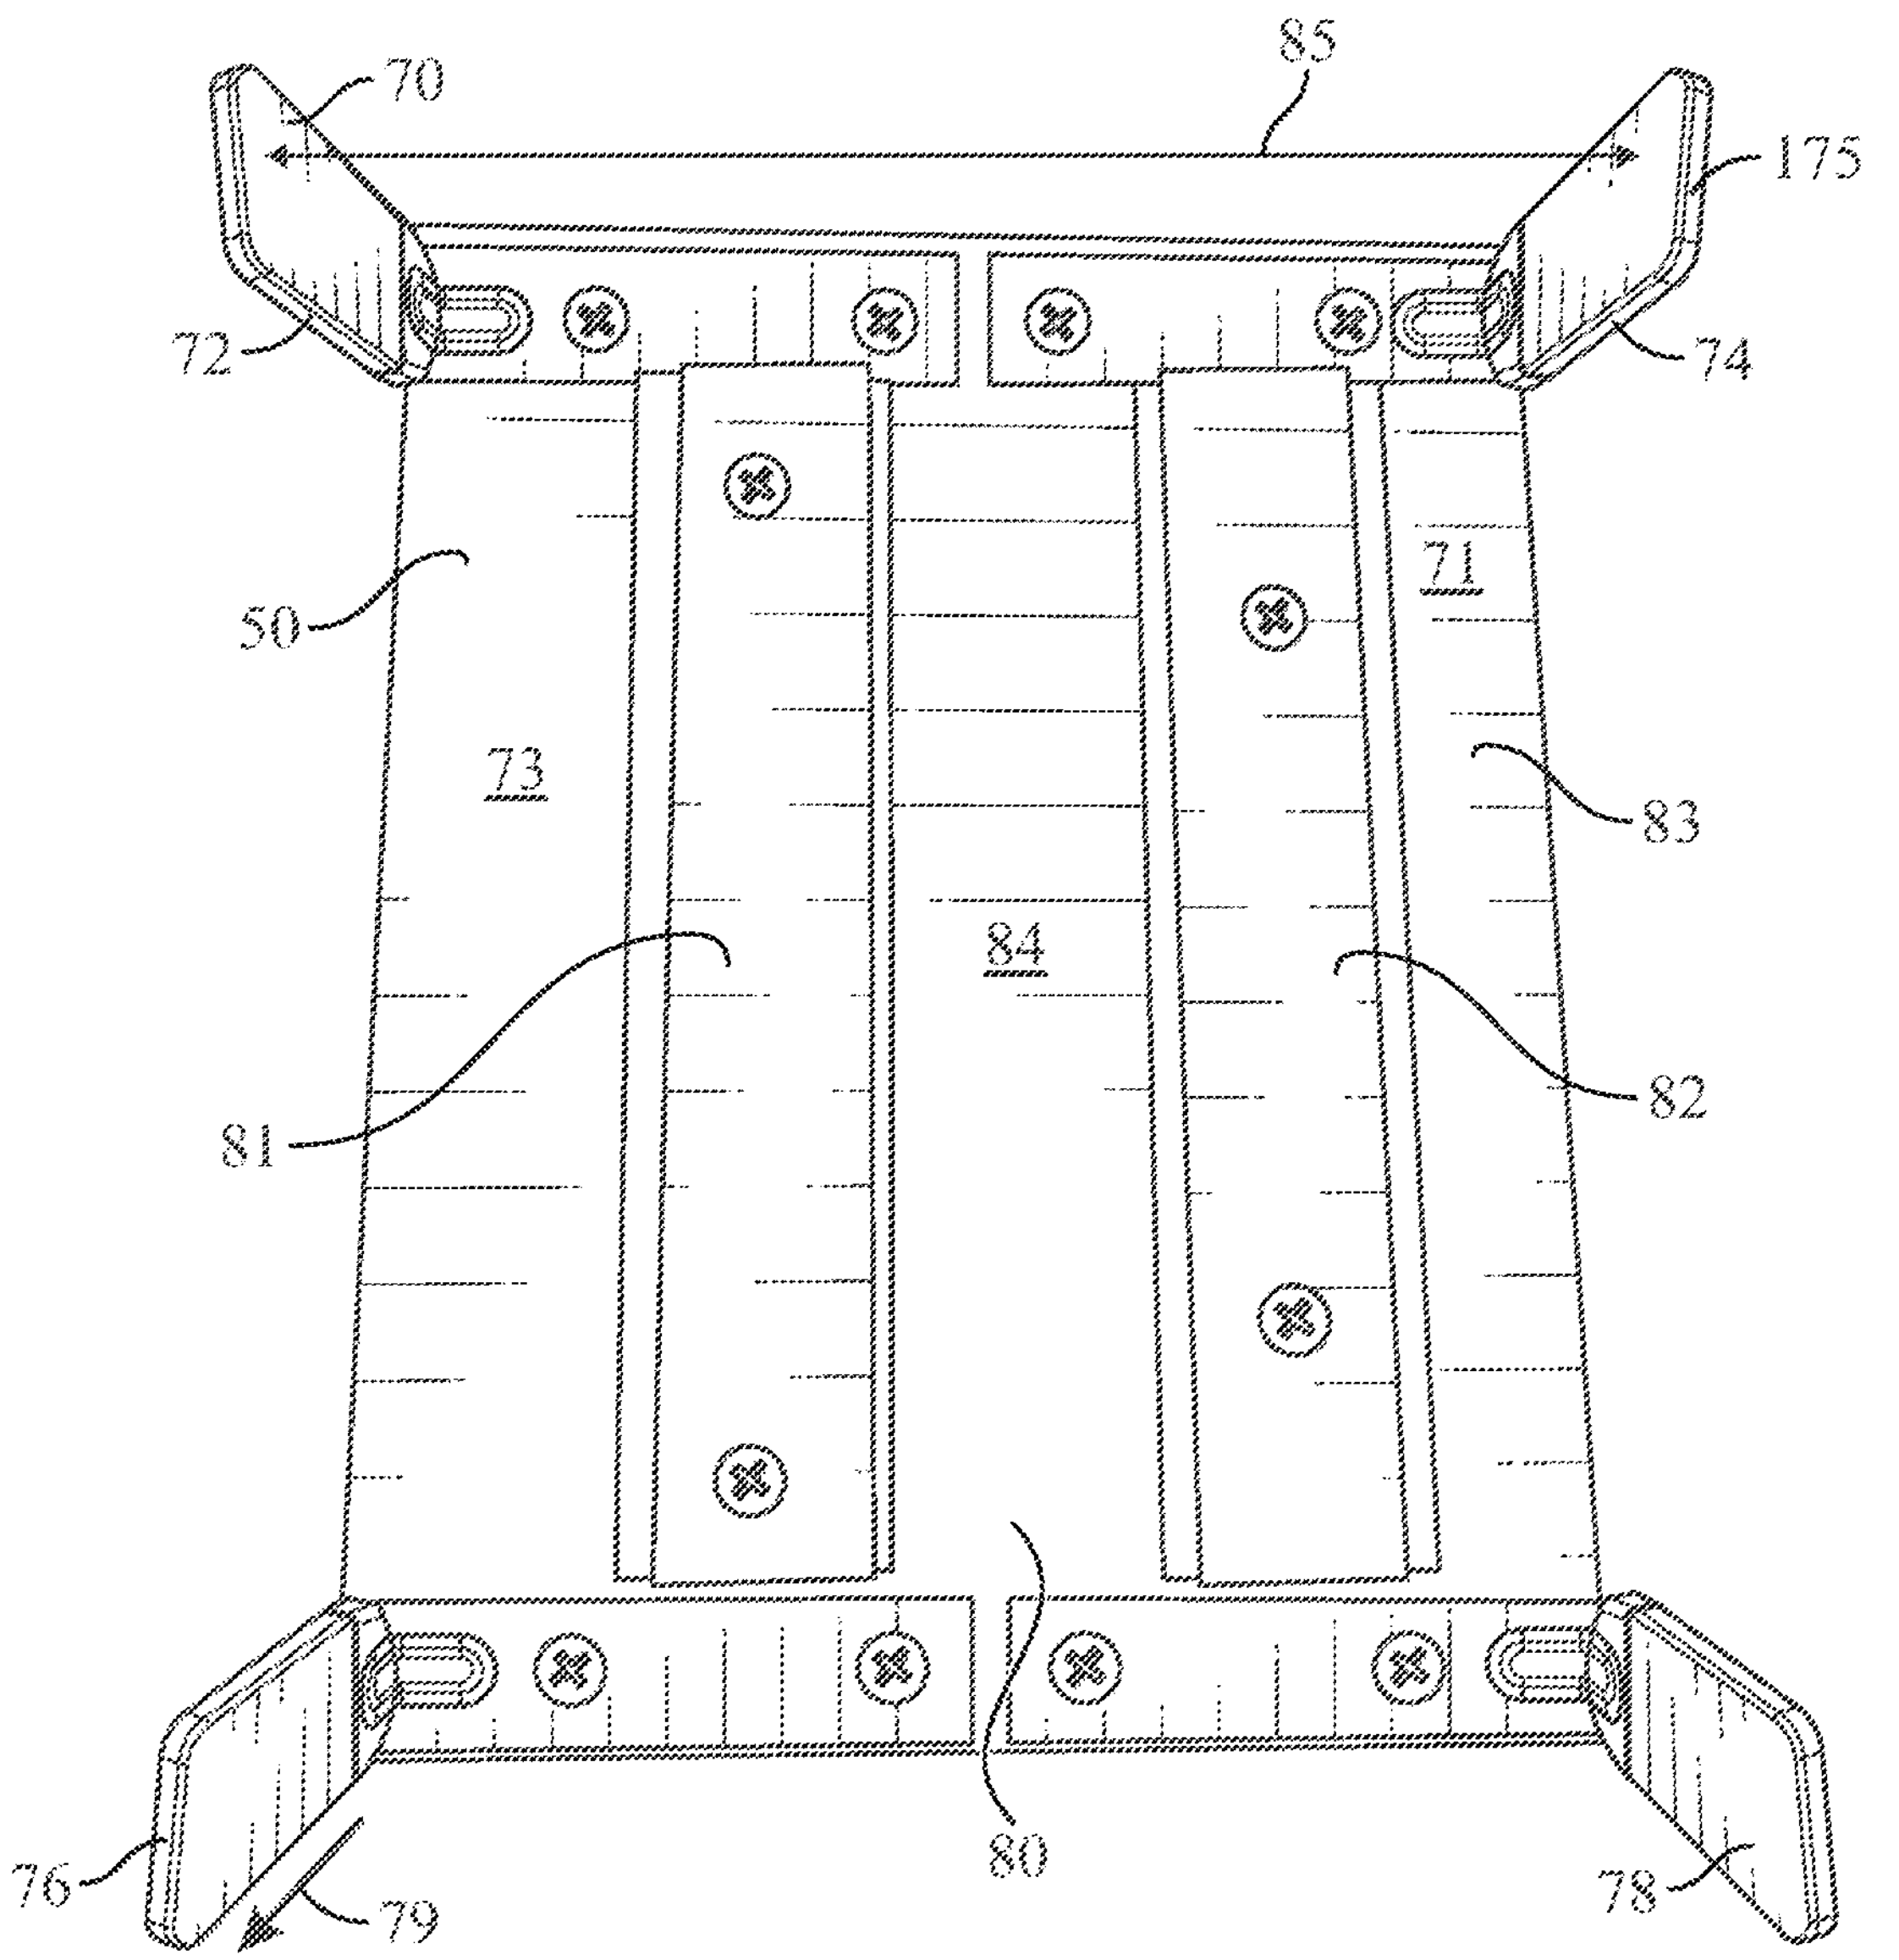

FIG. 3

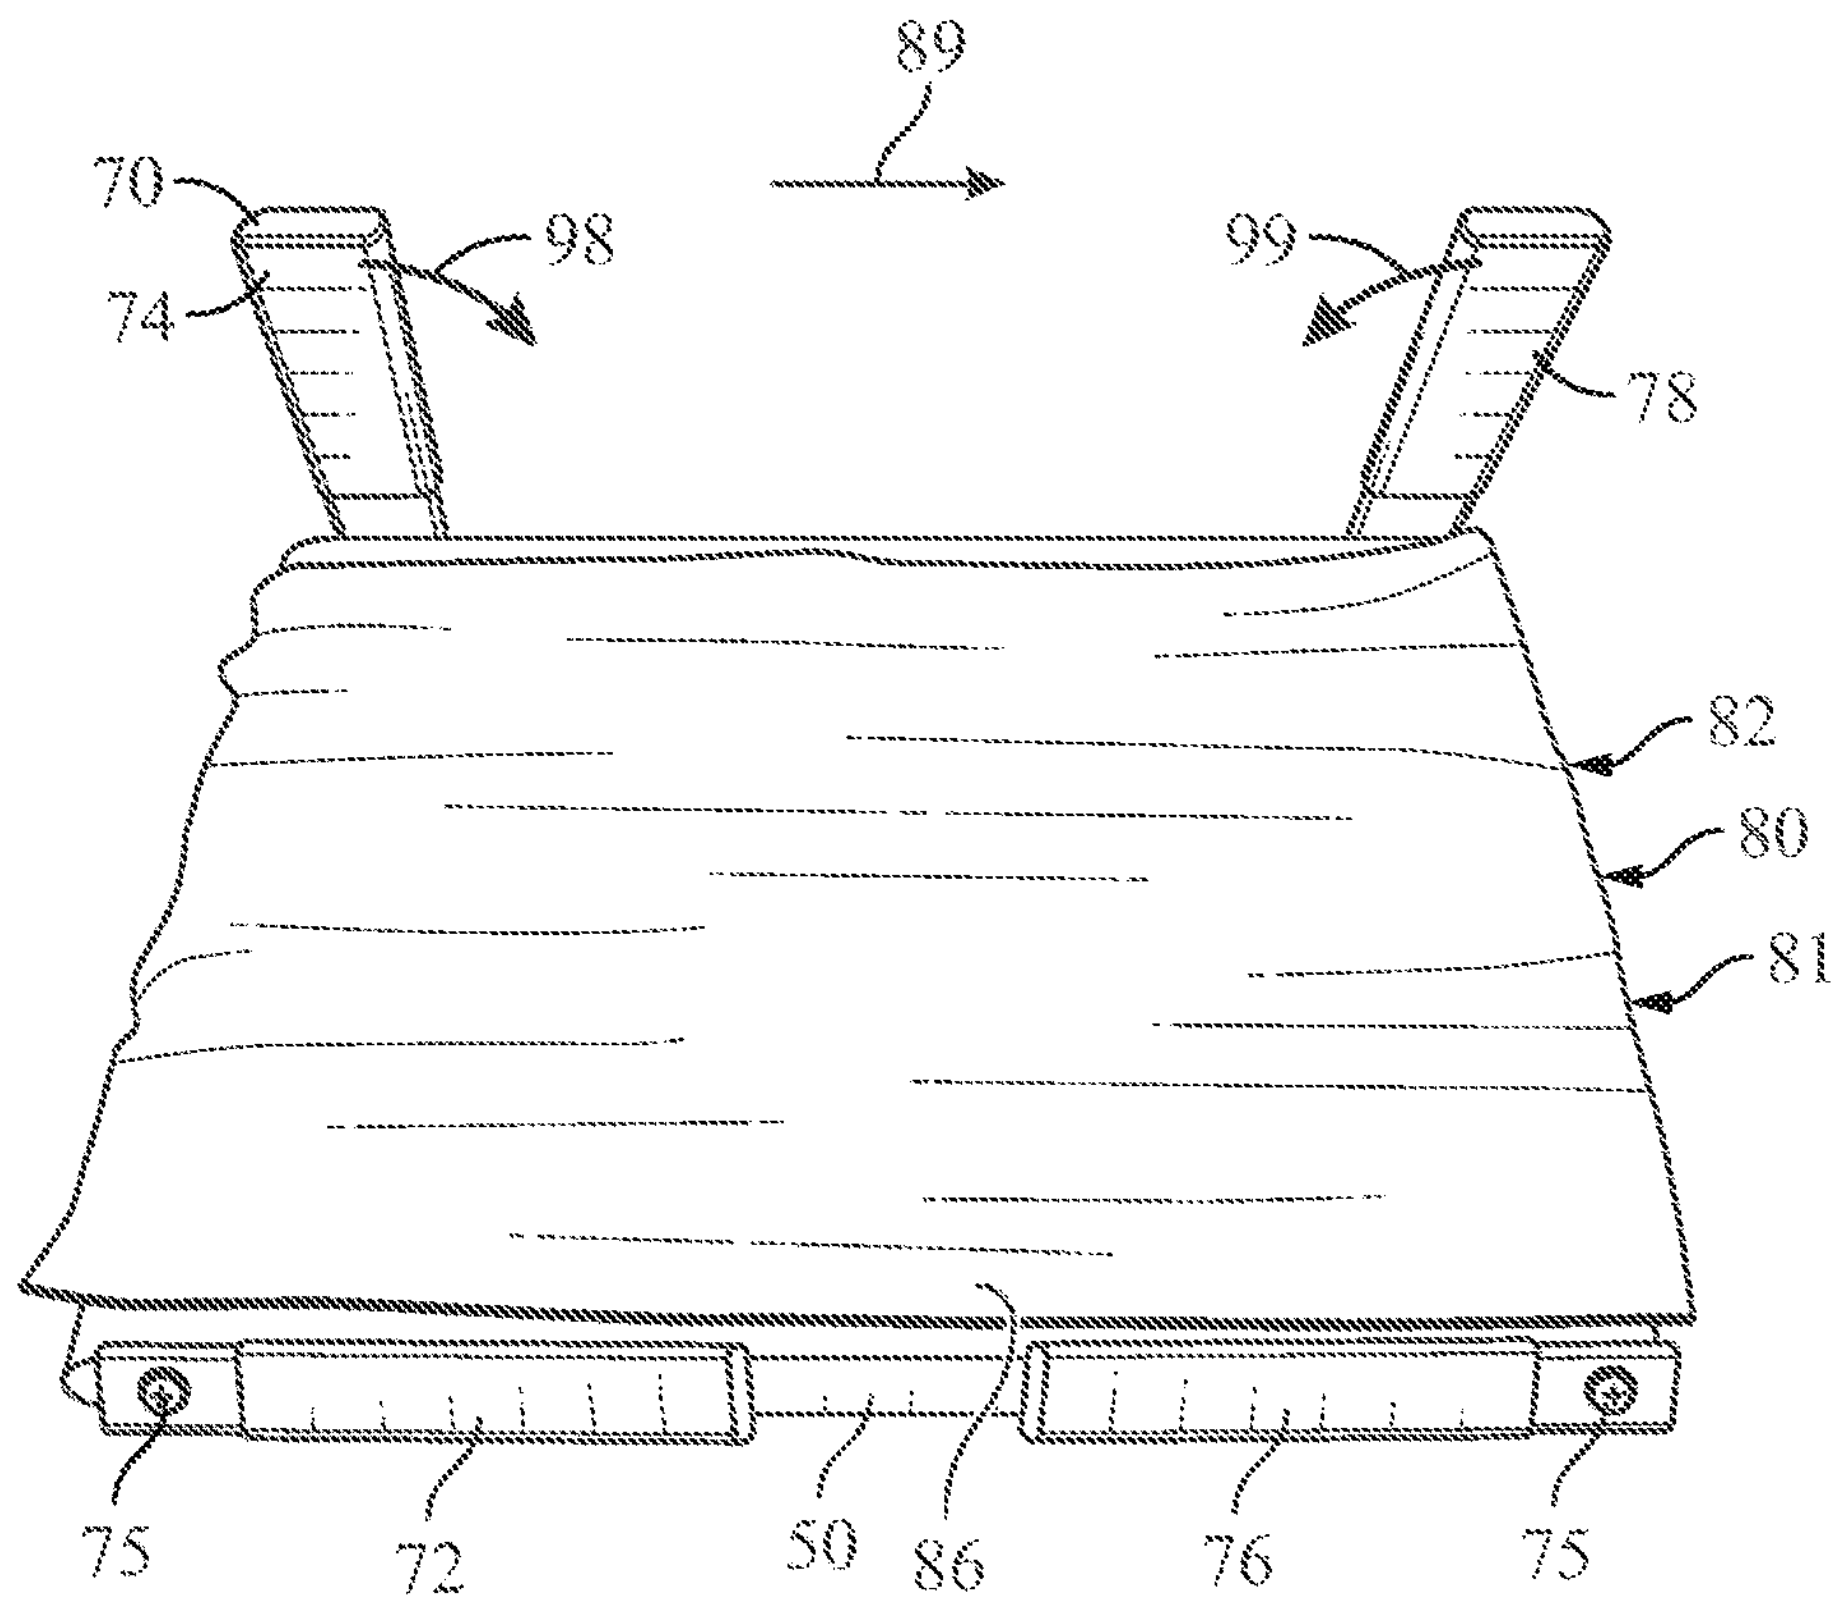

FIG. 4

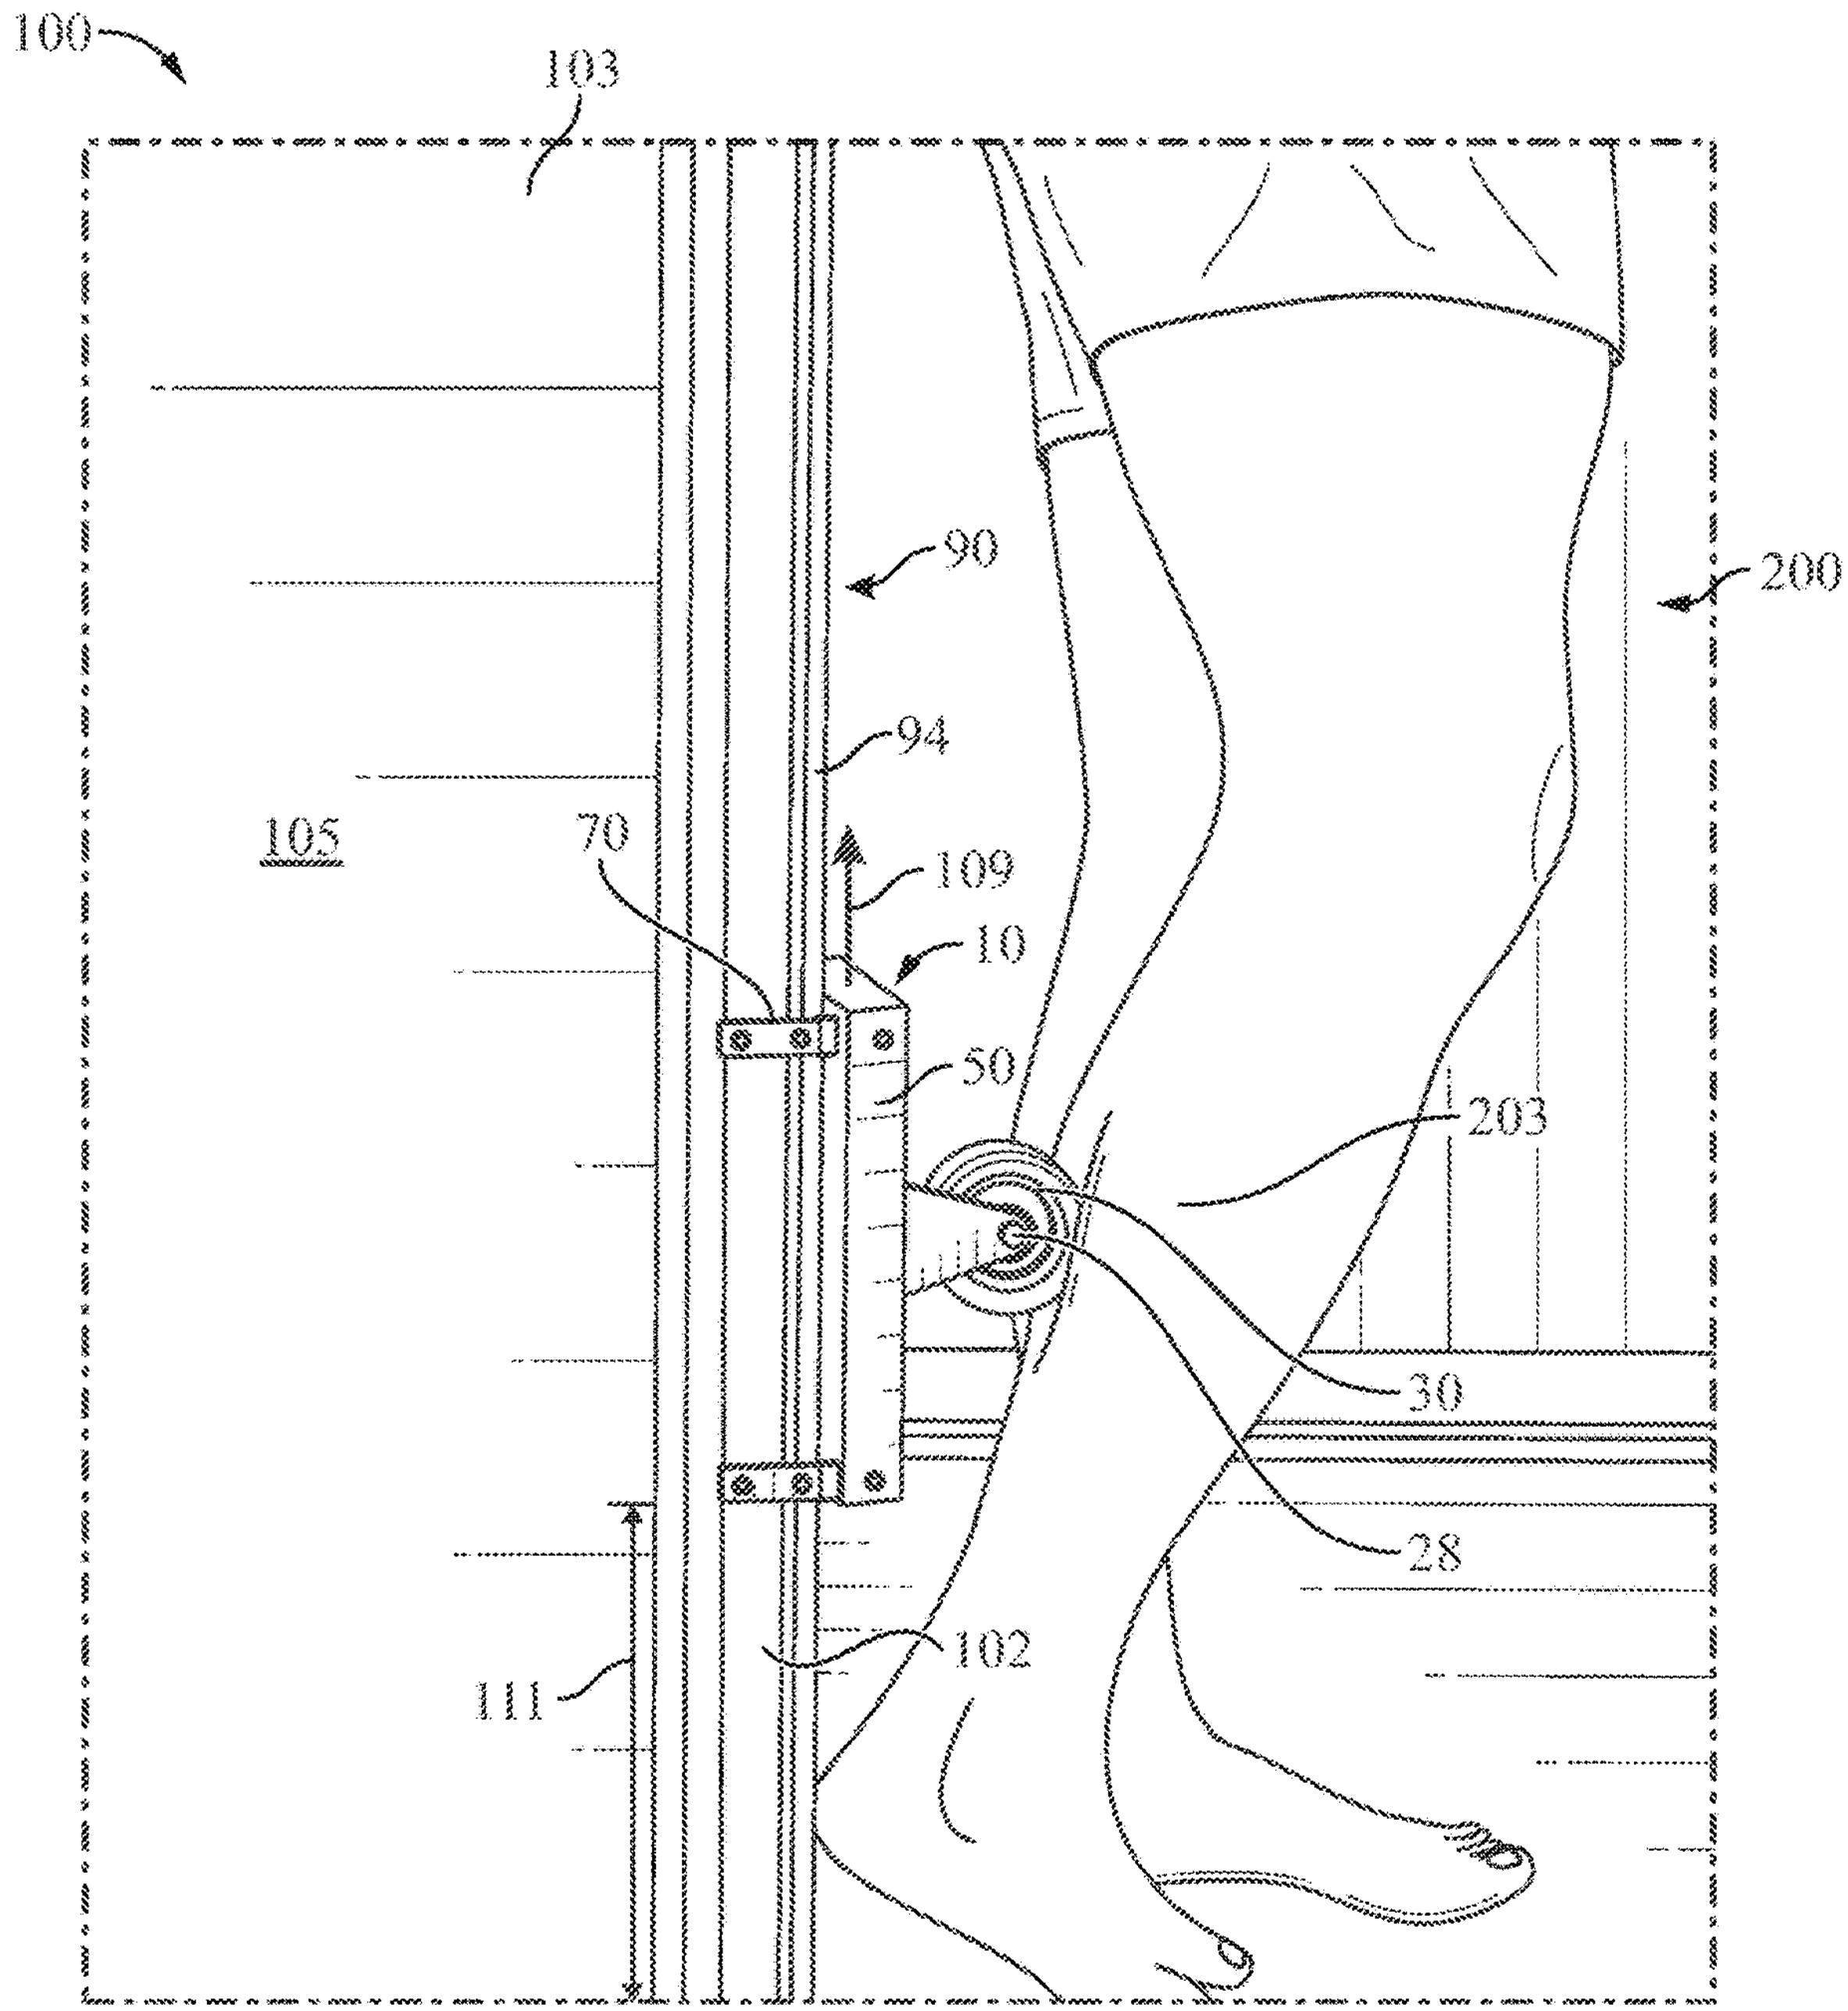

FIG. 5

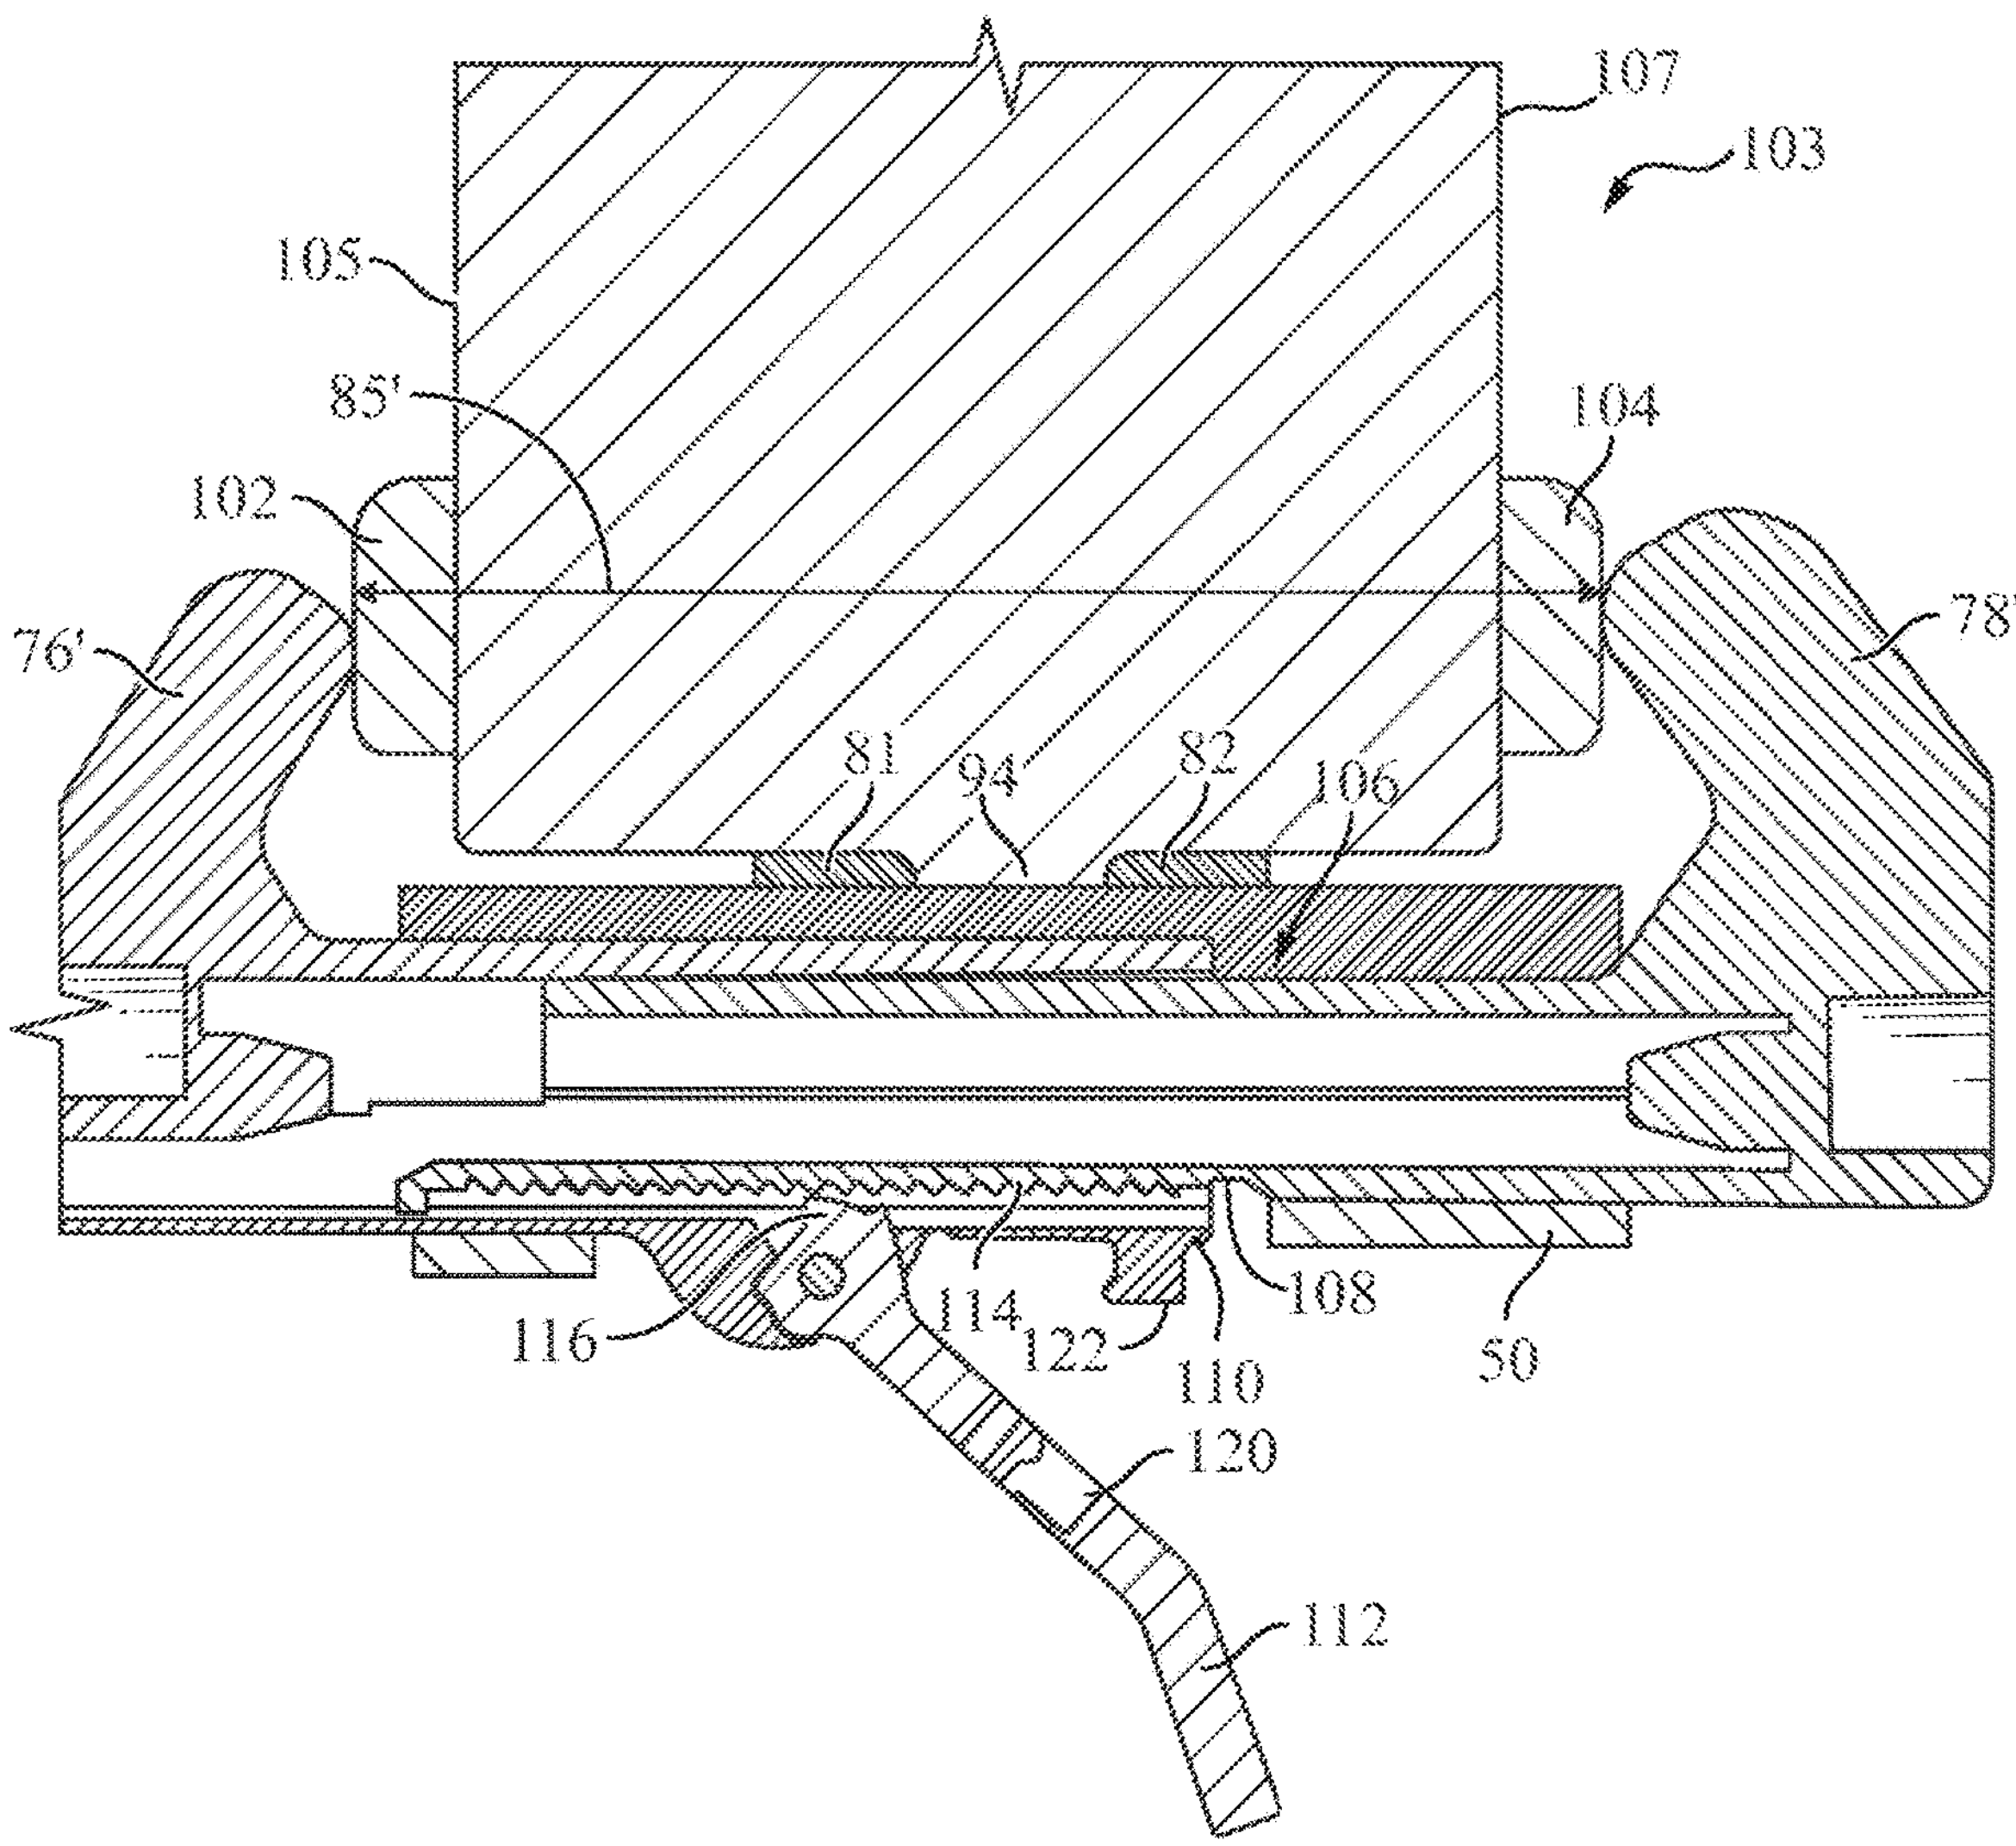
107
103
105
85'
104
102
76'
78'
81
94
82
106
116
114
122
108
110
50
120
112

FIG. 6

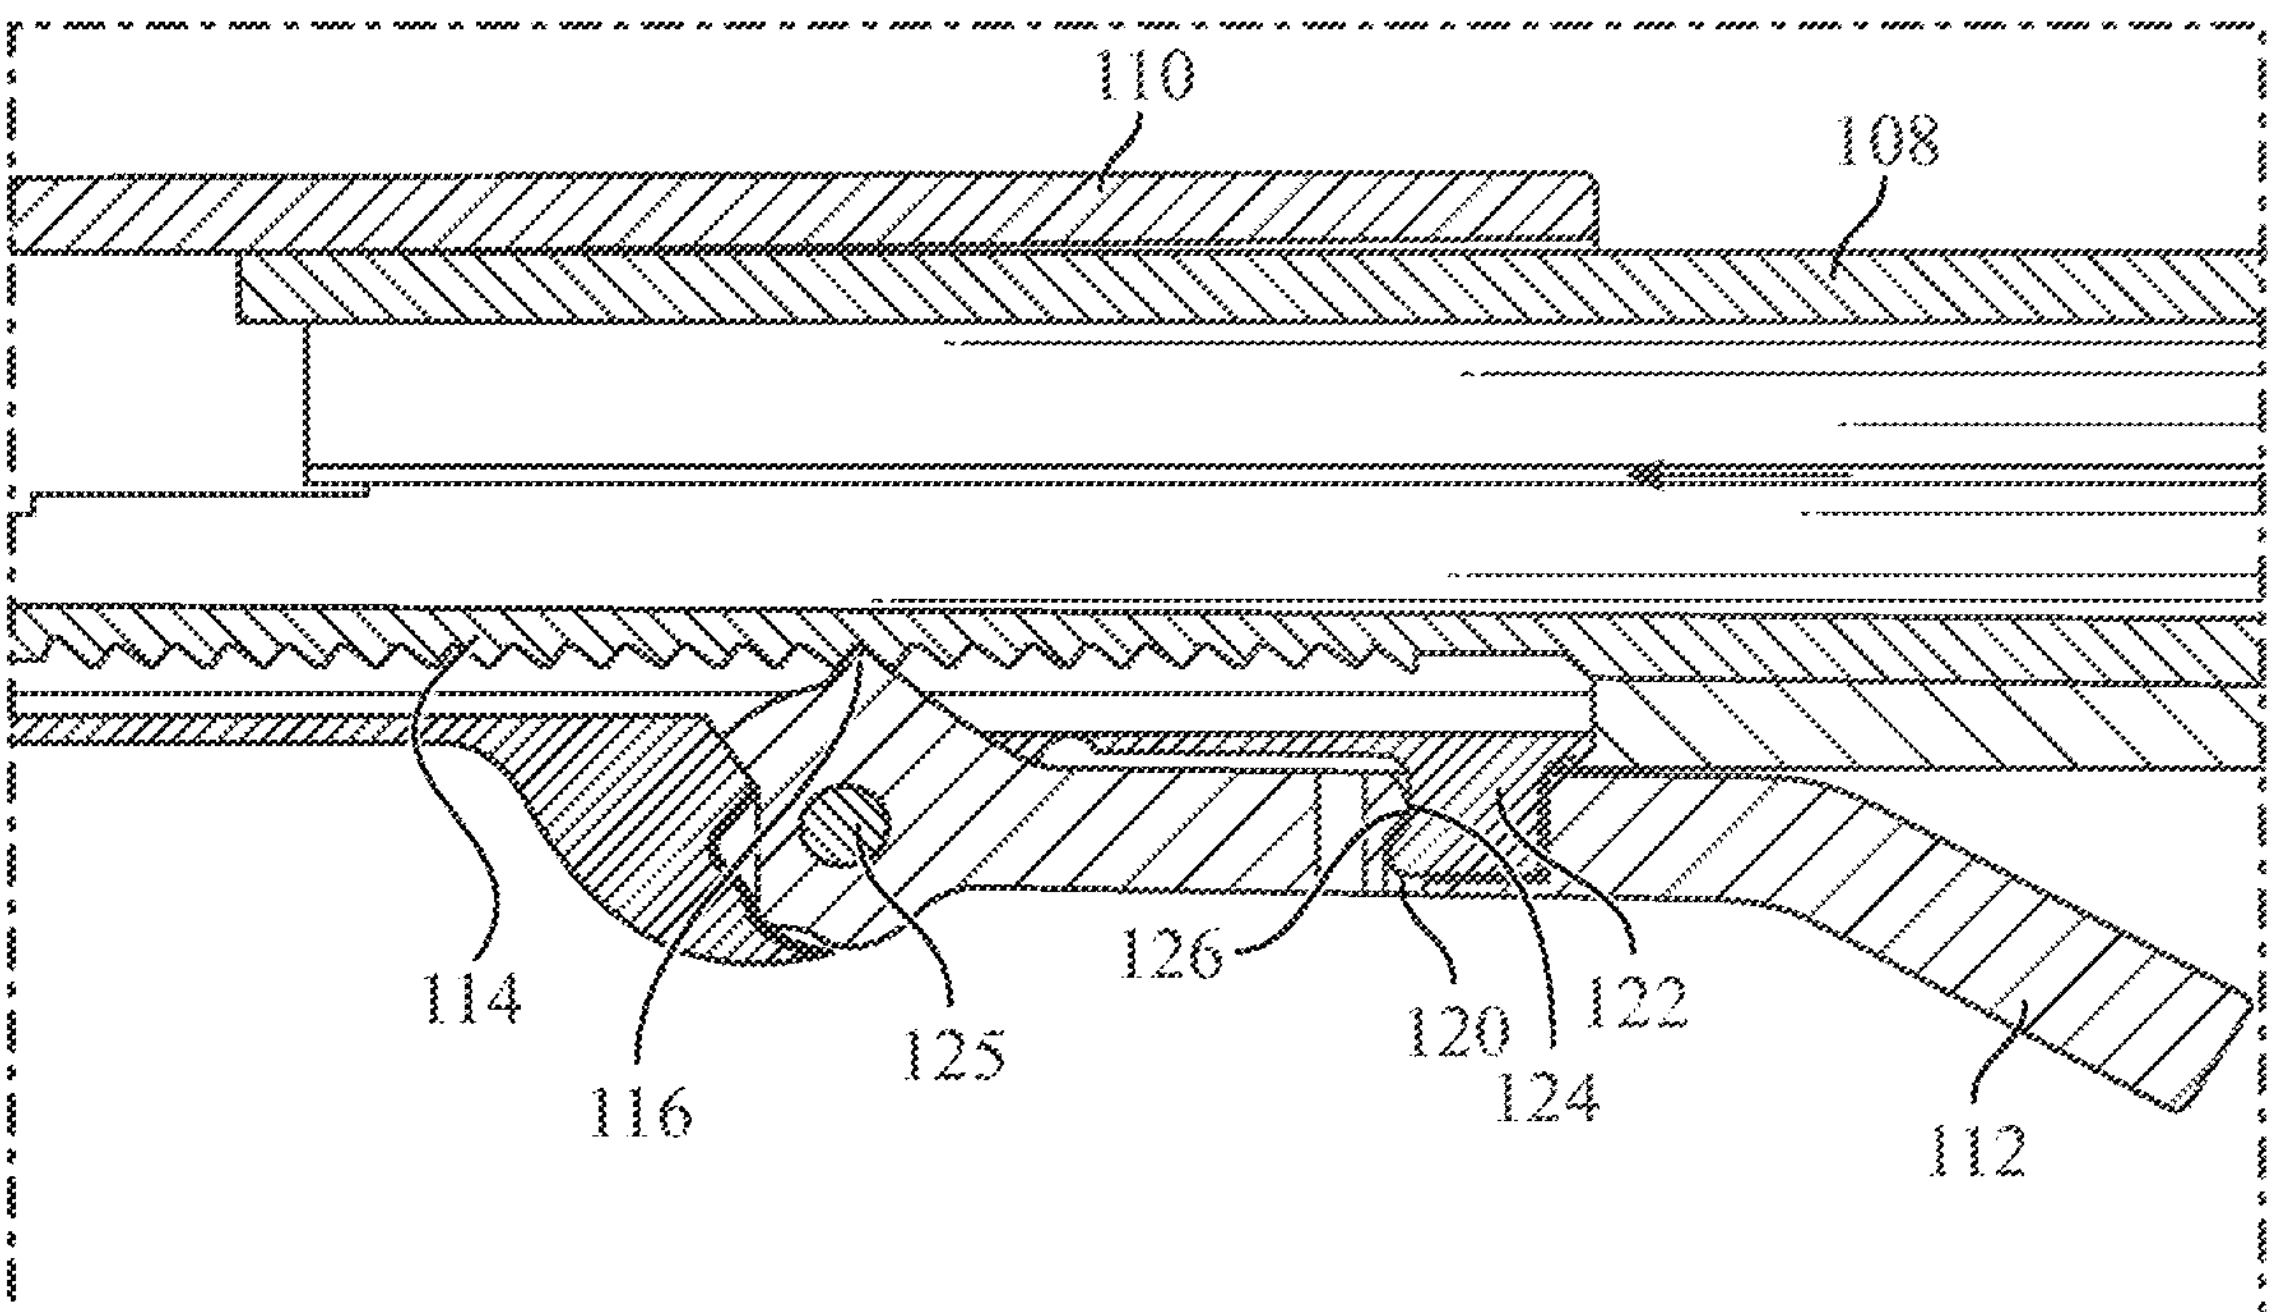

FIG. 7

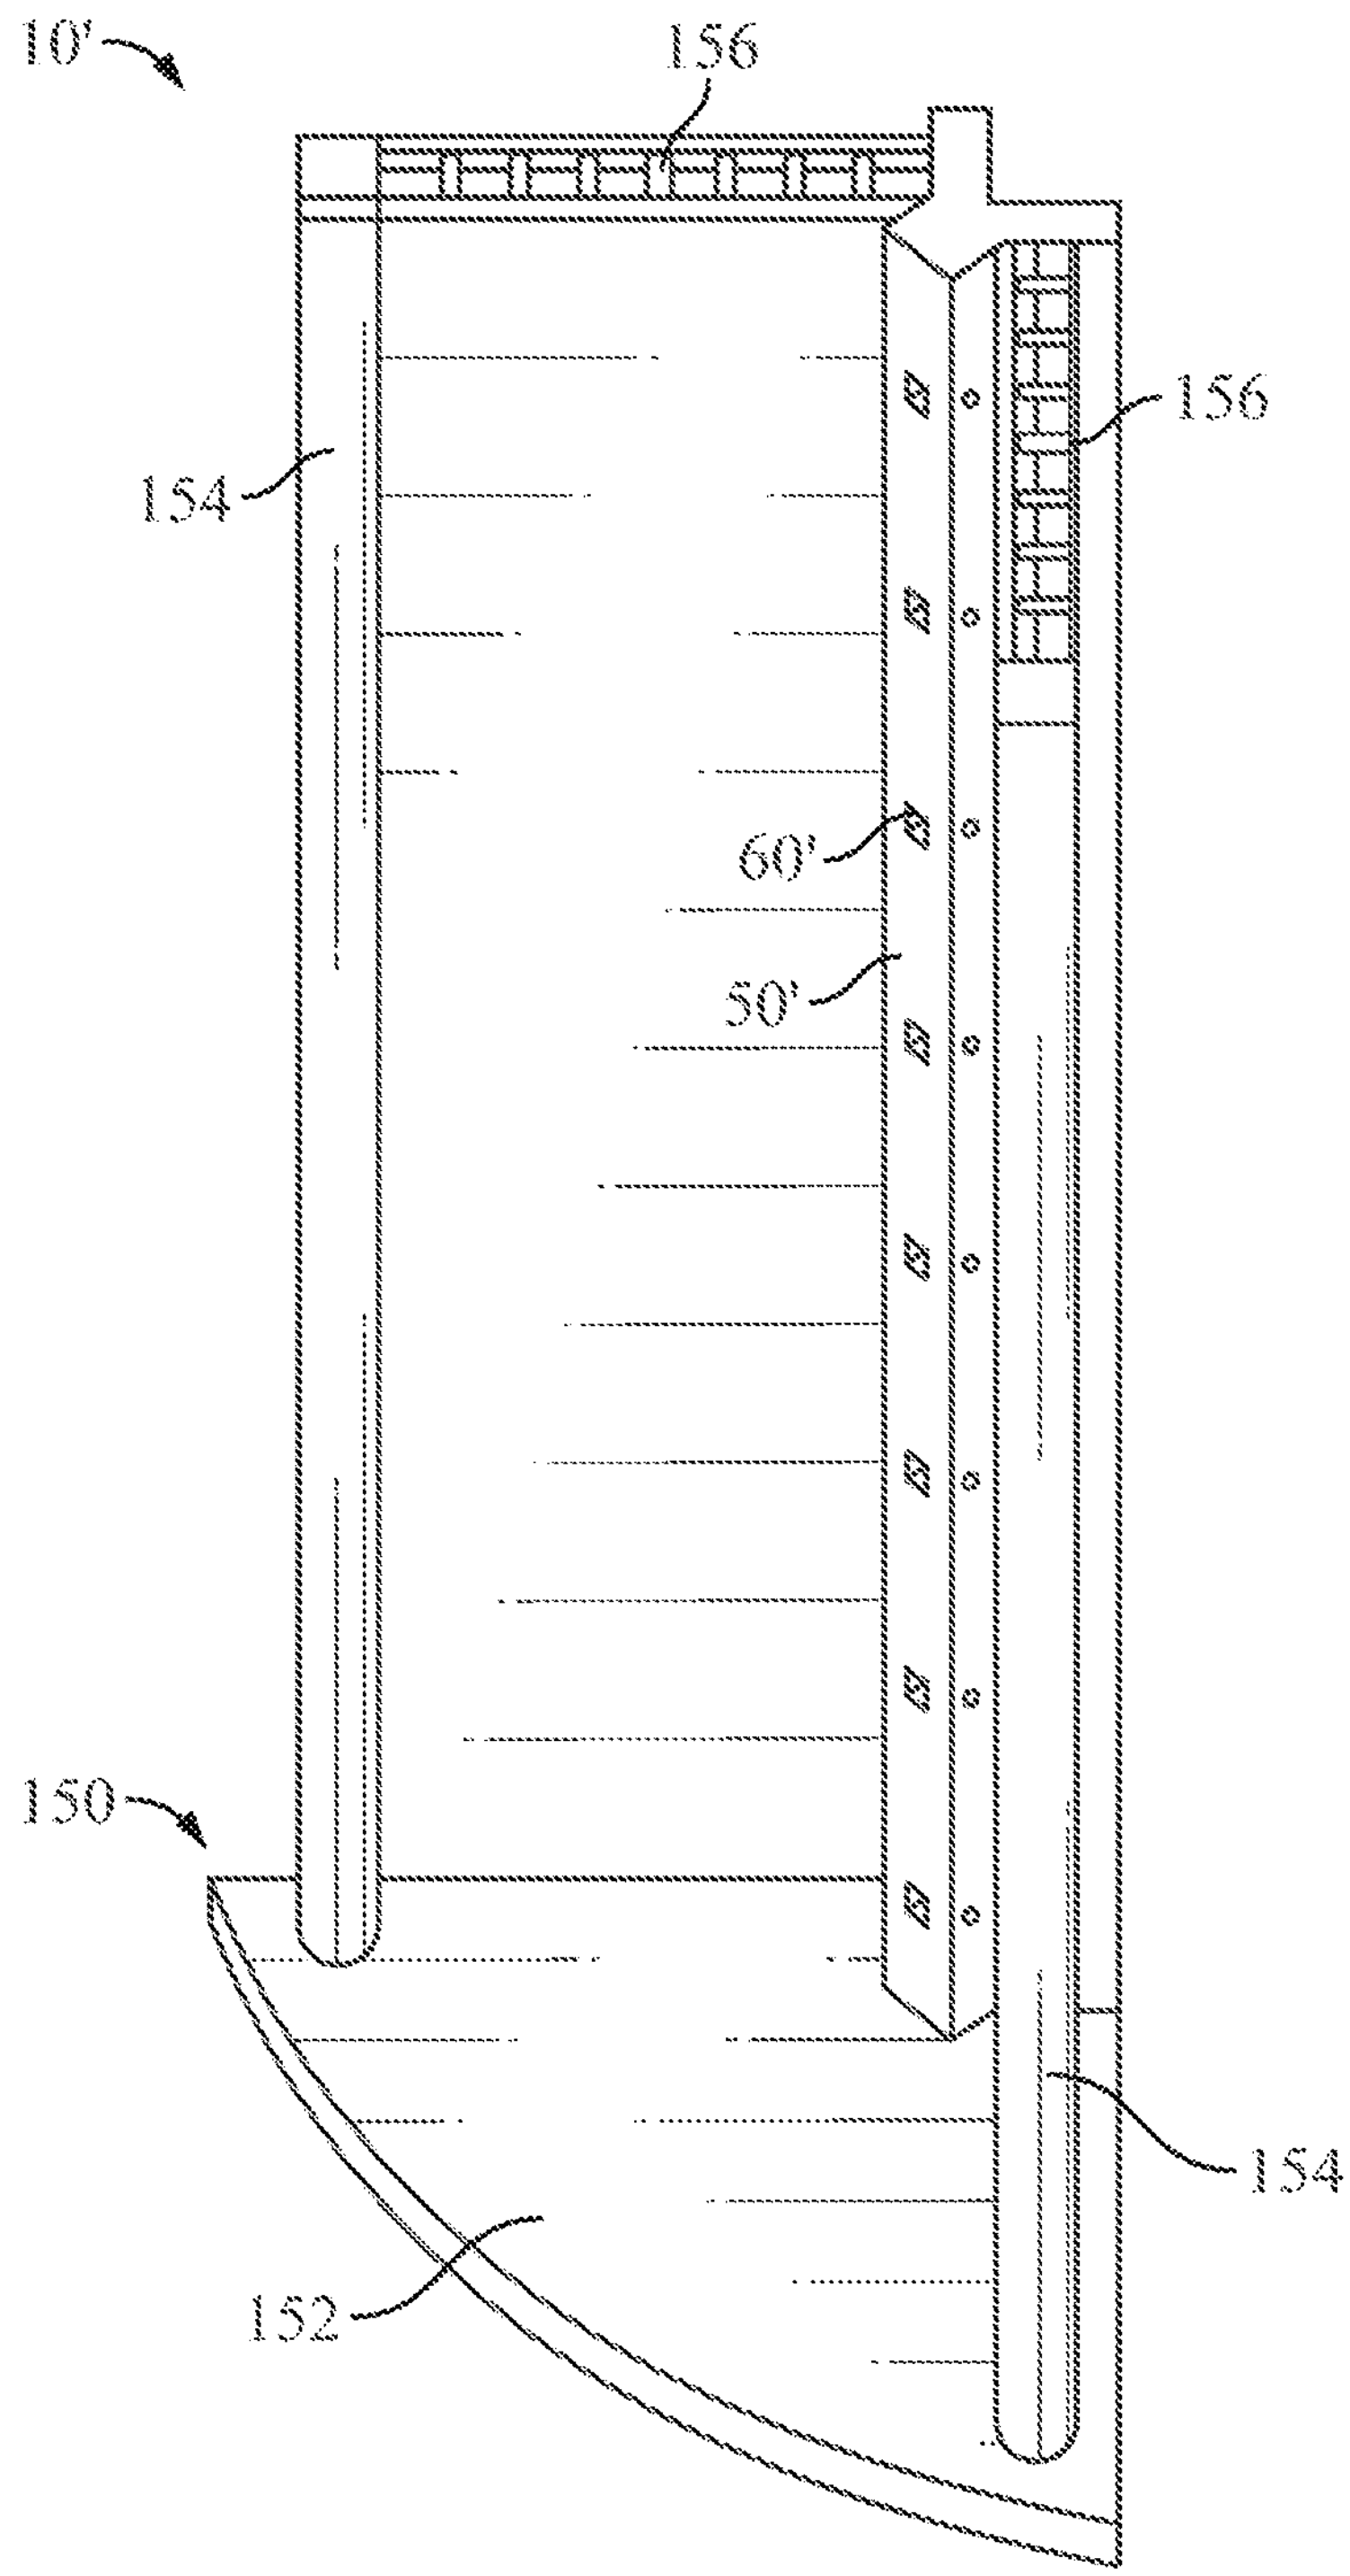

FIG. 8

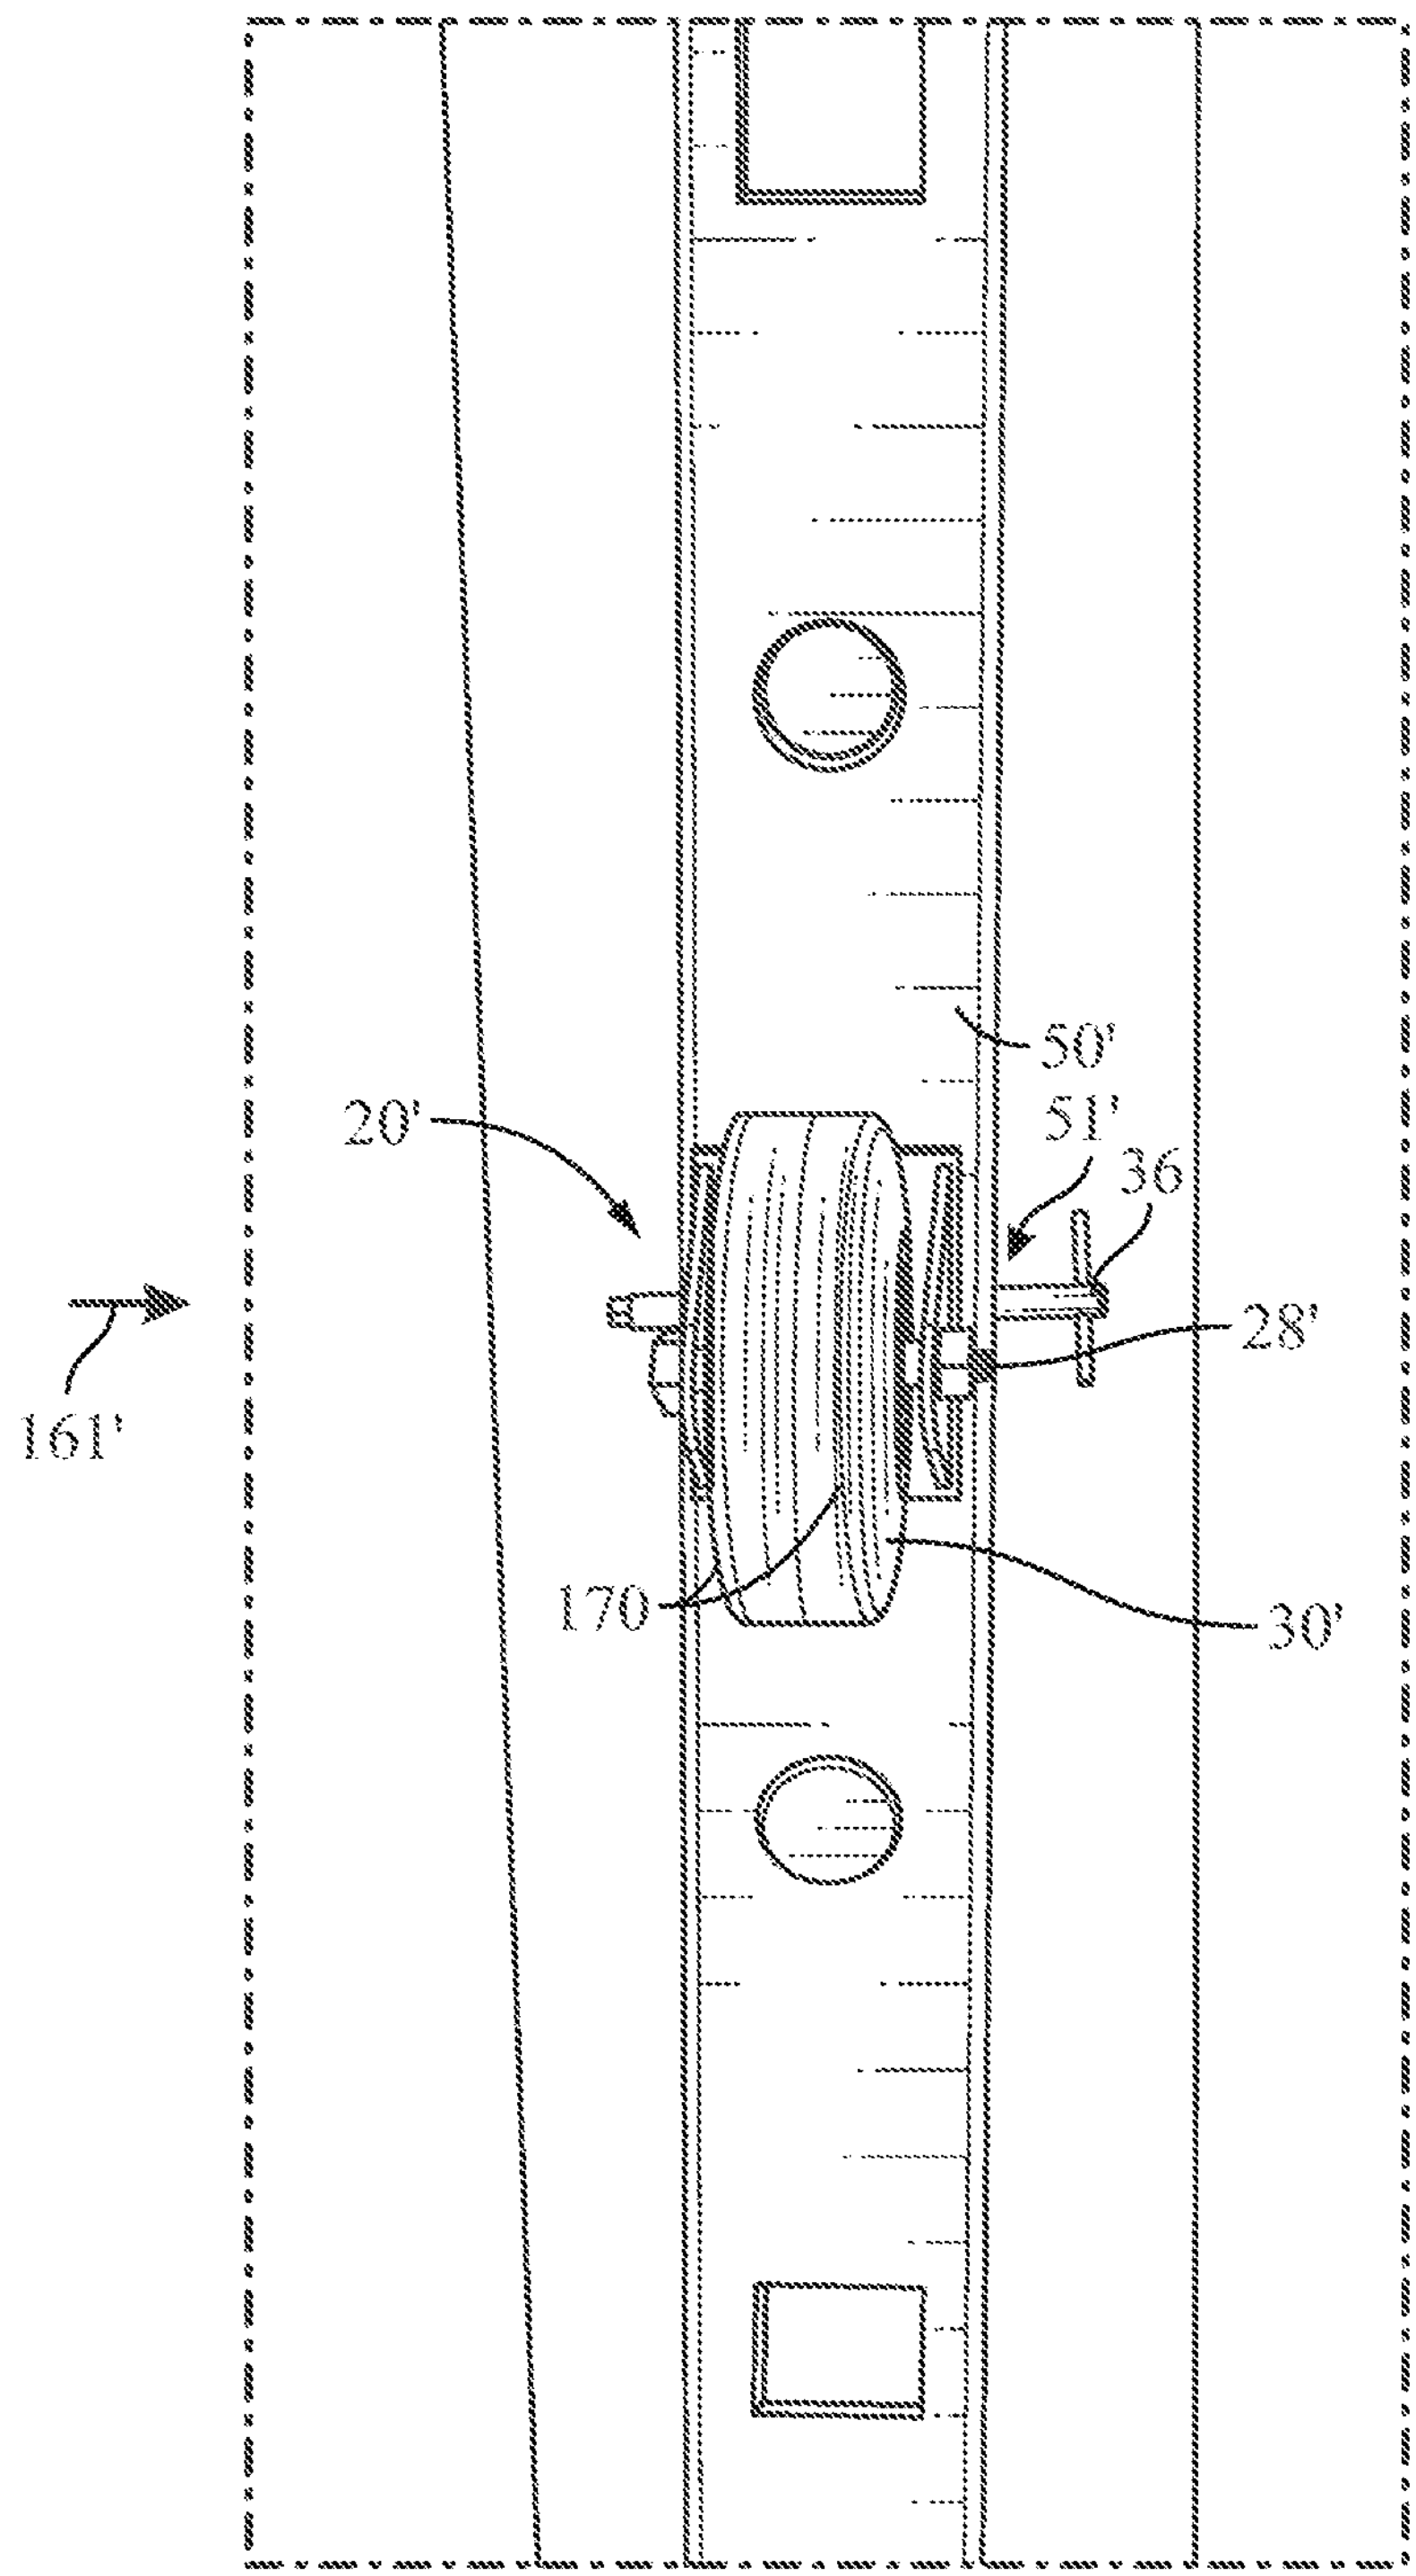

FIG. 9

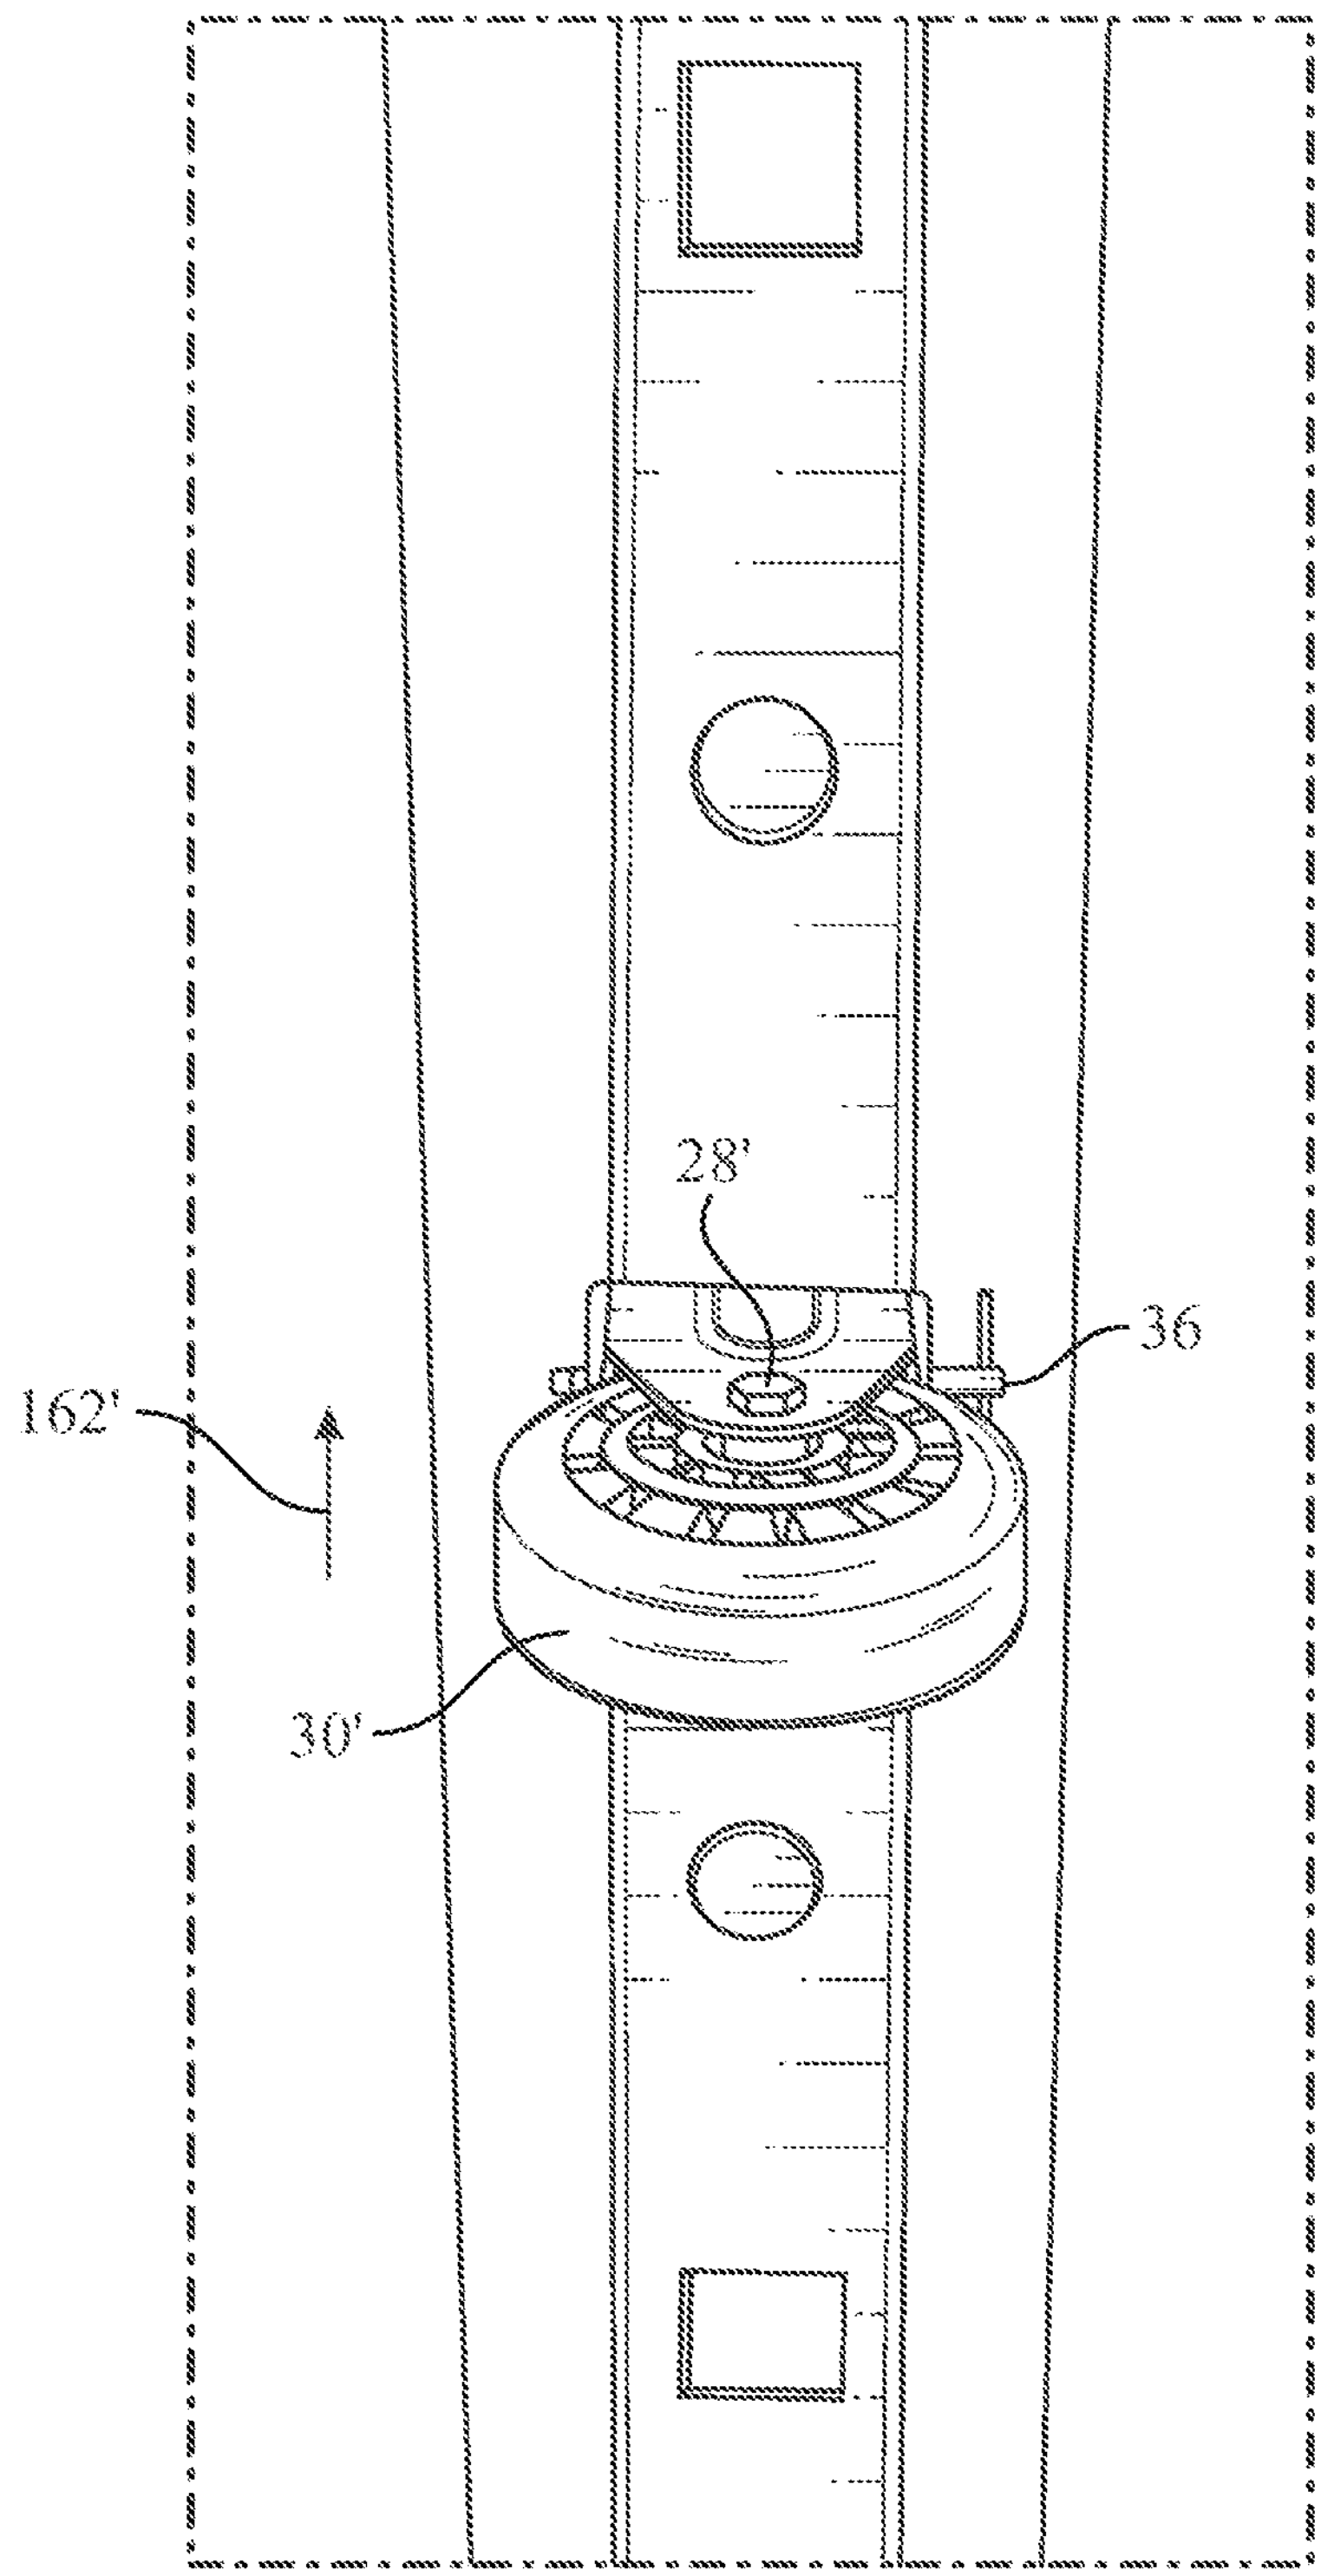

FIG. 10

MASSAGE DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

This application claims priority to and the benefit of U.S. Provisional Patent Application No. 63/426,905 filed on Nov. 21, 2022, which is hereby incorporated by reference herein.

TECHNICAL FIELD

The embodiments generally relate to the field of massage devices.

BACKGROUND

Massage devices are typically handheld devices. A user usually must hold and carry these handheld massage devices throughout the entire duration of a massage, whether the user massages themselves, or the user massages another user.

There is a need for a massage device that does not have to be held or carried by a user during a massage.

SUMMARY

This summary is provided to introduce a variety of concepts in a simplified form that is further disclosed in the detailed description of the embodiments. This summary is not intended to identify key or essential inventive concepts of the claimed subject matter, nor is it intended for determining the scope of the claimed subject matter.

In general, a massage device can include a first wheel assembly, comprising: a first base; a first wheel supported at a predetermined distance from a first side of the first base; at least one first stem attached to a second side of the first base; the massage device further comprising: a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem, and wherein the body is constructed and arranged to prevent the at least one first stem from rotating within the at least one socket; and two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building.

Other illustrative variations within the scope of the invention will become apparent from the detailed description provided hereinafter. The detailed description and enumerated variations, while disclosing optional variations, are intended for purposes of illustration only and are not intended to limit the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the embodiments, and the attendant advantages and features thereof, will be more readily understood by references to the following detailed description when considered in conjunction with the accompanying drawings wherein:

FIGS. **1**A-**1**C illustrate illustrative depictions of a wheel assembly of a massage device, according to some embodiments disclosed herein;

FIG. **2** illustrates an illustrative depiction of a body of a massage device, according to some embodiments disclosed herein;

FIG. **3** illustrates an illustrative depiction of a body of a massage device with arms extended, according to some embodiments disclosed herein;

FIG. **4** illustrates an illustrative depiction of a body of a massage device with a liner, according to some embodiments disclosed herein;

FIG. **5** illustrates an illustrative depiction of a massage device mounted onto a wall, according to some embodiments disclosed herein;

FIG. **6** illustrates an illustrative depiction of a massage device having a telescopic shaft between at least two arms, with a lever in an open position, according to some embodiments disclosed herein;

FIG. **7** illustrates an illustrative depiction of a massage device having a telescopic shaft between at least two arms, with a lever in a closed position, according to some embodiments disclosed herein;

FIG. **8** illustrates an illustrative depiction of a massage device having a stand, according to some embodiments disclosed herein;

FIG. **9** illustrates an illustrative depiction of a massage device having an axle parallel to a first direction, according to some embodiments disclosed herein; and

FIG. **10** illustrates an illustrative depiction of a massage device having an axle parallel to a second direction, according to some embodiments disclosed herein.

The drawings are not necessarily to scale, and certain features and certain views of the drawings may be shown exaggerated in scale or in schematic in the interest of clarity and conciseness.

DETAILED DESCRIPTION

The specific details of the single embodiment or variety of embodiments described herein are to the described product or methods of use. Any specific details of the embodiments are used for demonstration purposes only and no unnecessary limitations or inferences are to be understood from there.

It is noted that the embodiments reside primarily in combinations of components and procedures related to the products. Accordingly, the product and components have been represented where appropriate by conventional symbols in the drawings, showing only those specific details that are pertinent to understanding the embodiments of the present disclosure so as not to obscure the disclosure with details that will be readily apparent to those of ordinary skill in the art having the benefit of the description herein.

In general, the embodiments described herein relate to a massage device that a user can mount to massage themselves while the massage device is mounted. A massage can relieve a user's stress and pain, while enhancing the body's physical health, mental well being, and immune system, in addition to improving posture and physical movement, flexibility and athletic performance. A massage can also help increase a user's blood circulation.

The massage device can include one or more wheel assemblies, wherein a first wheel assembly of the one or more wheel assemblies can comprise: a first base; a first wheel supported at a predetermined distance from a first side of the first base; at least one first stem attached to a second side of the first base; the massage device further comprising: a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to removably receive the at least one first stem. In some embodiments, the body can be constructed and arranged to prevent the at least one first stem from rotating within the at least one socket.

The massage device can further include two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building such as, for example, a house.

In some embodiments, the first wheel assembly can be interchangeable with any other wheel assembly of the one or more wheel assemblies. The one or more wheel assemblies can include differently sized wheels and/or differently shaped wheels. In some embodiments the massage device can be portable.

In some embodiments, the body can be made primarily of metal, plastic, wood, or any combination thereof. In some embodiments, the body can be approximately 8 to 20 inches in length, approximately 6 inches in width, and approximately 1 to 2 inches in thickness. In some embodiments, the two or more arms can be made primarily of metal, plastic, wood, or any combination thereof. In some embodiments, the two or more arms can each be approximately 2 to 6 inches in length. In some embodiments, the first wheel can be approximately 2 inches to approximately 5 inches in diameter, and approximately 0.5 inches to approximately 5 inches in width.

Referring to FIG. **1**A, a massage device (e.g., **10** in FIG. **5**) can include a first wheel assembly **20**. The first wheel assembly **20** can include a first base **22**. A first leg **24** can be attached to (e.g., integrated with) a first side **25** of the first base **22**. A second leg **26** can be attached to the first side **25** of the first base. A first axle **28** can be connected to the first leg **24** and extend into a first wheel **30**. The first leg **24** can be connected to the second leg **26** by the first axle **28**. In some embodiments, the axle **28** can extend through a hub **29** of the first wheel. In some embodiments, the first axle **28** can be constructed and arranged to support a massaging head, such as, for example, the first wheel **30**. In some embodiments, the first wheel **30** can be constructed and arranged to rotate around the first axle **28**. The first wheel **30** can rotate on or rotate with the first axle **28**. In some embodiments, the first axle **28** can be rotationally fixed to the base **22** by the first **24** and/or **26** second leg to prevent the first wheel **30** from swiveling. While shown is a first wheel **30** attached to the first base **22**, a different massaging head (e.g., ball head, U-shaped head, fork head, flat head, etc.) can be attached to the first base **22** instead of the first wheel **30**.

During operation, at least a first (e.g., inner) portion **201** of the first wheel **30** can be used as an applicator of an oil, lotion, cream, ointment, etc., or any combination thereof, on any portion of a user's body. For example, at least the first portion **201** of the first wheel **30** can be at least partially water and/or oil absorbent. In some embodiments, at least the first portion **201** of the first wheel **30** can be constructed and arranged to absorb an oil, lotion, cream, ointment, or any combination thereof. In some embodiments, when at least the first portion **201** of the first wheel **30** is contacted by any portion of a user's body, at least the first portion **201** of the first wheel **30** can release the absorbed oil, lotion, cream, ointment, or any combination thereof onto any contacted portion of the user's body.

In some embodiments, at least the first portion **201** of the first wheel **30** can be porous and compressible. For example, at least the first portion **201** of the first wheel **30** can comprise a spongy material that is porous and compressible. In some embodiments, at least the first portion **201** of the first wheel **30** can comprise a textile material such as, for example, felt, cotton, polyester, etc. In some embodiments, at least the first portion **201** of the first wheel **30** can comprise a textile fiber such as, for example, wool, cotton, polyester, etc. In some embodiments, at least a second (e.g., outer) portion **202** of the first wheel **30** can be made primarily of polyurethane.

The first wheel assembly **20** can further include at least one first stem **40** attached to (e.g., integrated with) a second side **27** of the first base **22**. In some embodiments, the at least one first stem **40** is rotationally fixed to the base **22**. In some embodiments, the first side **25** of the first base **22** faces the first wheel **30**. In some embodiments, the second side **27** of the first base **22** faces the at least one first stem **40**.

The at least one first stem **40** can have a hole **32** constructed and arranged to receive a pin **36** in a first direction **35**. The at least one first stem **40** can have another hole **34** constructed and arranged to receive the pin **36** in a second direction **37** that is generally perpendicular to the first direction **35**. As detailed with respect to FIG. **1**B, the pin **36** can be constructed and arranged to fasten the first wheel assembly **20** to a body (e.g., **50** in FIG. **1**B). In some embodiments, the pin **36** can be a lynch pin.

Referring to FIG. **1**B, a massage device (e.g., **10** in FIG. **5**) can include a body **50**, the body **50** having at least one socket **60** that is constructed and arranged to receive the at least one first stem **40**. In some embodiments, the at least one socket **60** is constructed and arranged to slidably receive the at least one first stem **40**. The at least one socket **60** can be constructed and arranged to receive the at least one first stem **40** in a first orientation so that the first axle **28** is generally parallel to a first direction **128**. In some embodiments, the at least one socket **60** can be constructed and arranged to slidably release the at least one first stem **40** to separate the first wheel assembly **20** from the body **50**. FIG. **1**A illustrates that the first wheel assembly **20** is separated from the body **50** in FIG. **1**B.

Referring to FIG. **1**C, the at least one socket **60** can be constructed and arranged to receive the at least one first stem **40** in a second orientation so that the first axle **28** is generally parallel to a second direction **129** that is different from the first direction **128**. In some embodiments, the first direction **128** can be generally perpendicular to the second direction **129**. In some embodiments, the at least one socket **60** can be constructed and arranged to slidably receive and slidably release stems of different wheel assemblies (e.g., **20** in FIG. **1**A, **20'** in FIG. **9**) so that any wheel assembly can be interchangeable with any other wheel assembly having a stem of substantially the same size and shape.

The body **50** can have at least one hole **51** that is constructed and arranged to receive a pin (e.g., **36** in FIG. **1**A). In some embodiments, the at least one hole **51** can receive the pin while the at least one first stem **40** is received in the at least one socket **60**. The pin **36** can be constructed and arranged to fasten the first wheel assembly **20** to the body **50**.

In some embodiments, at least a portion **53** of the body **50** can be constructed and arranged to engage with the at least one first stem **40** to prevent the at least one first stem **40** from rotating within the at least one socket **60**. In some embodiments, a pin (e.g., **36** in FIG. **1**A) can engage with the body **50** and the at least one first stem **40** to prevent the at least one first stem **40** from rotating within the socket **60**. At least the portion **53** of the body **50** can define the at least one socket **60**. In some embodiments, the at least one socket **60** can be shaped to securely receive the at least one first stem **40**. For example, the at least one socket **60** and the at least one first stem **40** can have substantially rectangular cross-sections. However, the at least one socket **60** and the at least one first stem **40** can have any other suitably shaped cross-sections.

Referring to FIG. **2**, in some embodiments, the body **50** can be elongate, wherein the at least one socket **60** includes a plurality of sockets **61**, **62**, **63**, **64**, **65** that are arranged in a single direction **66** along a length **67** of the body **50**.

Referring to FIG. **3**, two or more arms **70** can be connected to the body **50**. In some embodiments, the two or more arms **70** can be constructed and arranged to extend from the body **50** in a first direction **79**. In some embodiments, the first direction **79** can be generally perpendicular to a surface **73** of the body **50**. The first arm **72** can be separated from a second arm **74** of the two or more arms **70** by a first distance **85** so that the first arm **72** and the second arm **74** can engage with respective moldings (e.g., **102**, **104** in FIG. **6**) on a wall (e.g., **103** in FIG. **5**). Similarly, a third arm **76** can be separated from a fourth arm **78** by the first distance **85** so that the third arm **76** and the fourth arm **78** can engage with respective moldings on the wall. The first distance **85** can be any suitable distance so that the two or more arms **70** engage with any portion of a wall (e.g., including a wall without moldings), any moldings on a wall, or any other decorative or functional objects mounted on a wall. In some embodiments, the first distance **85** can be approximately 6 inches. As walls can have different thicknesses, the first distance **85** can be any suitable distance in the range from approximately 4 inches to approximately 10 inches. In some embodiments, the two or more arms **70** can be covered by gripping material **175** (e.g., rubber) that provides traction on any portion of a wall, including moldings. In some embodiments, the two or more arms **70** can be constructed and arranged to engage with at least trees, poles and other objects that having a width of approximately 4 inches to 10 inches.

In some embodiments, the body **50** can define a channel **80** that is constructed and arranged to receive a door stop (e.g., **94** in FIG. **5**) on a first side **71** of the body **50**. In some embodiments, the body **50** can include a first elongate member **81** and a second elongate member **82** attached to (e.g., integrated with) a board member **83**. In some embodiments, the first elongate member **81** and the second elongate member **82** can be attached to the board member **83** by a fastener, an adhesive, VELCRO®, etc. In some embodiments, the first elongate member **81**, the second elongate member **82**, and a portion **84** of the board member **83** can define the channel **80**. During operation, the first elongate member **81**, the second elongate member **82** and the portion **84** of the board member **83** can engage with at least a door stop of a door jamb area (e.g., **90** in FIG. **5**) of a wall (e.g., **103** in FIG. **5**).

Referring to FIG. **4**, the two or more arms **70** can be fastened to the body **50** with fasteners **75**. Each of the two or more arms **70** can be constructed and arranged to be rotated in directions **98**, **99** about a corresponding fastener **75**. In some embodiments, each of the two or more arms **70** can be constructed and arranged to be rotated so each of the two arms **70** is generally parallel to a second direction **89** that is generally perpendicular to the first direction **79**. In some embodiments, each of the two or more arms **70** can be constructed and arranged to be rotated so each of the two arms **70** is generally parallel to the surface (e.g., **73** in FIG. **3**) of the body **50**. In some embodiments, each of the two or more arms **70** can be constructed and arranged to be rotated so each of the two arms **70** is flush with the surface **73** of the body **50**.

A liner **86** can be disposed over the first side **71** of the body **50**. In some embodiments the liner **86** can be positioned over the body **50** or any portion thereof, including the surface **73** of the body **50**, the first elongate member **81**, the second elongate member **82**, the portion **84** of the board member **83**, or any combination thereof. In some embodiments, the liner **86** can be positioned within the channel **80**. The liner **86** can be constructed and arranged to provide traction on at least a door jamb area (e.g., **90** in FIG. **5**) of a wall (e.g., **103** in FIG. **5**), including a door stop (e.g., **94** in FIG. **5**), moldings (e.g., **102**, **104** in FIG. **6**), or any combination thereof. In some embodiments, the liner **86** can be constructed and arranged to provide cushioning between any portion of the wall (e.g., including the door jamb area and the moldings) and the massage device to protect any portion of the wall from being damaged (e.g., scratched) by the massage device. In some embodiments, the liner **86** can be made primarily of gripping material. For example, the liner **86** can be textured and rubberized.

Referring to FIG. **5**, a massage device **10** can include two or more arms **70** are constructed and arranged to removably mount the body **50** onto a wall **103** of a building **100** by removably engaging with at least a first molding **102** on a first side **105** of the wall **103** and a second molding (e.g., **104** in FIG. **6**) on a second side (e.g., **107** in FIG. **6**) of the wall **103**. When the body **50** is mounted to the wall **103**, the wheel **30** can also be mounted to the wall **103**. A user **200** can massage any portion of the user's body, such as, for example, their leg **203** by pressing their leg **203** against the wheel **30** and by rolling the wheel **30** with and over their leg **203** while the massage device **10** is mounted. Any portion of the user's body, such as the user's back, neck, chest, shoulder, etc., can be massaged in a similar manner by adjusting a height **111** of the massage device **10** as necessary. The user **200** can massage themselves in different manners, such as by rolling the wheel **30** against any portion of the user's body while the massage device **10** is mounted onto the wall **103**, or by moving any portion of the user's body against the wheel **30** and in a direction parallel to the first axle **28**, which prevents the wheel **30** from rolling. The user **200** can increase the amount of pressure received during the massage, such as by pushing any portion of the user's body against the wheel **30** with increased force, or by leaning any portion of the user's body against the wheel **30**. The massage device **10** can be constructed and arranged to support at least any suitable partial weight of the user **200**. For example, the massage device **10**, including the wheel assembly **20**, can be constructed and arranged to support approximately 10 pounds to approximately 100 pounds.

The height **111** of the massage device **10** can be adjusted by removing the body **50** from the wall **103** (e.g., by pulling the body **50** from the wall **103**), and by removably mounting the body **50** onto the wall **103** at any other height along the door jamb area **90** (e.g., by pushing the body **50** toward the wall **103** while the two or more arms **70** are extended toward the wall **103**). In some embodiments, the massage device **10** can be moved to any height along the door jamb area **90**, and for example along the direction **109** that is generally parallel to the door stop **94**. In some embodiments, the massage device **10** can be moved along the door stop **94**.

Referring to FIG. **6**, a first arm **76'** of the two or more arms **70** is constructed and arranged to engage with at least the first molding **102** on the first side **105** of the wall **103**, and a second arm **78'** of the two or more arms **70** is constructed and arranged to engage with at least the second molding **104** on the second side **107** that is opposite to the first side **105** of the wall **103**. In some embodiments, the first arm **76'** and the second arm **78'** can be curved toward each other to better grip the first **102** and second **104** moldings.

In some embodiments, a distance **85'** between the first arm **76'** and the second arm **78'** can be adjustable. For example, the first arm **76'** and the second arm **78'** can be connected by a telescoping shaft **106** comprising an outer (e.g., hollow) shaft **110** that is constructed and arranged to receive an inner shaft **108**. In some embodiments, the first arm **76'** can be attached to the outer shaft **110**, and the second arm **78'** can be attached to the inner shaft **108**. As the inner shaft **108** is inserted into the outer shaft **110**, the distance **85'** between the first arm **76'** and the second arm **78'** can be reduced. As the inner shaft **108** is retracted from the outer shaft **110**, the distance **85'** between the first arm **76'** and the second arm **78'** can be increased.

A lever **112** can be attached to the outer shaft **110**. In some embodiments, the lever **112** can be attached to at least one tooth **116** that is constructed and arranged to engage with teeth **114** on the inner shaft **108**. In FIG. **6**, the lever is in an open position wherein the at least one tooth **116** attached to the lever **112** is not engaged with the any of the teeth **114** on the inner shaft **108**.

Referring to FIG. **7**, the lever **112** can be rotated about a pivot **125** so that the lever **112** is in a closed position. In the closed position, the at least one tooth **116** attached to the lever **112** is engaged with at least some of the teeth **114** on the inner shaft **108**. When the at least one tooth **116** attached to the lever **112** is engaged with at least some of the teeth **114** on the inner shaft **108**, the inner shaft **108** can be affixed to the outer shaft **110**, preventing the inner shaft **108** from being inserted into, or retracted from, the outer shaft **110**.

A cavity **120** in the lever **112** can be constructed and arranged to receive a portion **122** of the body **50**. The portion **122** of the body can have a recess **124** that is constructed and arranged to receive a protrusion **126** in the cavity **120** of the lever **112**, thereby interlocking the lever **112** with the body **50**, which prevents the lever **112** from being rotated about the pivot **125**, and prevents the at least one tooth **116** from disengaging with at least some of the teeth **114** on the inner shaft **108**.

Referring to FIG. **8**, a massage device **10'** can include a body **50'** that can be attached to a base **152** of a stand **150**, the stand **150** further comprising two or more vertical supports **154** attached to the base **152**, the two or more vertical supports **154** being attached to horizontal supports **156**. The horizontal supports **156** can be attached to the body **50'** to provide lateral support thereto. In some embodiments, the body **50'** can be approximately 5 feet to approximately 7 feet in height.

In some embodiments, the body **50'** can have at least one socket **60'** that is constructed and arranged to slidably receive and slidably release stems (e.g., **40** in FIG. **1**A) of different wheel assemblies (e.g., **20** in FIG. **1**A, **20'** in FIG. **9**) so that any wheel assembly can be received and released by the at least one socket **60'**.

Referring to FIG. **9**, the body **50'** can have at least one hole **51'** that is constructed and arranged to receive a pin **36**. The pin **36** can be received by the at least one hole **51'** of the body **50'** while the pin **36** is received in a hole (e.g., **32**, **34** in FIG. **1**A) of at least one stem (e.g., **40** in FIG. **1**A) of the first wheel assembly **20'**, thereby fastening the first wheel assembly **20'** to the body **50'**. A first axle **28'** of the first wheel assembly **20'** can be generally parallel to a first (e.g., horizontal) direction **161'** when, for example, the pin **36** is received in a hole (e.g., **32** in FIG. **1**A) of the at least one first stem in a direction (e.g., **35** in FIG. **1**A) that is generally parallel to the first axle **28'**. When the first axle **28'** is generally parallel to the first direction **161'**, the wheel **30'** can roll upward or downward on a user's body.

The wheel **30'** can have substantially angled edges **170** that are constructed and arranged to provide increased pressure when rolled on any portion of a user's body. However, in other embodiments, the wheel can be rounded such as the wheel **30** in FIG. **1**A.

Referring to FIG. **10**, the first axle **28'** of the first wheel assembly **20'** can be generally parallel to a second (e.g., vertical) direction **162'** when, for example, the pin **36** is received in a hole (e.g., **34** in FIG. **1**A) of the at least one first stem (e.g., **40** in FIG. **1**A) in a direction (e.g., **37** in FIG. **1**A) that is generally perpendicular to the first axle **28**. In some embodiments, the second direction **162'** is different than the first direction. In some embodiments, the second direction **162'** is generally perpendicular to the first direction **161'**. When the first axle **28'** is generally parallel to the second direction **162'**, the wheel **30'** can roll side-to-side on a user's body.

The following description of variants is only illustrative of components, elements, acts, products, and methods considered to be within the scope of the invention and are not in any way intended to limit such scope by what is specifically disclosed or not expressly set forth. The components, elements, acts, products, and methods as described herein may be combined and rearranged other than as expressly described herein and are still considered to be within the scope of the invention.

According to variation 1, a massage device can include a first wheel assembly, including: a first base; a first leg attached to a first side of the first base; a first wheel; a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel; wherein the first wheel is constructed and arranged to rotate around the first axle; the first wheel assembly further including: at least one first stem attached to a second side of the first base, wherein: the first side of the first base faces the first wheel; the second side of the first base faces the at least one first stem; the massage device further comprising: a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket; and two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

Variation 2 can include the massage device of variation 1, wherein at least a first portion of the first wheel comprises a spongy material.

Variation 3 can include the massage device of variation 1, further comprising a pin, wherein: the at least one first stem has a hole constructed and arranged to receive the pin; the body has a hole constructed and arranged to receive the pin; the pin is constructed and arranged to fasten the first wheel assembly to the body.

Variation 4 can include the massage device of variation 1, wherein the body is elongate, wherein the at least one socket includes a plurality of sockets that are arranged in a single direction along a length of the body.

Variation 5 can include the massage device of variation 1, wherein at least a second portion of the first wheel is made primarily of polyurethane.

Variation 6 can include the massage device of variation 1, wherein body defines a channel that is constructed and arranged to receive a door stop.

Variation 7 can include the massage device of variation 1, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

According to variation 8, a massage device can include a first wheel assembly, including: a first base; a first leg attached to a first side of the first base; a first wheel; a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel; wherein the first wheel is constructed and arranged to rotate around the first axle; the first wheel assembly further including: at least one first stem attached to a second side of the first base, wherein: the first side of the first base faces the first wheel; the second side of the first base faces the at least one first stem; the massage device further comprising: a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem so that the first axle is generally parallel to a first direction, wherein the at least one socket is further constructed and arranged to receive the at least one first stem so that the first axle is generally parallel to a second direction that is different from the first direction, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket; and two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

Variation 9 can include the massage device of variation 8, wherein at least a first portion of the first wheel comprises a spongy material.

Variation 10 can include the massage device of variation 8, further comprising a pin, wherein: the at least one first stem has a hole constructed and arranged to receive the pin; the body has a hole constructed and arranged to receive the pin; the pin is constructed and arranged to fasten the first wheel assembly to the body.

Variation 11 can include the massage device of variation 8, wherein the body is elongate, wherein the at least one socket includes a plurality of sockets that are arranged in a single direction along a length of the body.

Variation 12 can include the massage device of variation 8, wherein at least a second portion of the first wheel is made primarily of polyurethane.

Variation 13 can include the massage device of variation 8, wherein body defines a channel that is constructed and arranged to receive a door stop.

Variation 14 can include the massage device of variation 8, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

According to variation 15, a massage device can include: a first wheel assembly, including: a first base; a first leg attached to a first side of the first base; a first wheel; a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel; wherein the first wheel is constructed and arranged to rotate around the first axle; the first wheel assembly further including: at least one first stem attached to a second side of the first base, wherein: the first side of the first base faces the first wheel; the second side of the first base faces the at least one first stem; the massage device further comprising: a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to slidably receive the at least one first stem, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket; and two or more arms connected to the body, wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

Variation 16 can include the massage device of variation 15, wherein at least a first portion of the first wheel comprises a spongy material.

Variation 17 can include the massage device of variation 15, further comprising a pin, wherein: the at least one first stem has a hole constructed and arranged to receive the pin; the body has a hole constructed and arranged to receive the pin; the pin is constructed and arranged to fasten the first wheel assembly to the body.

Variation 18 can include the massage device of variation 15, wherein at least a second portion of the first wheel is made primarily of polyurethane.

Variation 19 can include the massage device of variation 15, wherein body defines a channel that is constructed and arranged to receive a door stop.

Variation 20 can include the massage device of variation 15, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

Many different embodiments have been disclosed herein, in connection with the above description and the drawings. It will be understood that it would be unduly repetitious and obfuscating to describe and illustrate every combination and subcombination of these embodiments. Accordingly, all embodiments can be combined in any way and/or combination, and the present specification, including the drawings, shall be construed to constitute a complete written description of all combinations and subcombinations of the embodiments described herein, and of the manner and process of making and using them, and shall support claims to any such combination or subcombination.

An equivalent substitution of two or more elements can be made for anyone of the elements in the claims below or that a single element can be substituted for two or more elements in a claim. Although elements can be described above as acting in certain combinations, and even initially claimed as such, it is to be expressly understood that one or more elements from a claimed combination can, in some cases, be excised from the combination and that the claimed combination can be directed to a subcombination or variation of a subcombination.

It will be appreciated by persons skilled in the art that the present embodiment is not limited to what has been particularly shown and described hereinabove. A variety of modifications and variations are possible considering the above teachings without departing from the following claims.

What is claimed is:

1. A massage device, comprising:
a first wheel assembly, including:
a first base;
a first leg attached to a first side of the first base;
a first wheel;
a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel;
wherein the first wheel is constructed and arranged to rotate around the first axle;
the first wheel assembly further including:
at least one first stem attached to a second side of the first base, wherein:
the first side of the first base faces the first wheel;
the second side of the first base faces the at least one first stem;
the massage device further comprising:
a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket, wherein the body comprises a telescoping shaft comprising a pivot, a lever, an inner shaft having at least one tooth, and an outer shaft, wherein the telescoping shaft is constructed and arranged to adjust a distance between two or more arms connected to the body, wherein the lever defines a cavity constructed and arranged to receive a portion of the body, thereby interlocking the lever with the body, which prevents the lever from being rotated about the pivot, and prevents the lever from disengaging with at least some of the tooth of the inner shaft; and
wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

2. The massage device of claim 1, wherein at least a first portion of the first wheel comprises a spongy material.

3. The massage device of claim 1, further comprising a pin,
wherein:
the at least one first stem has a hole constructed and arranged to receive the pin;
the body has a hole constructed and arranged to receive the pin;
the pin is constructed and arranged to fasten the first wheel assembly to the body.

4. The massage device of claim 1, wherein the body is elongated, wherein the at least one socket includes a plurality of sockets that are arranged in a single direction along a length of the body.

5. The massage device of claim 1, wherein at least a second portion of the first wheel is made primarily of polyurethane.

6. The massage device of claim 1, wherein the body defines an adjustable channel that is constructed and arranged to receive a door stop.

7. The massage device of claim 1, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

8. A massage device, comprising:
a first wheel assembly, including:
a first base;
a first leg attached to a first side of the first base;
a first wheel;
a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel;
wherein the first wheel is constructed and arranged to rotate around the first axle;
the first wheel assembly further including:
at least one first stem attached to a second side of the first base, wherein:
the first side of the first base faces the first wheel;
the second side of the first base faces the at least one first stem;
the massage device further comprising:
a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to receive the at least one first stem so that the first axle is generally parallel to a first direction, wherein the at least one socket is further constructed and arranged to receive the at least one first stem so that the first axle is generally parallel to a second direction that is different from the first direction, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket, and wherein the body comprises a telescoping shaft comprising a pivot, a lever, an inner shaft having at least one tooth, and an outer shaft, wherein the telescoping shaft is constructed and arranged to adjust a distance between two or more arms connected to the body, wherein the lever defines a cavity constructed and arranged to receive a portion of the body, thereby interlocking the lever with the body, which prevents the lever from being rotated about the pivot, and prevents the lever from disengaging with at least some of the tooth of the inner shaft; and
wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

9. The massage device of claim 8, wherein at least a first portion of the first wheel comprises a spongy material.

10. The massage device of claim 8, further comprising a pin,
wherein:
the at least one first stem has a hole constructed and arranged to receive the pin;
the body has a hole constructed and arranged to receive the pin;
the pin is constructed and arranged to fasten the first wheel assembly to the body.

11. The massage device of claim 8, wherein the body is elongated, wherein the at least one socket includes a plurality of sockets that are arranged in a single direction along a length of the body.

12. The massage device of claim **8**, wherein at least a portion of the first wheel is made primarily of polyurethane.

13. The massage device of claim **8**, wherein the body defines an adjustable channel that is constructed and arranged to receive a door stop.

14. The massage device of claim **8**, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

15. A massage device, comprising:

a first wheel assembly, including:

a first base;

a first leg attached to a first side of the first base;

a first wheel;

a first axle connected to the first leg, the first axle extending into the first wheel, the first axle being constructed and arranged to support the first wheel;

wherein the first wheel is constructed and arranged to rotate around the first axle;

the first wheel assembly further including:

at least one first stem attached to a second side of the first base, wherein:

the first side of the first base faces the first wheel;

the second side of the first base faces the at least one first stem;

the massage device further comprising:

a body, the body having at least one socket, wherein the at least one socket is constructed and arranged to slidably receive the at least one first stem, and wherein the body is constructed and arranged to engage with the at least one first stem to prevent the at least one first stem from rotating within the at least one socket, wherein the body comprises a telescoping shaft comprising a pivot, a lever, an inner shaft having at least one tooth, and an outer shaft, wherein the telescoping shaft is constructed and arranged to adjust a distance between two or more arms connected to the body, wherein the lever defines a cavity constructed and arranged to receive a portion of the body, thereby interlocking the lever with the body, which prevents the lever from being rotated about the pivot, and prevents the lever from disengaging with at least some of the tooth of the inner shaft; and

wherein the two or more arms are constructed and arranged to removably mount the body onto a wall of a building by removably engaging with at least a first molding on a first side of the wall and a second molding on a second side of the wall, wherein a first arm of the two or more arms is constructed and arranged to engage with at least the first molding on the first side of the wall, and wherein a second arm of the two or more arms is constructed and arranged to engage with at least the second molding on the second side of the wall.

16. The massage device of claim **15**, wherein at least a first portion of the first wheel comprises a spongy material.

17. The massage device of claim **15**, further comprising a pin,

wherein:

the at least one first stem has a hole constructed and arranged to receive the pin;

the body has a hole constructed and arranged to receive the pin;

the pin is constructed and arranged to fasten the first wheel assembly to the body.

18. The massage device of claim **15**, wherein at least a portion of the first wheel is made primarily of polyurethane.

19. The massage device of claim **15**, wherein the body defines a channel that is constructed and arranged to receive a door stop.

20. The massage device of claim **15**, further comprising a textured rubberized liner disposed over at least a portion of a first side of the body.

* * * * *