US012396546B2

(12) United States Patent
Vollmer

(10) **Patent No.:** **US 12,396,546 B2**

(45) **Date of Patent:** **Aug. 26, 2025**

(54) **BACKPACK WITH HEATING AND COOLING ELEMENTS**

(71) Applicant: **Dimitri Vollmer**, Lakewood, WA (US)

(72) Inventor: **Dimitri Vollmer**, Lakewood, WA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 65 days.

(21) Appl. No.: **18/389,545**

(22) Filed: **Nov. 14, 2023**

(65) **Prior Publication Data**

US 2025/0151879 A1 May 15, 2025

(51) **Int. Cl.**

A45F 3/02	(2006.01)
A63B 60/60	(2015.01)
A63B 71/00	(2006.01)
A45F 3/00	(2006.01)
A45F 5/00	(2006.01)

(52) **U.S. Cl.**

CPC ***A45F 3/02*** (2013.01); ***A63B 60/60*** (2015.10); ***A63B 71/0045*** (2013.01); *A45F 2003/001* (2013.01); *A45F 2005/002* (2013.01)

(58) **Field of Classification Search**

CPC A45F 3/02; A45F 2003/001; A45F 2005/002; A63B 60/60; A63B 71/0045

USPC 206/315.1

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,693,402 A *	9/1987	Comeau	A45F 3/04	224/604
D370,560 S	6/1996	Doerbaum		
6,229,132 B1	5/2001	Knetter		
7,004,317 B2	2/2006	Severa		
7,278,539 B2 *	10/2007	Souza	A45C 3/00	190/110
7,395,930 B2 *	7/2008	Tauchen	A45C 3/00	206/315.9
8,820,523 B1	9/2014	Breza		
2003/0042157 A1 *	3/2003	Mays	A45C 13/10	206/315.9
2006/0151345 A1 *	7/2006	Coffing	A45C 5/00	206/315.1
2006/0207898 A1	9/2006	Cheng		
2007/0164064 A1 *	7/2007	Nathan	A45F 3/04	224/153
2008/0011568 A1 *	1/2008	Siwak	A45C 13/28	190/115
2010/0176012 A1 *	7/2010	Carter	A45F 5/1566	206/315.3
2011/0174583 A1 *	7/2011	Yoneno	A45C 13/28	190/103
2012/0097495 A1 *	4/2012	Moore	A45C 13/08	190/110
2013/0233661 A1 *	9/2013	Scott	A45F 3/047	190/102

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1352674 10/2003

Primary Examiner — Jacob K Ackun

(57) **ABSTRACT**

A heating and cooling backpack apparatus for storing baseball bats and selectively heating and cooling parts of the bag includes a body having an outer shell which defines an interior space. A carrying strap is coupled to a back side of the body and a bat sleeve is coupled to the body for holding a baseball bat or similar sports equipment. A bat heater selectively heats the bat sleeve, and a back heater cooler selectively heats and selectively cools an outer surface of the body across the back side.

18 Claims, 9 Drawing Sheets

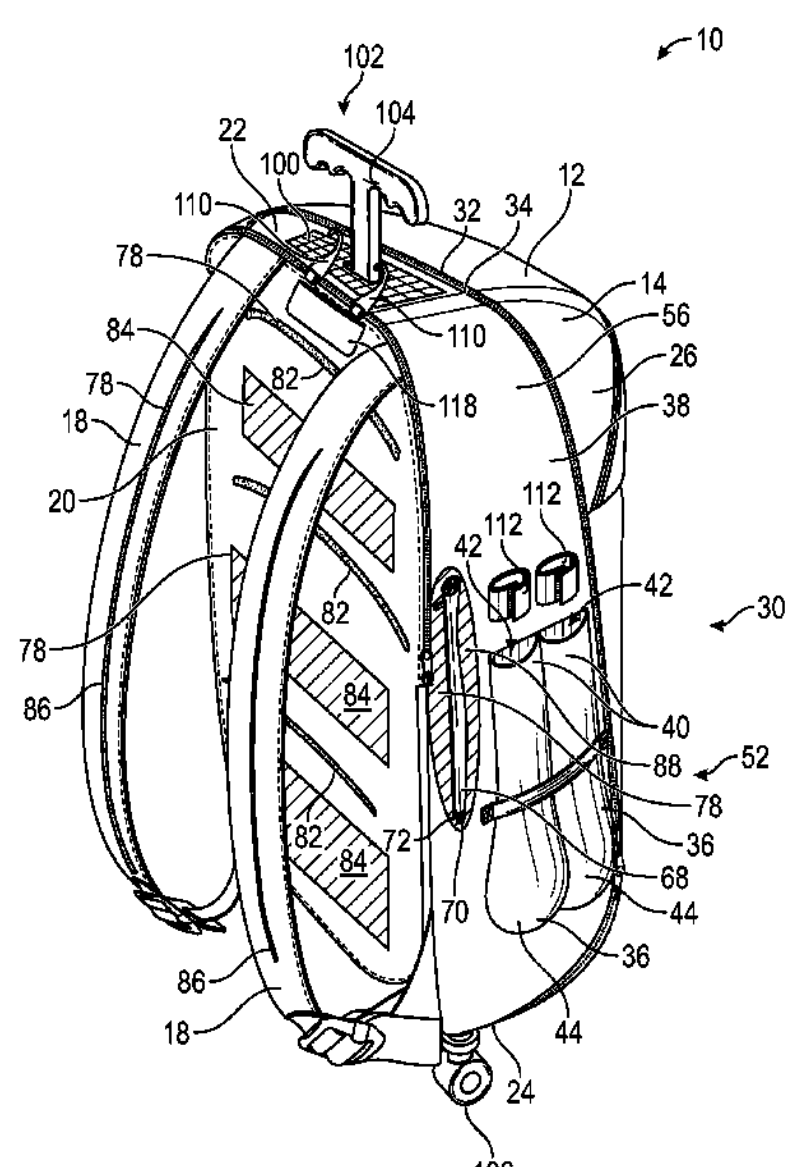

(56) **References Cited**

U.S. PATENT DOCUMENTS

2014/0262661	A1*	9/2014	Mathieu	A45C 5/14 16/45
2017/0251781	A1	9/2017	Wilson	
2019/0183235	A1	6/2019	Yang	

* cited by examiner

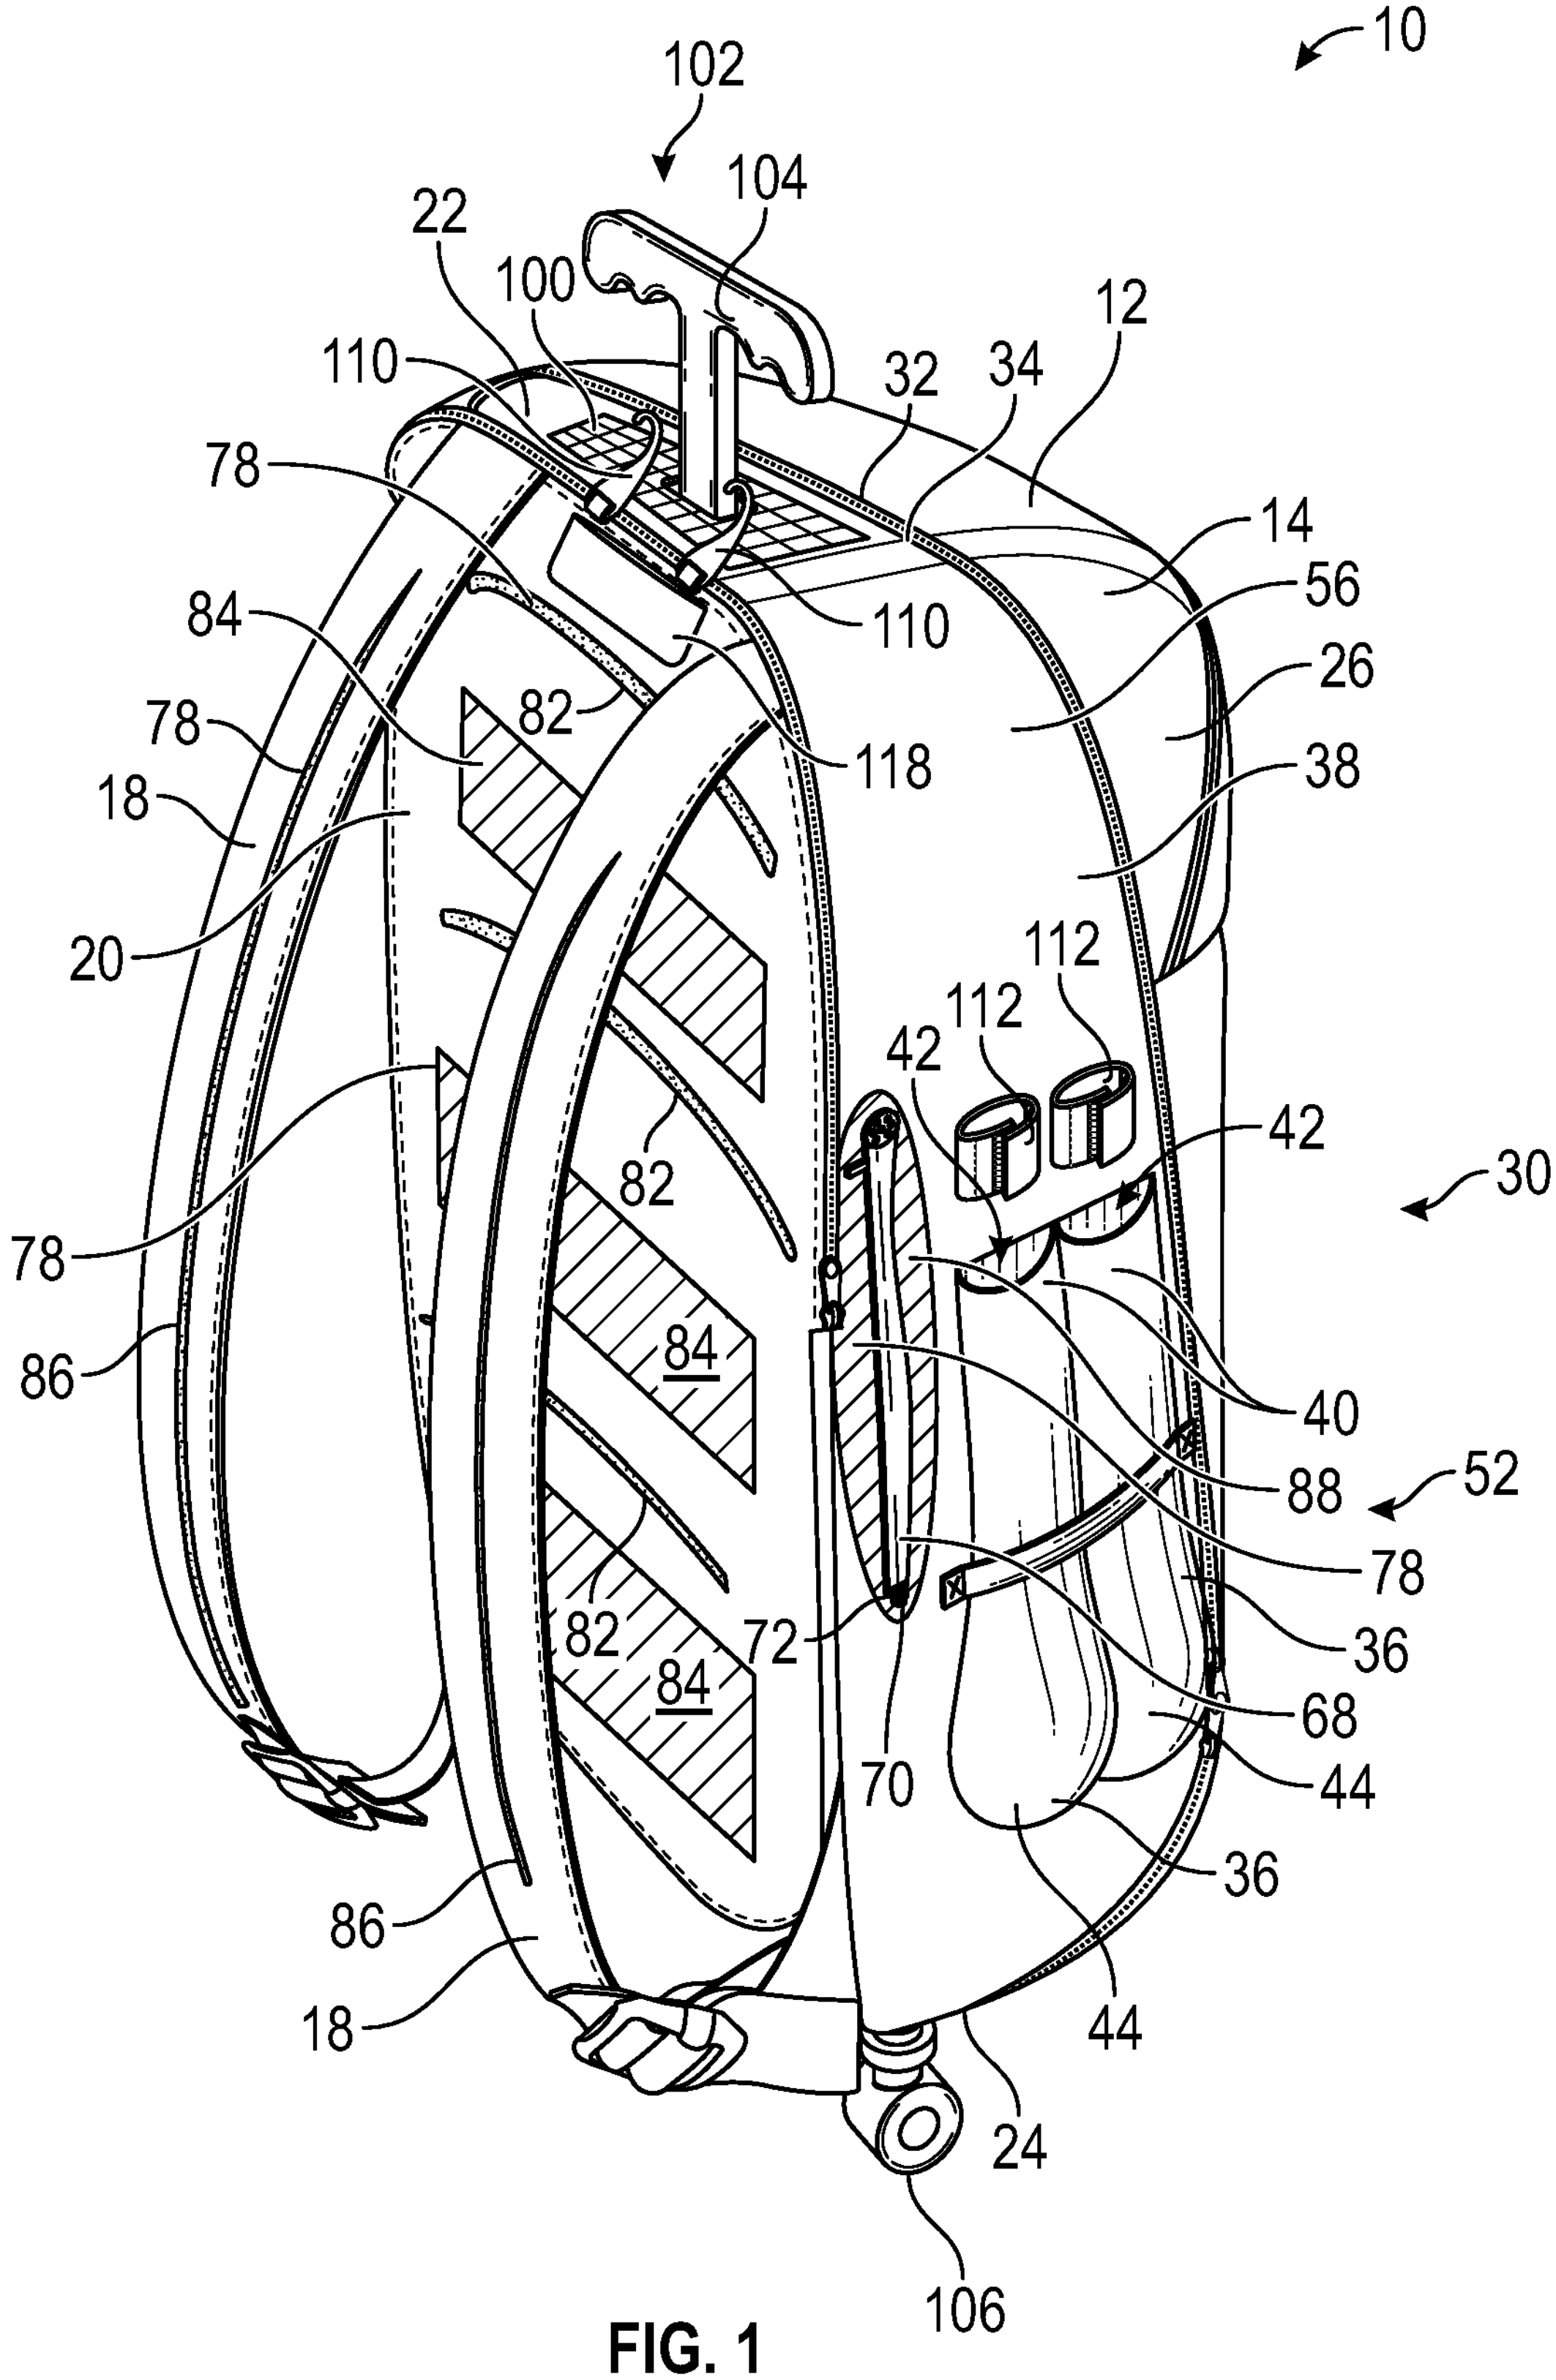
10
102
104
22
100
12
110
32
34
78
14
110
56
84
26
82
118
78
18
38
20
112
112
42
42
30
78
84
82
86
40
88
52
78
84
36
72
82
68
70
44
36
86
18
44
24
106

FIG. 1

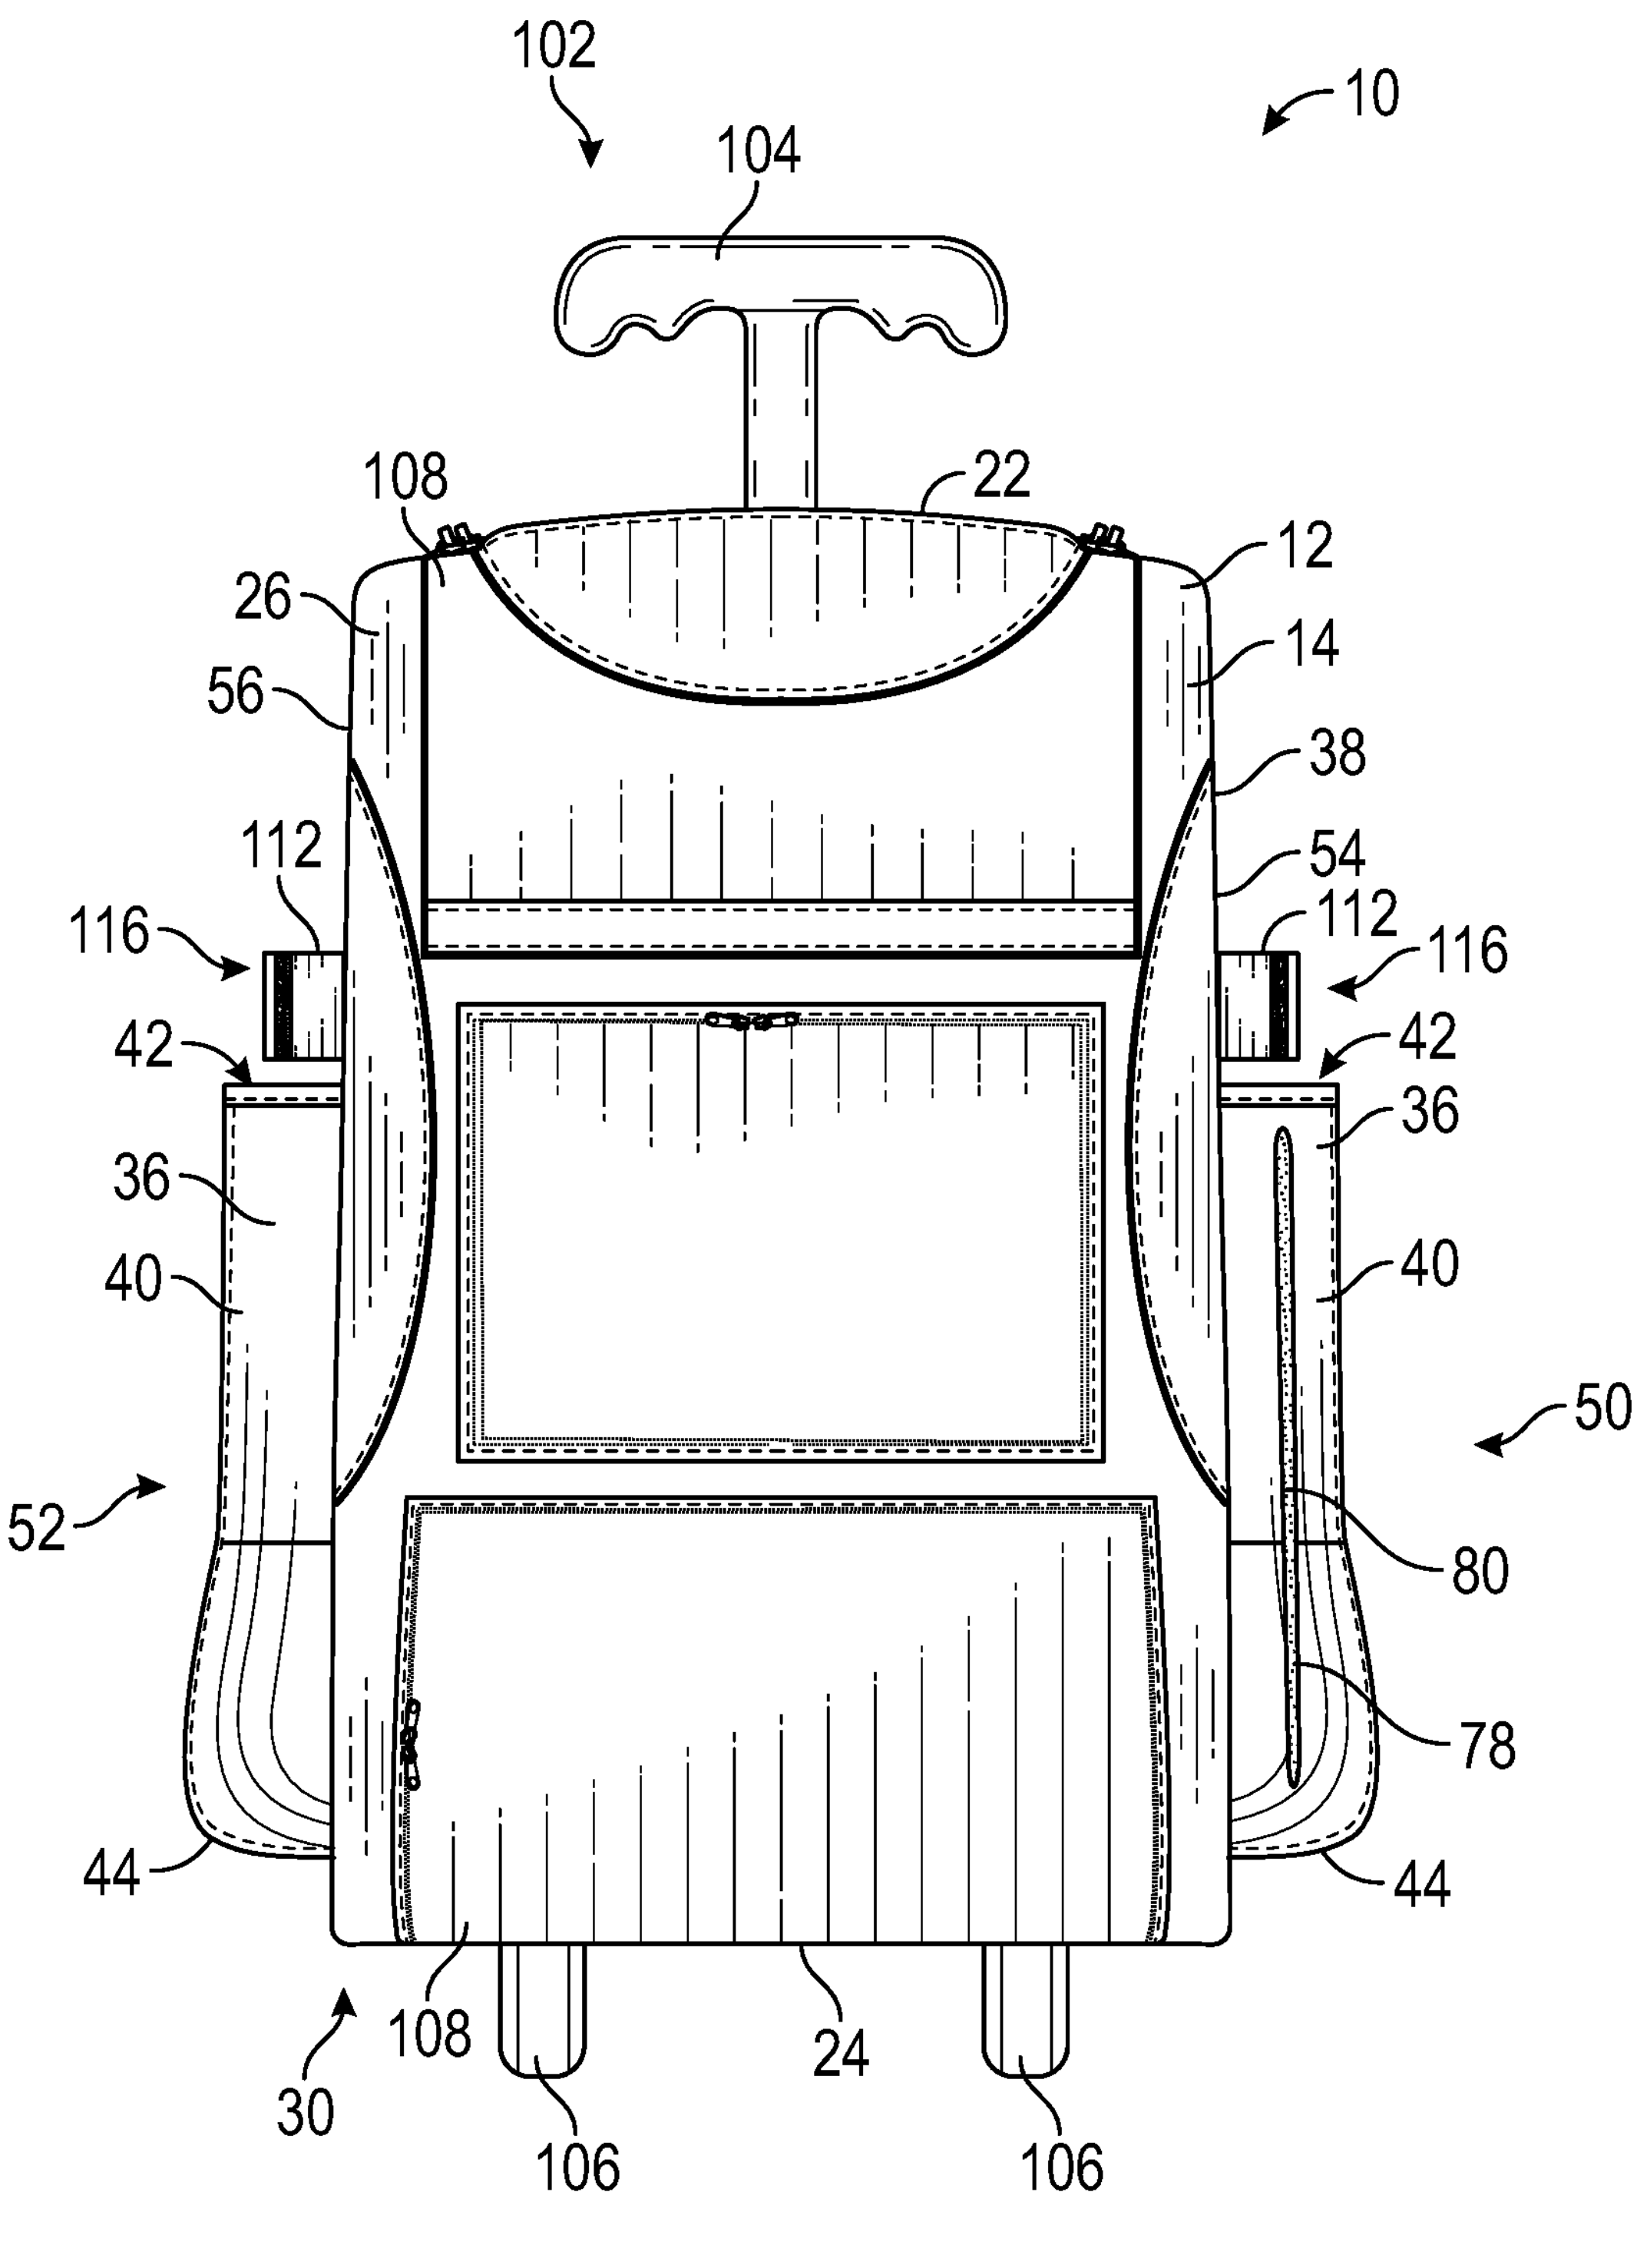
102
10
104
108
22
12
26
14
56
38
54
112
116
112
116
42
42
36
36
40
40
50
52
80
78
44
44
108
24
30
106
106

FIG. 2

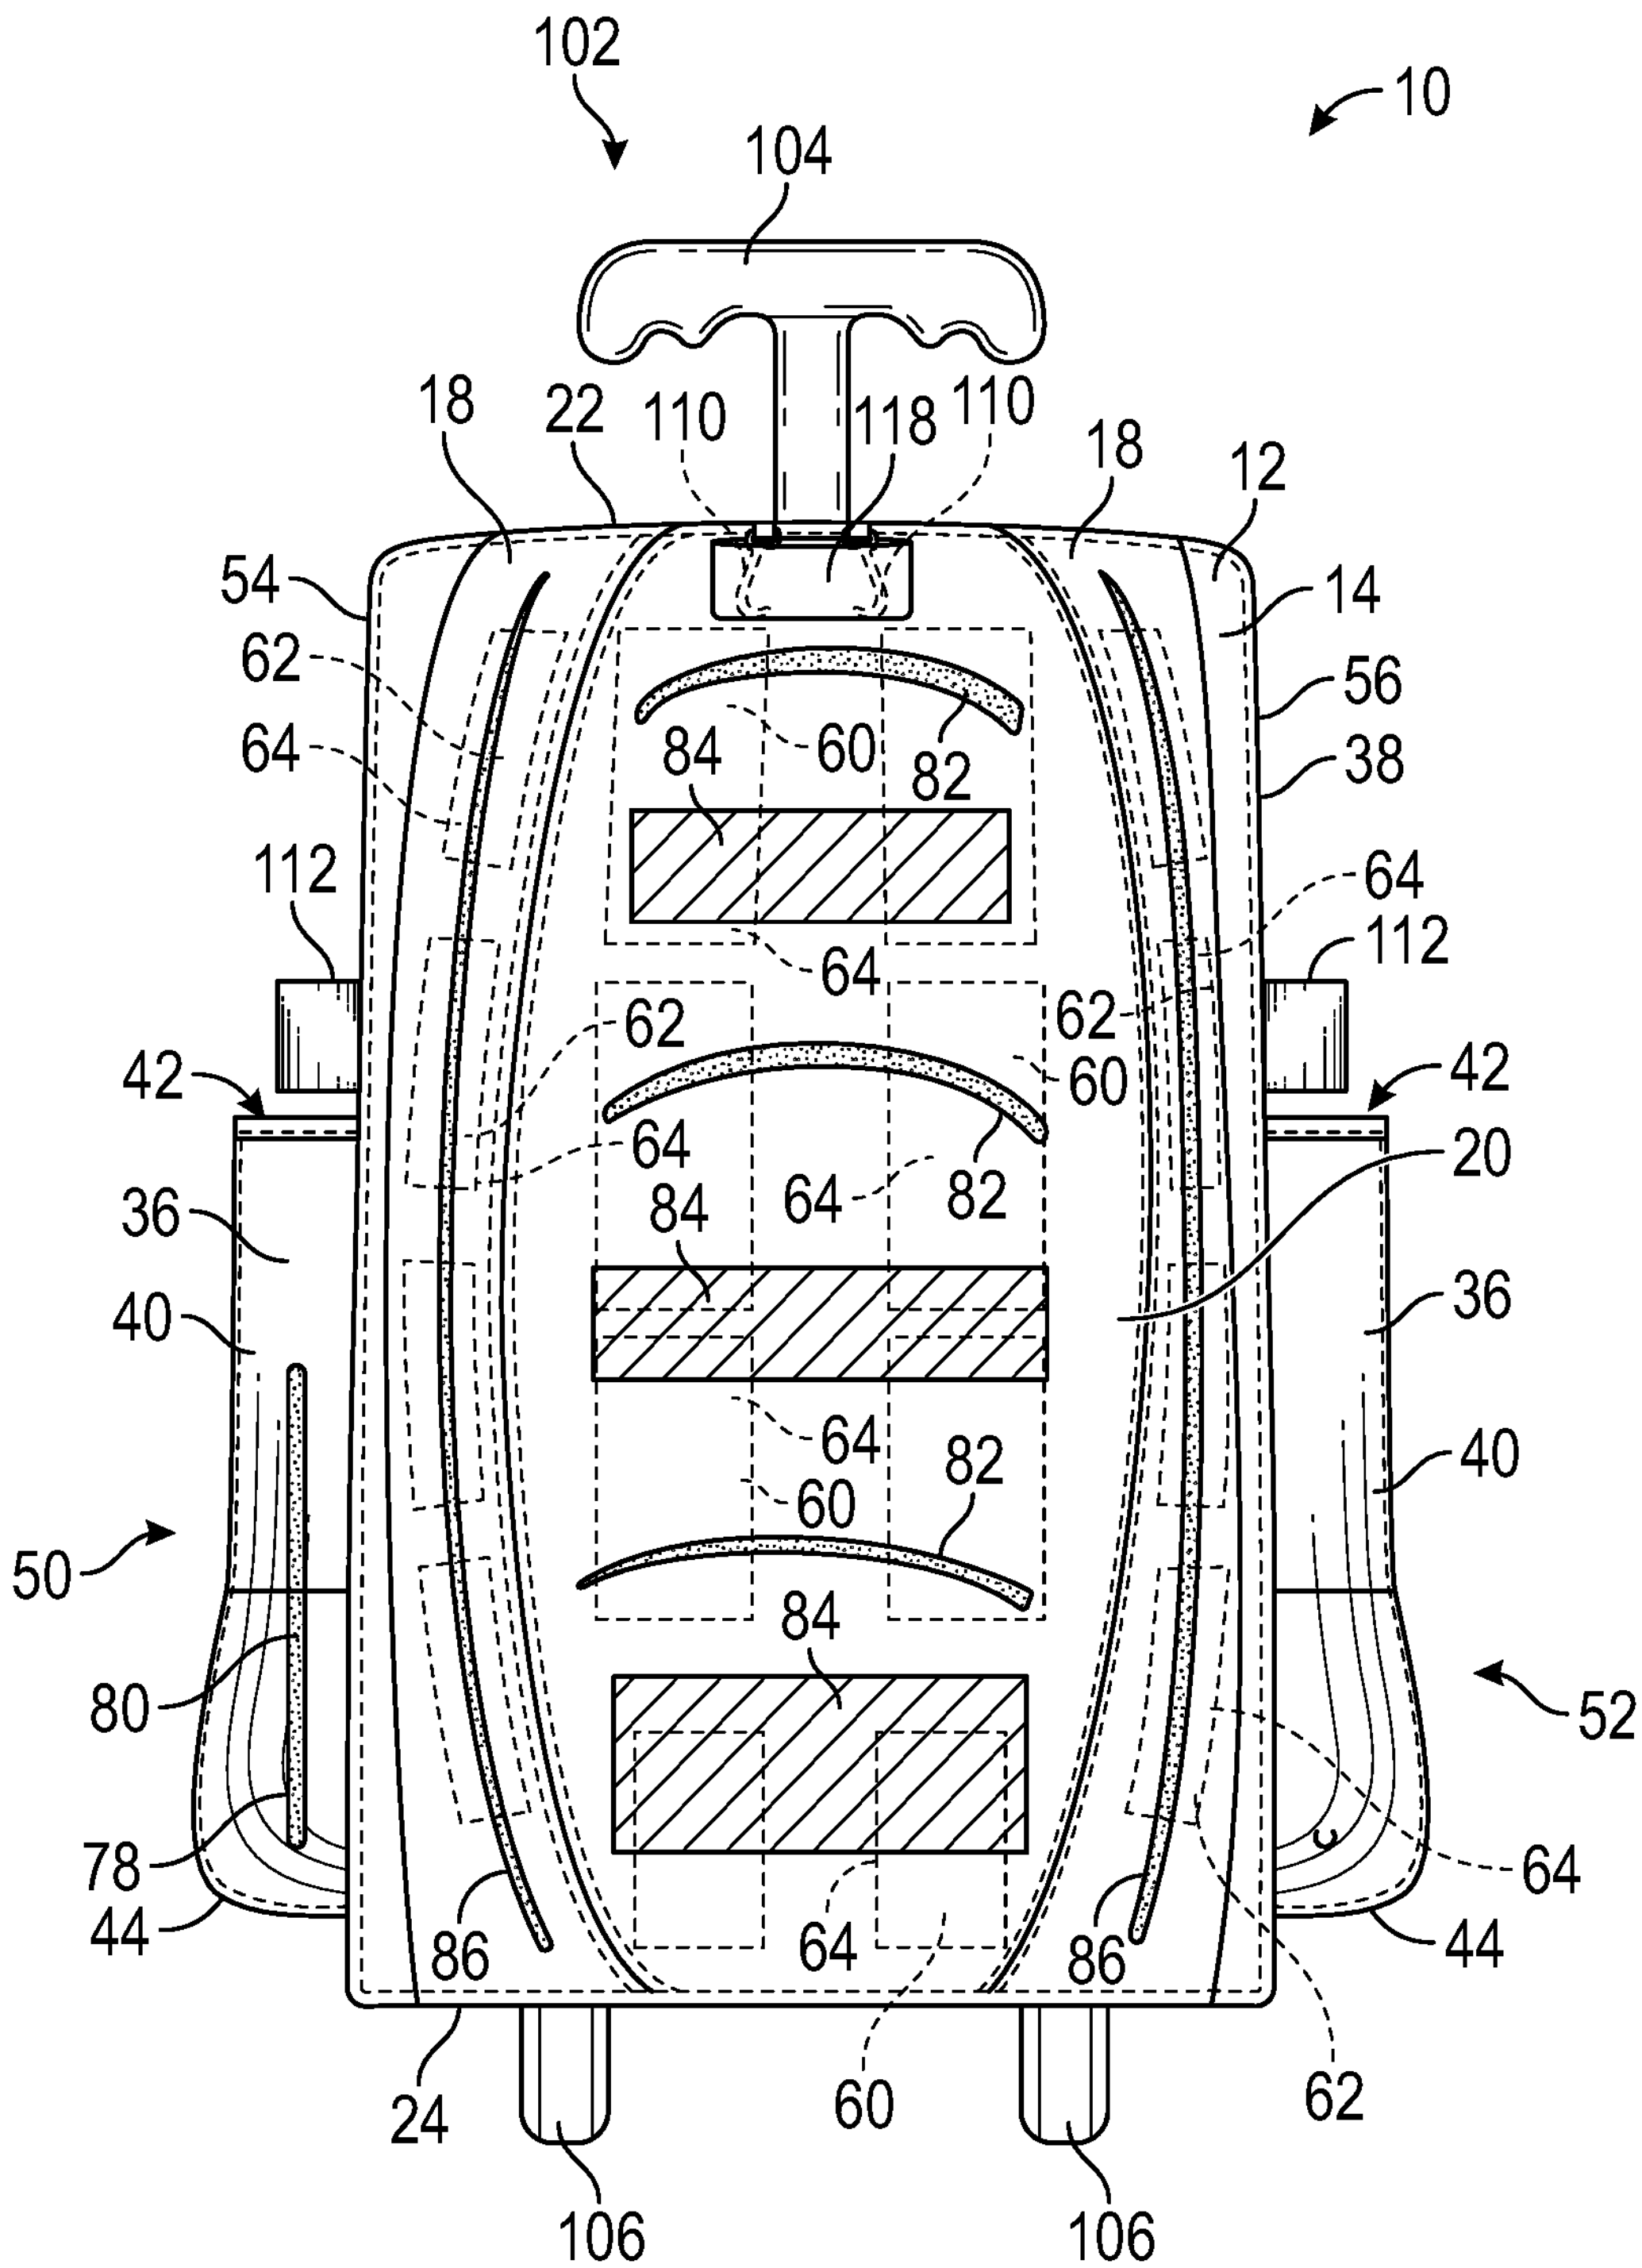
102
10
104
18
22
110
118
110
18
12
54
14
62
56
64
60
38
84
82
112
64
64
112
62
62
42
60
42
64
36
84
64
82
20
40
84
36
64
40
82
50
60
84
52
80
78
64
44
86
64
86
44
24
60
62
106
106

FIG. 3

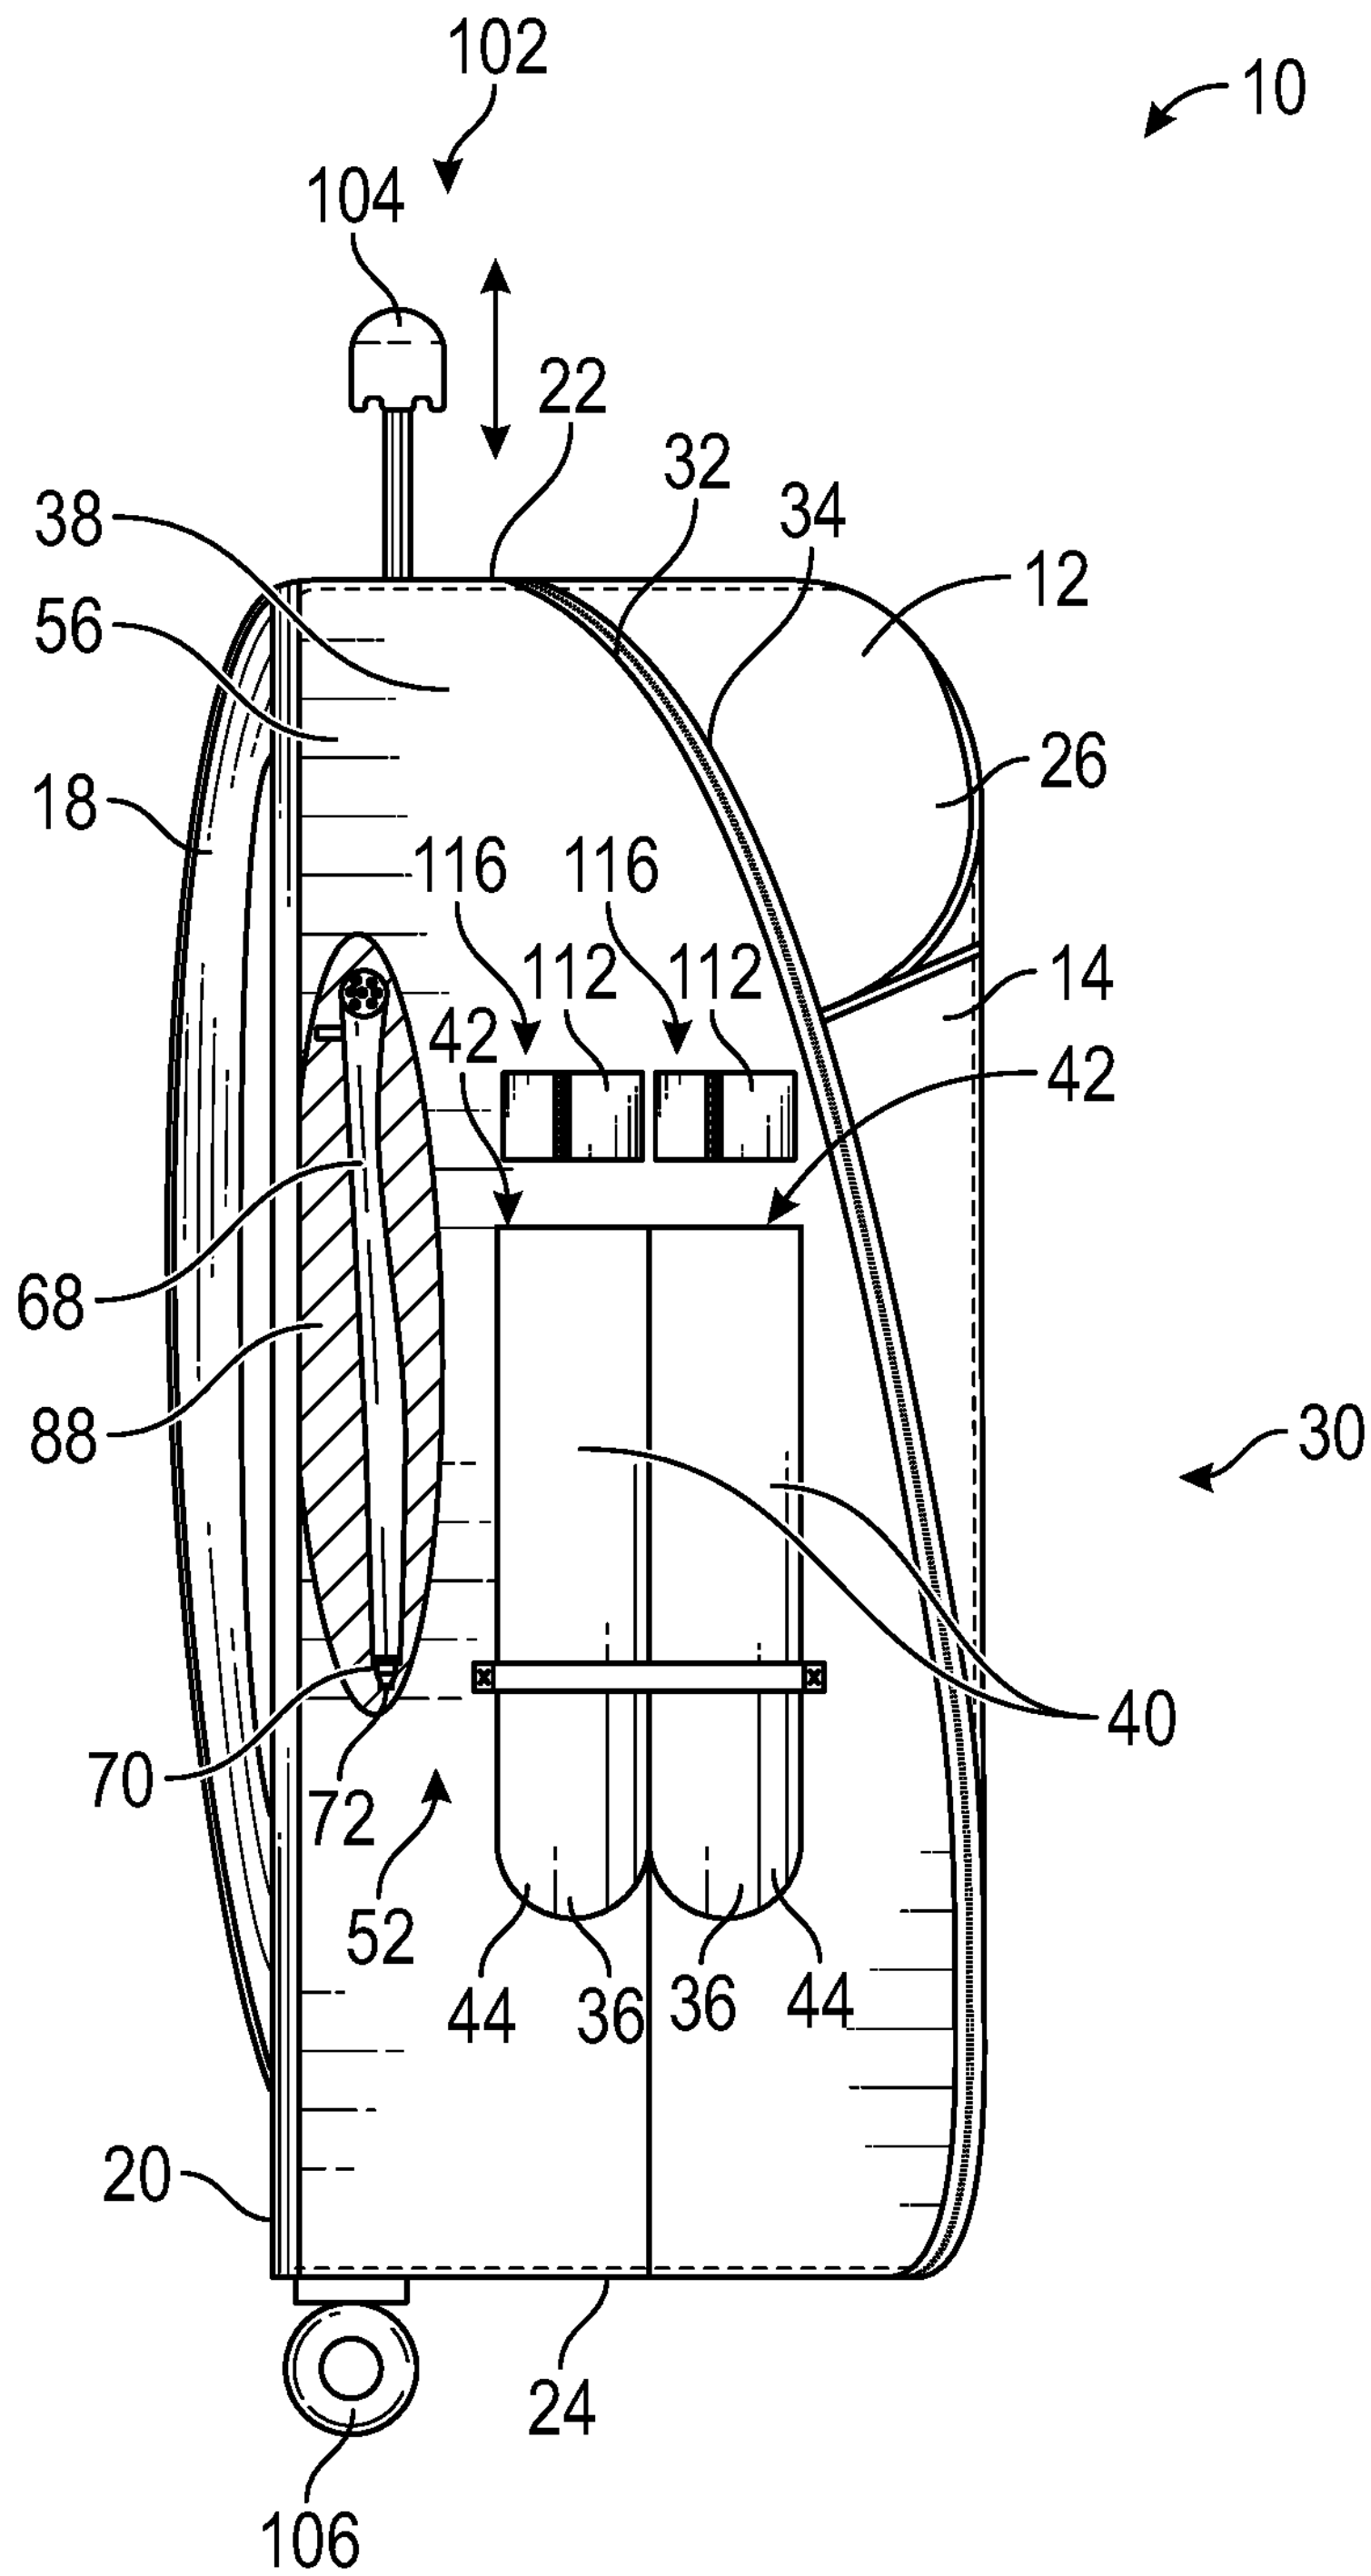
102
10
104
22
32
34
38
12
56
26
18
116
116
112
112
14
42
42
68
30
88
40
70
72
52
44
36
36
44
20
24
106

FIG. 4

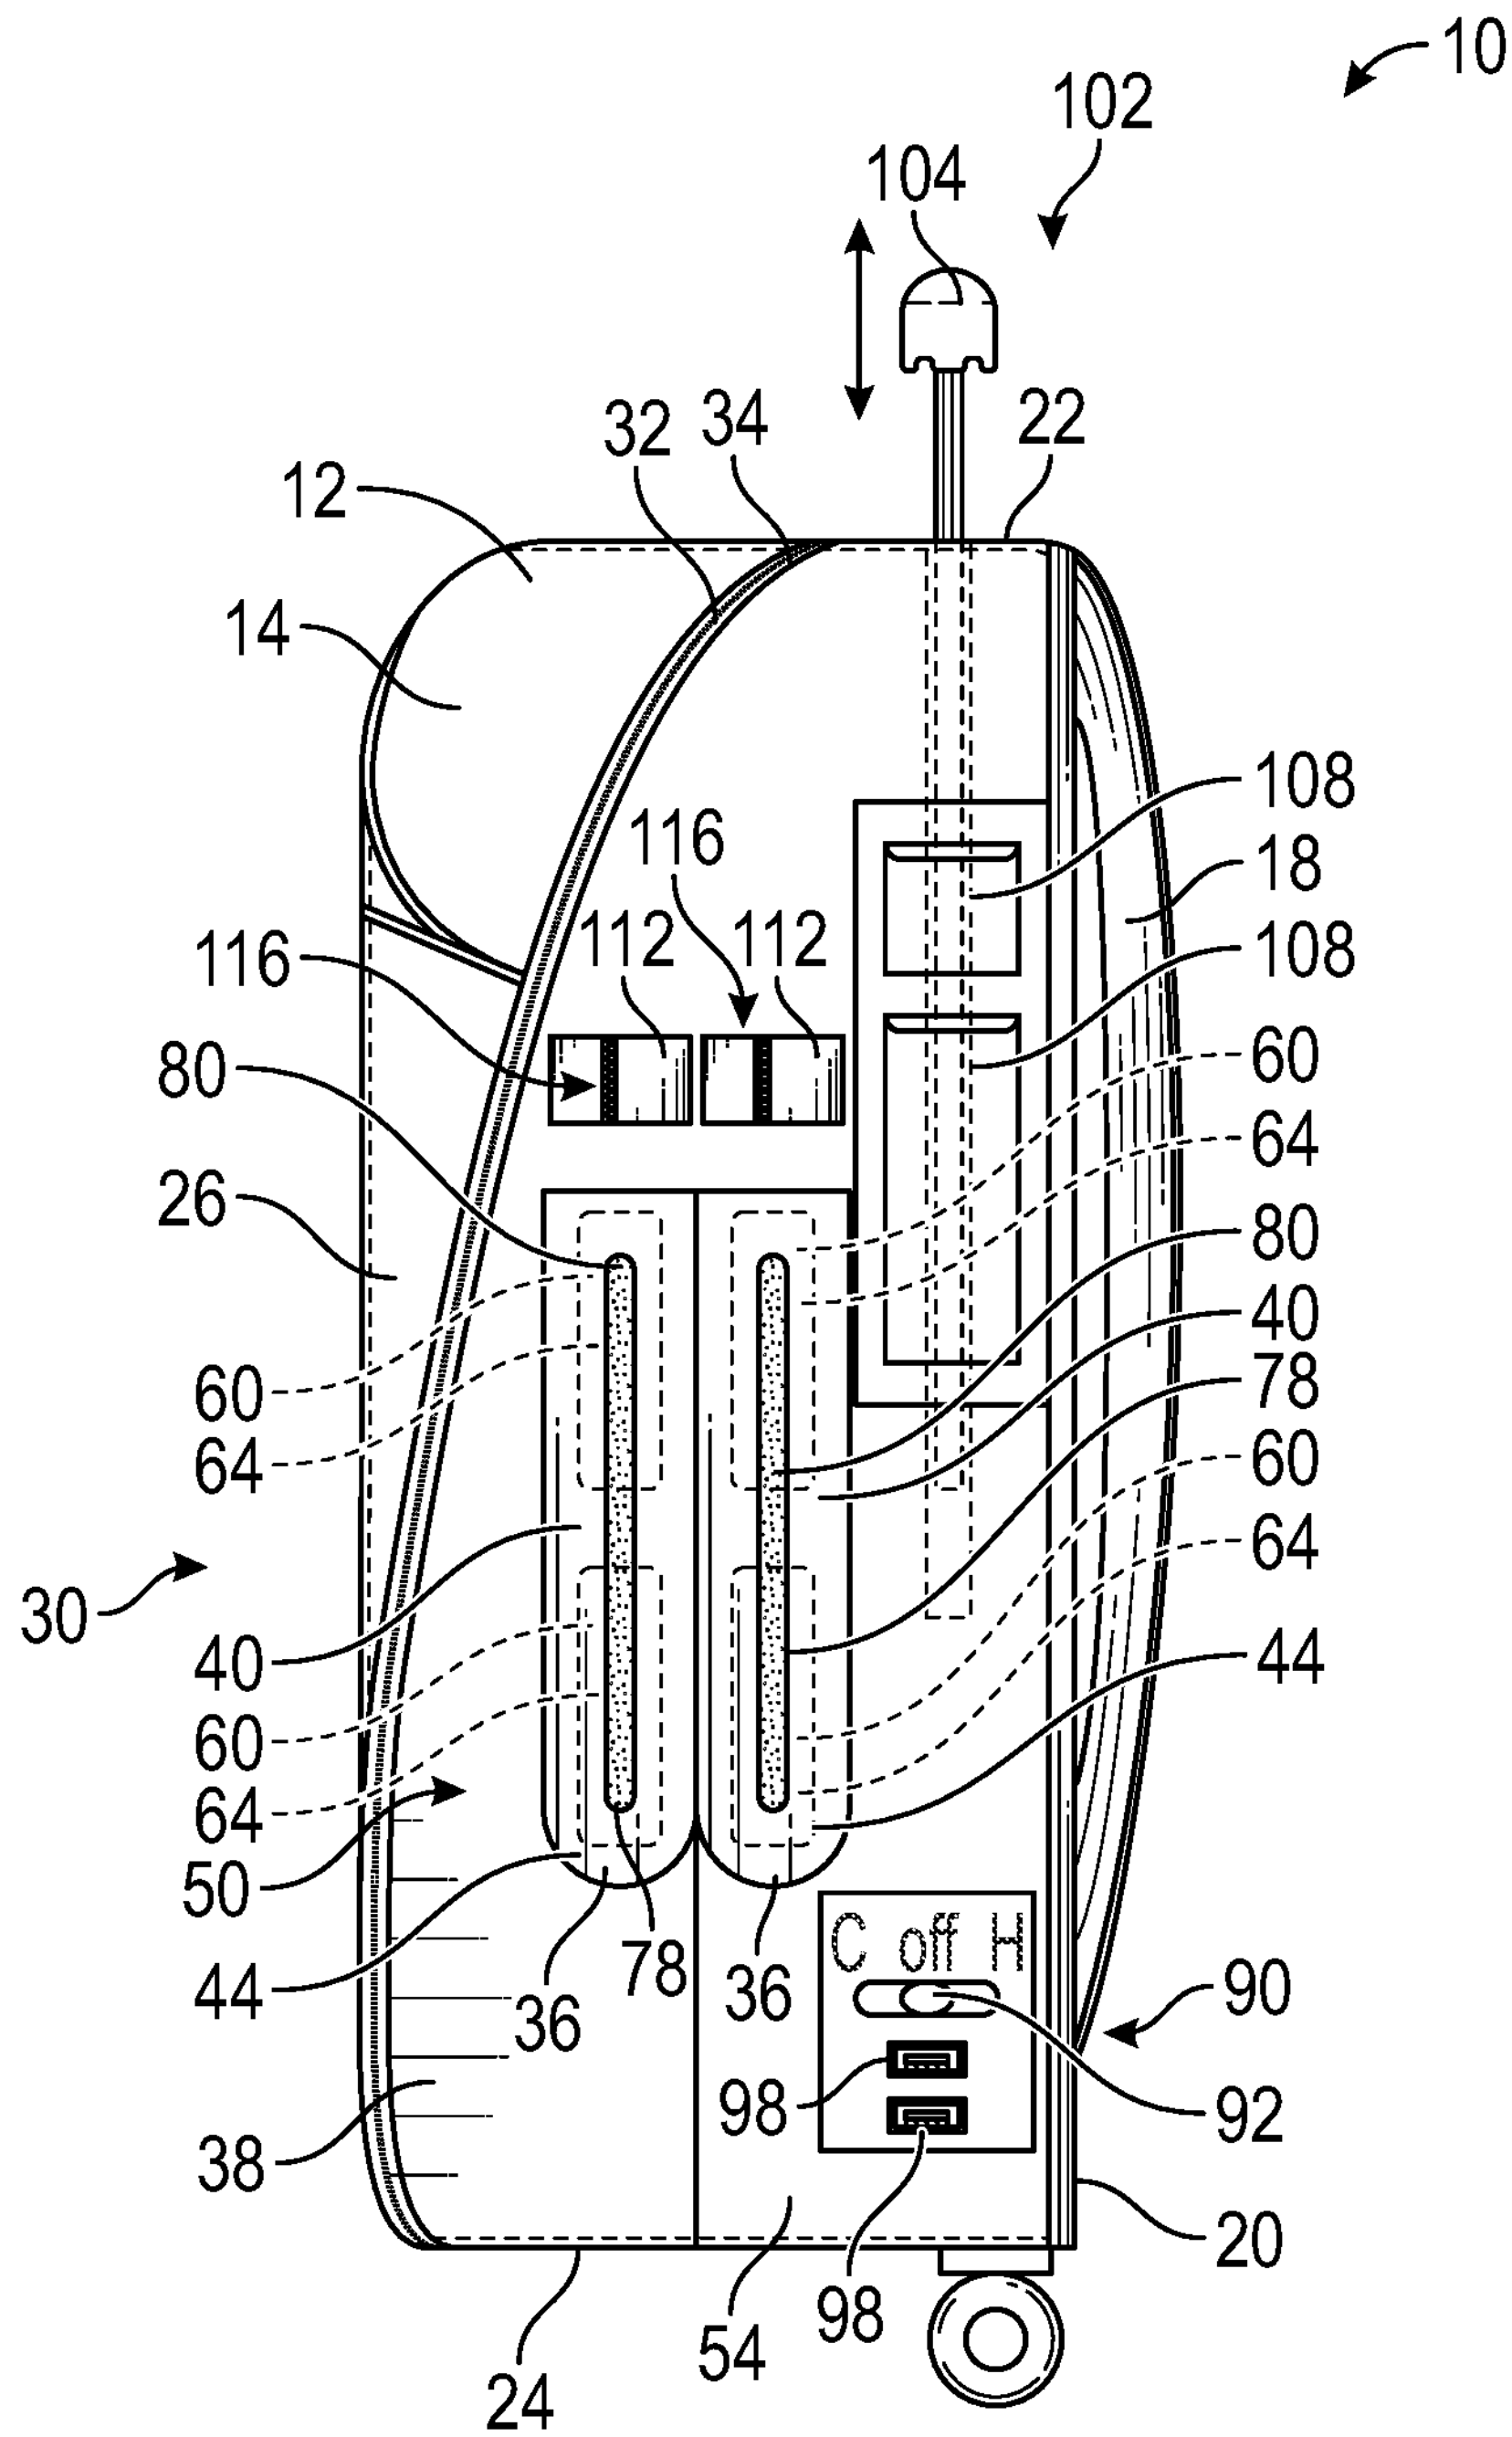
10
102
104
32
34
22
12
14
108
18
116
112
112
116
108
80
60
64
26
80
40
78
60
64
30
40
60
64
44
50
44
36
78
36
C off H
90
92
98
38
98
20
24
54
98

FIG. 5

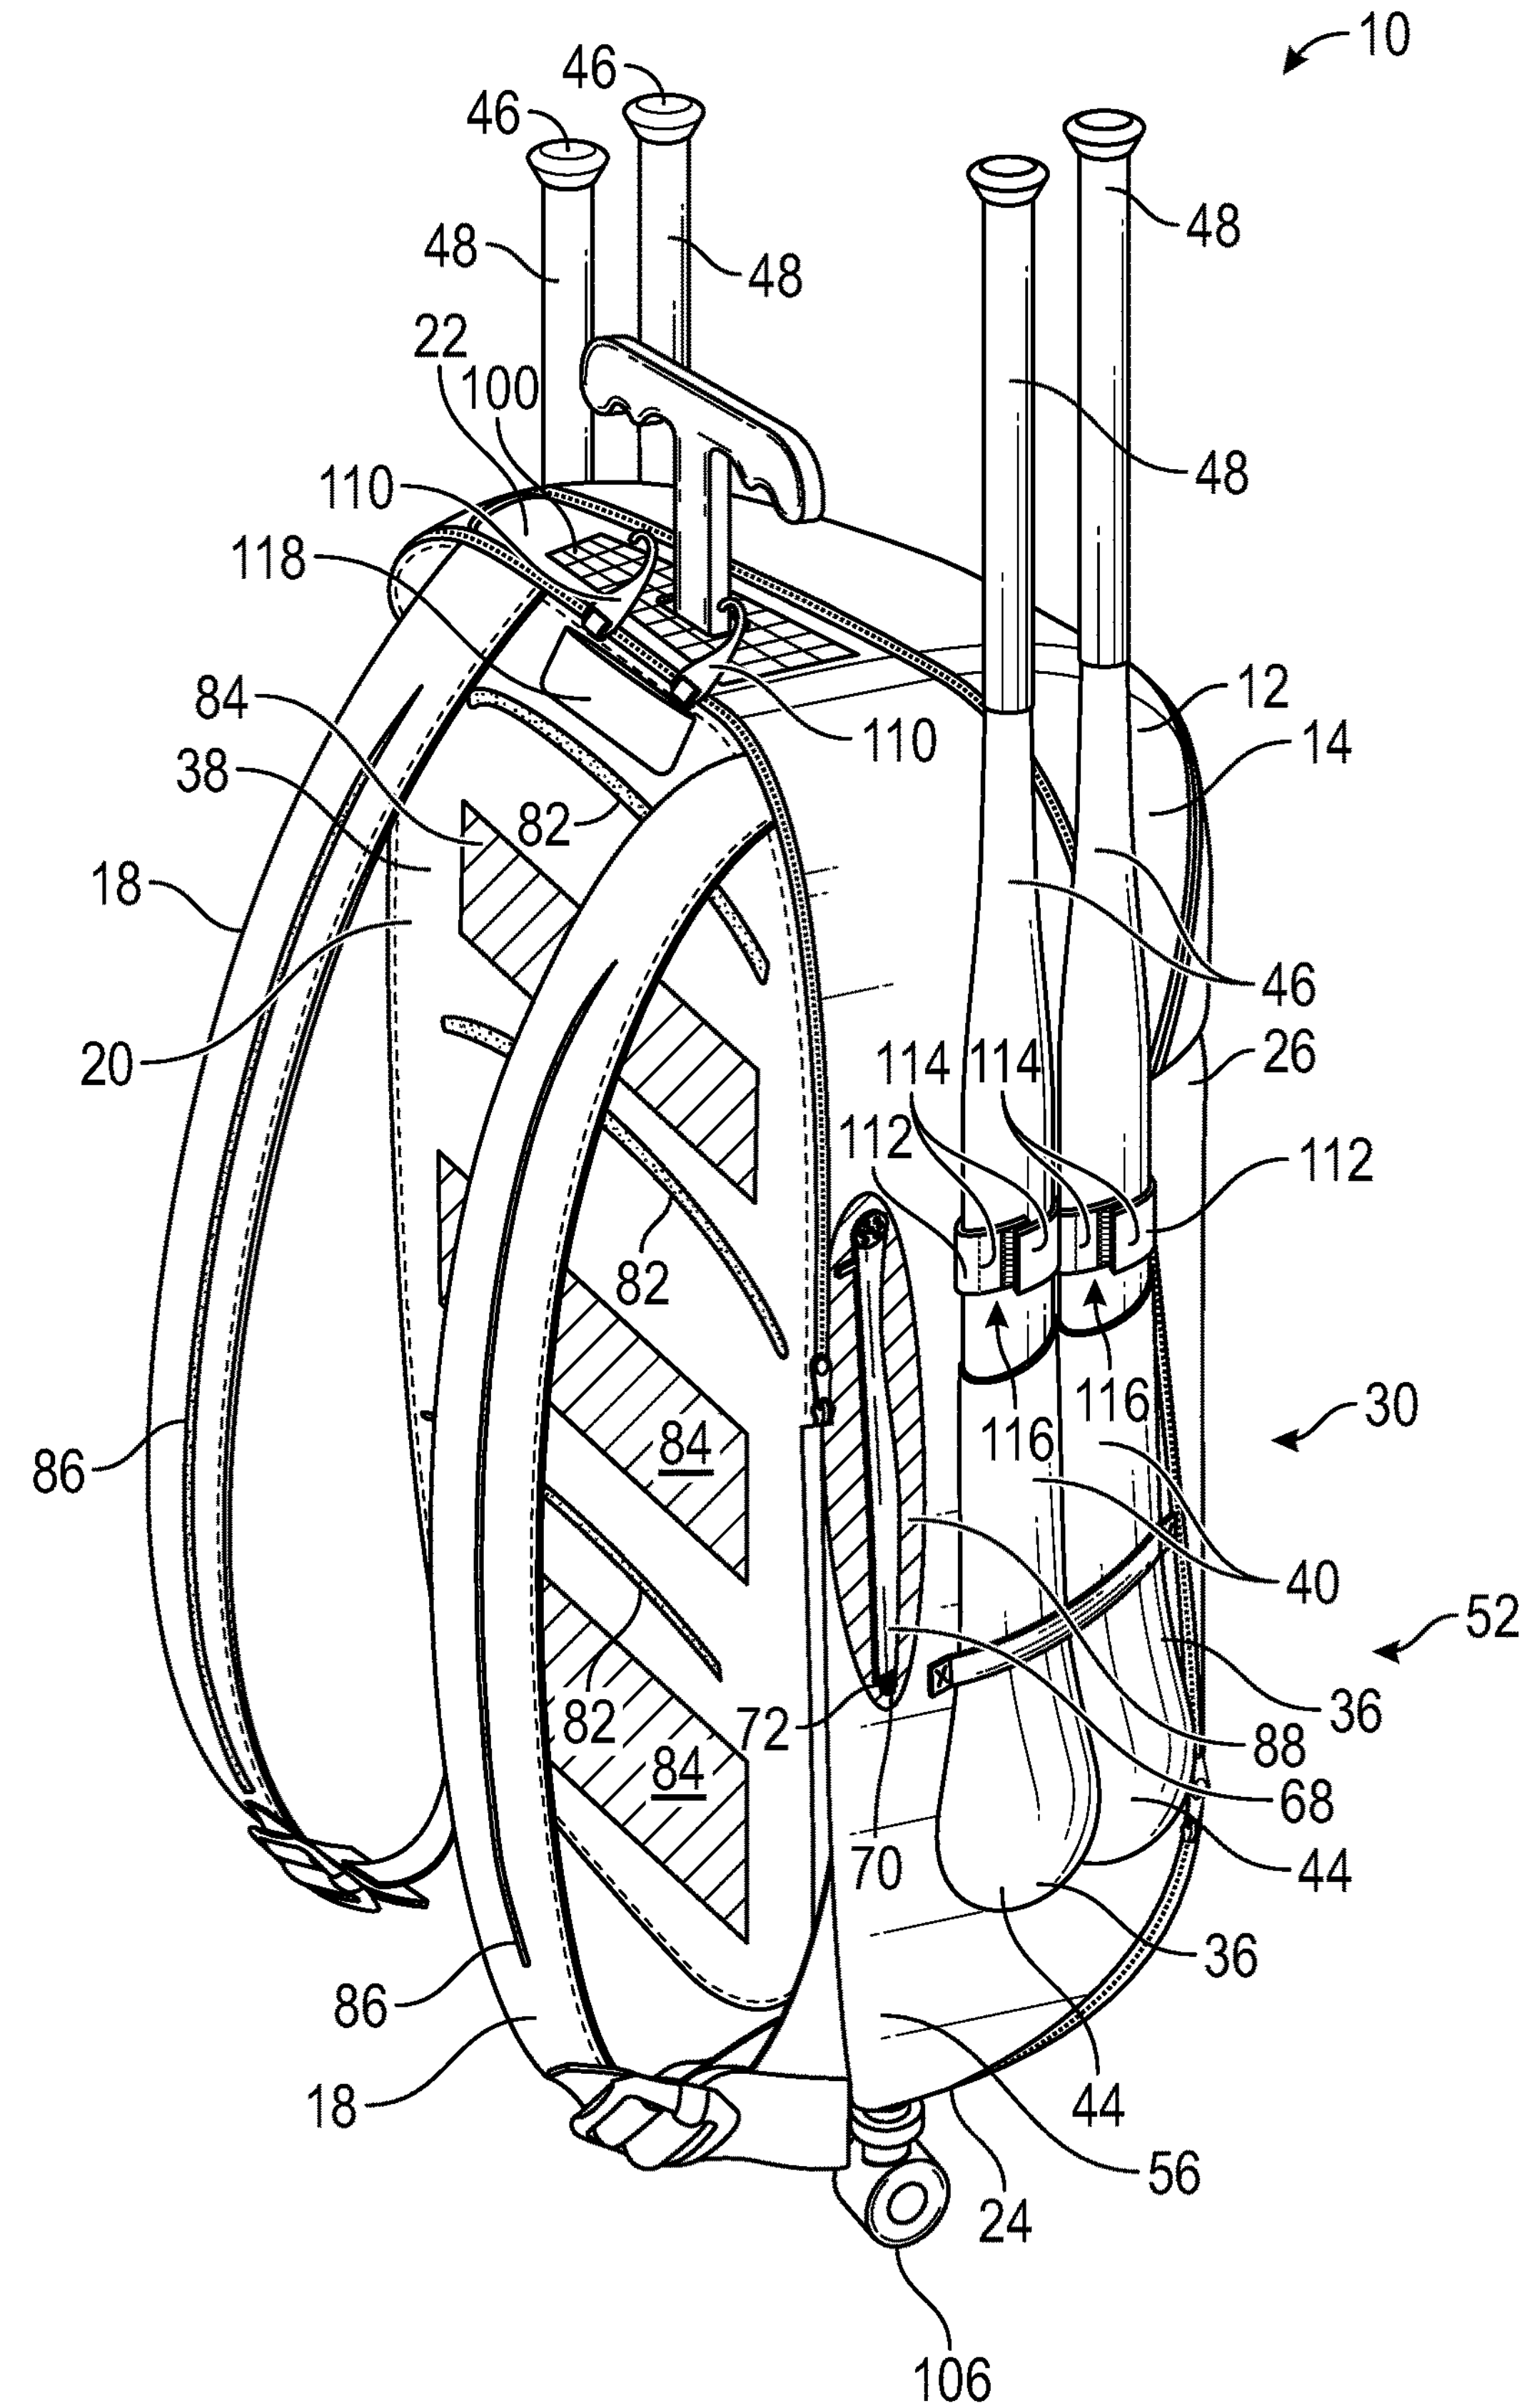
10
46
46
48
48
48
48
22
100
110
118
110
84
38
82
18
12
14
20
46
26
114
114
112
112
82
116
116
30
86
84
40
52
82
72
84
88
36
68
70
44
36
86
18
44
56
24
106

FIG. 6

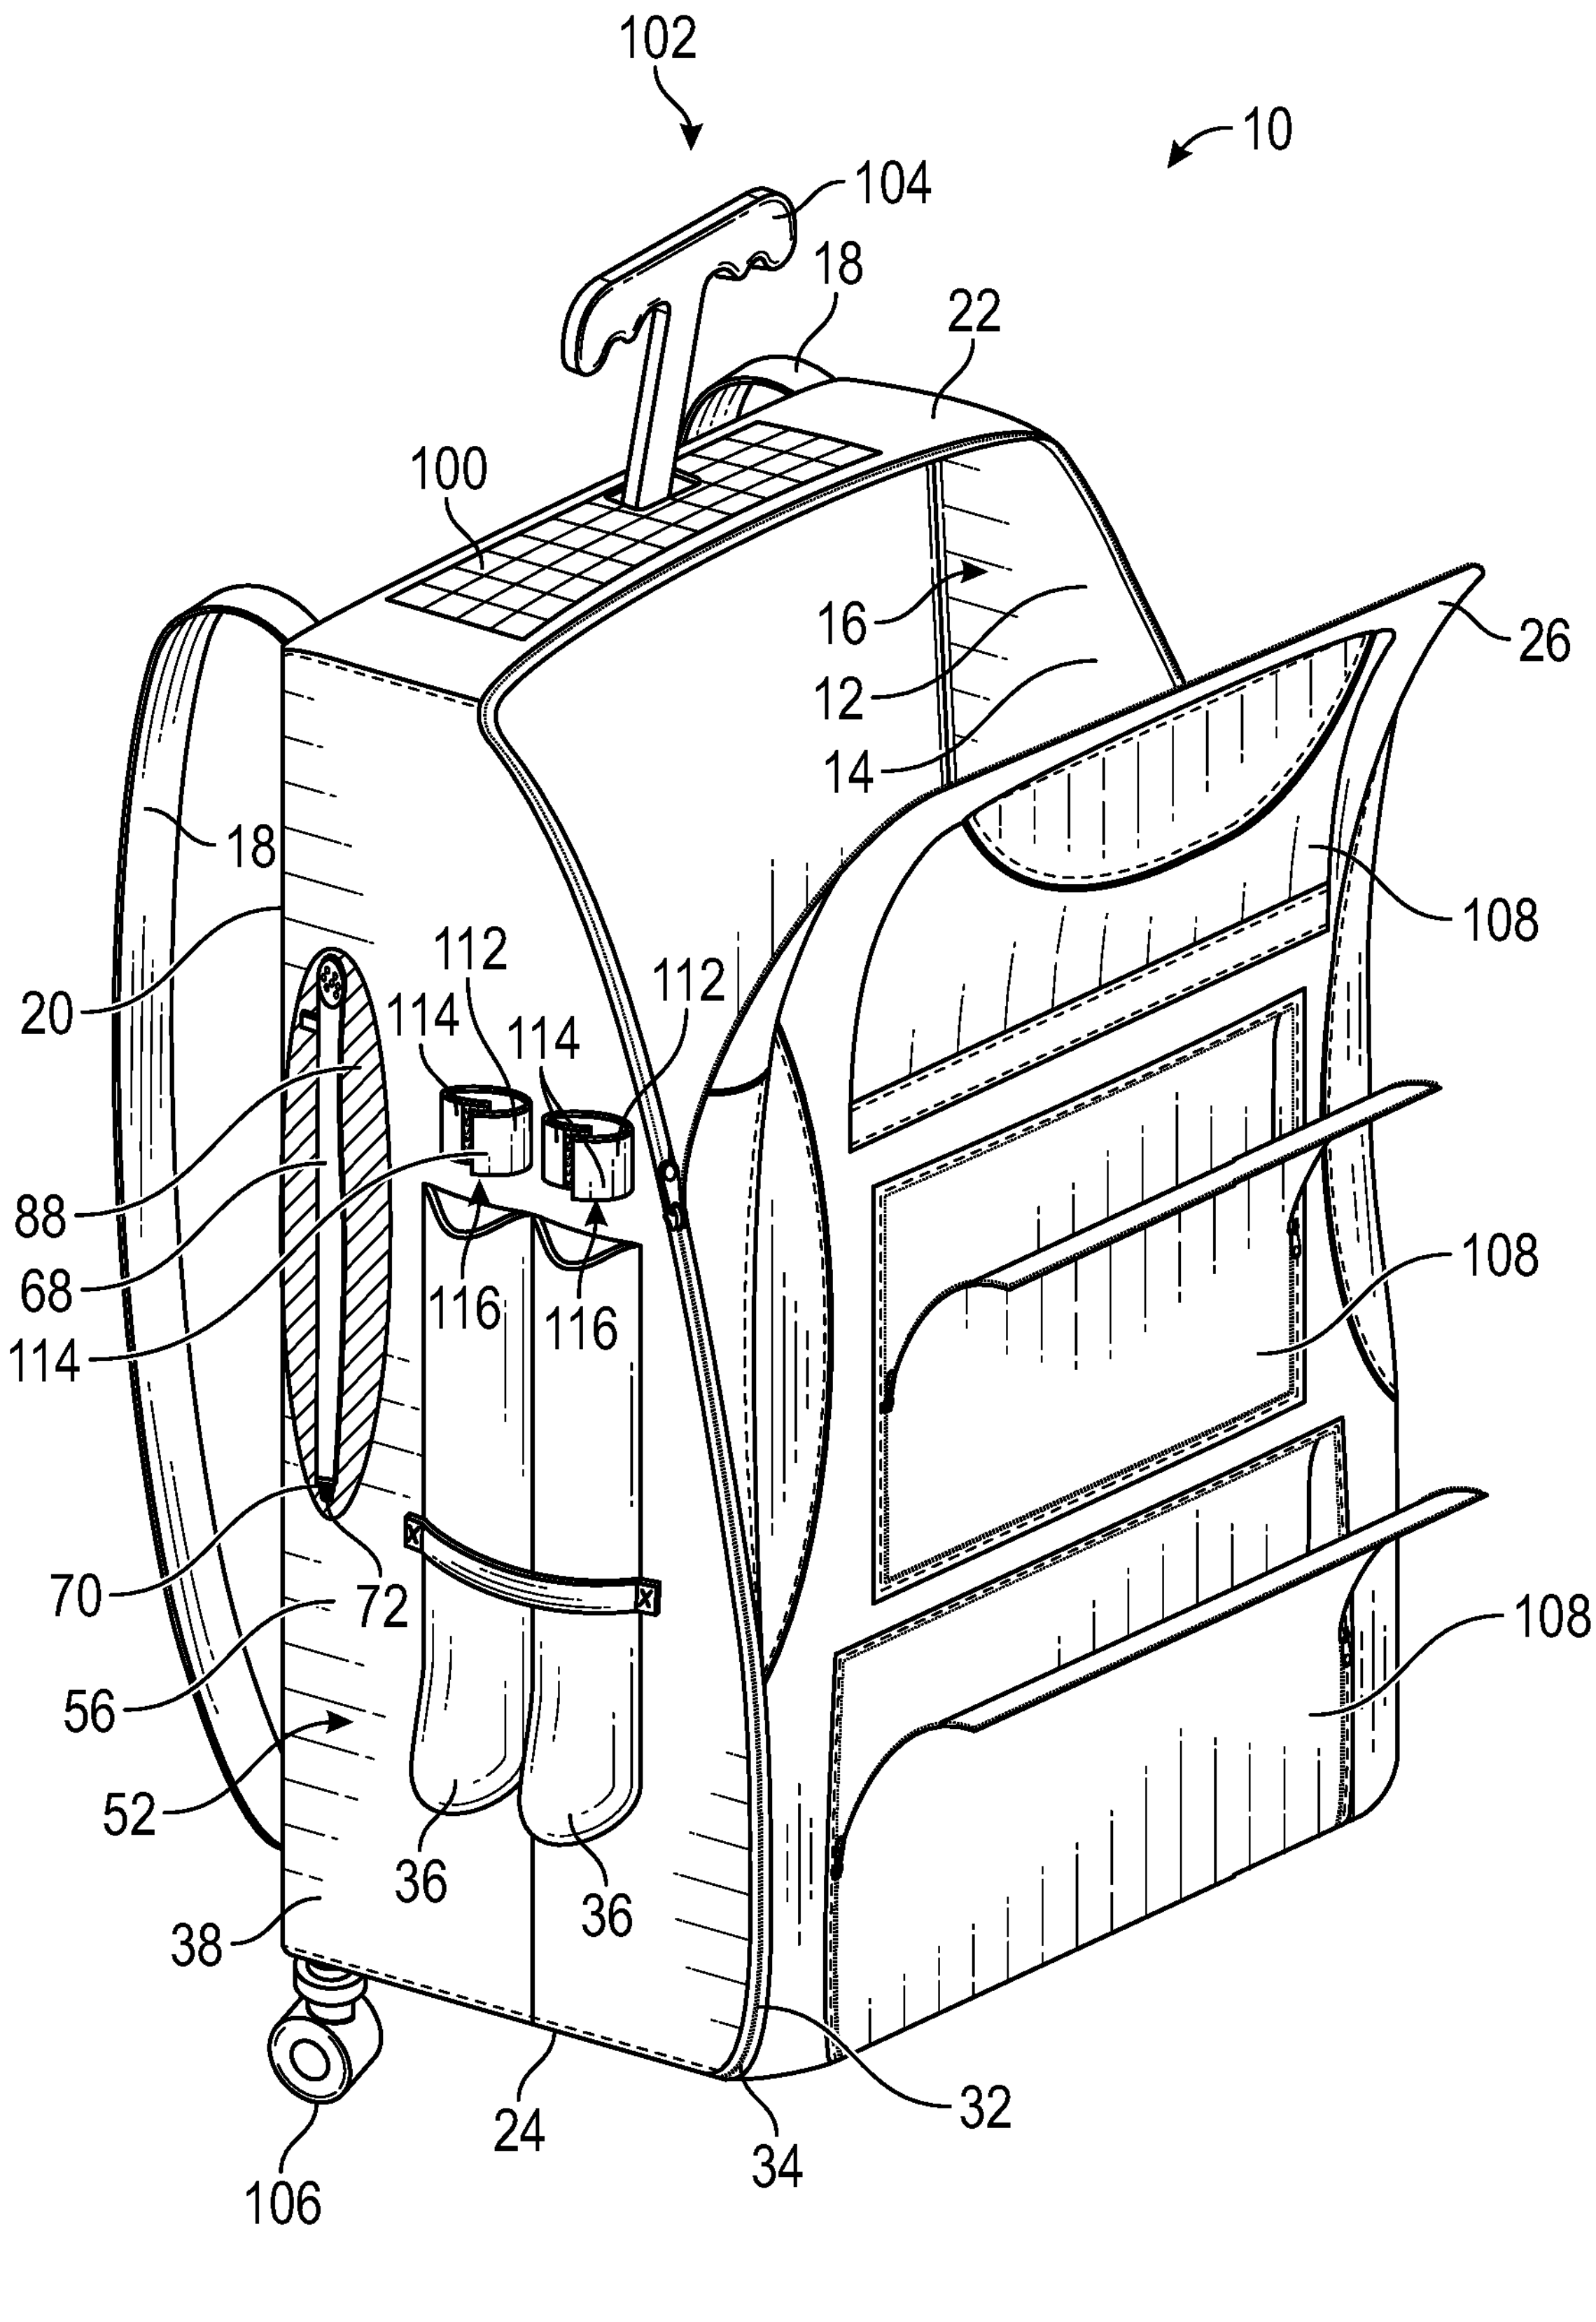
102
10
104
18
22
100
16
12
14
26
18
20
112
114
114
112
108
88
68
114
116
116
108
70
72
56
52
108
36
36
38
24
34
32
106

FIG. 7

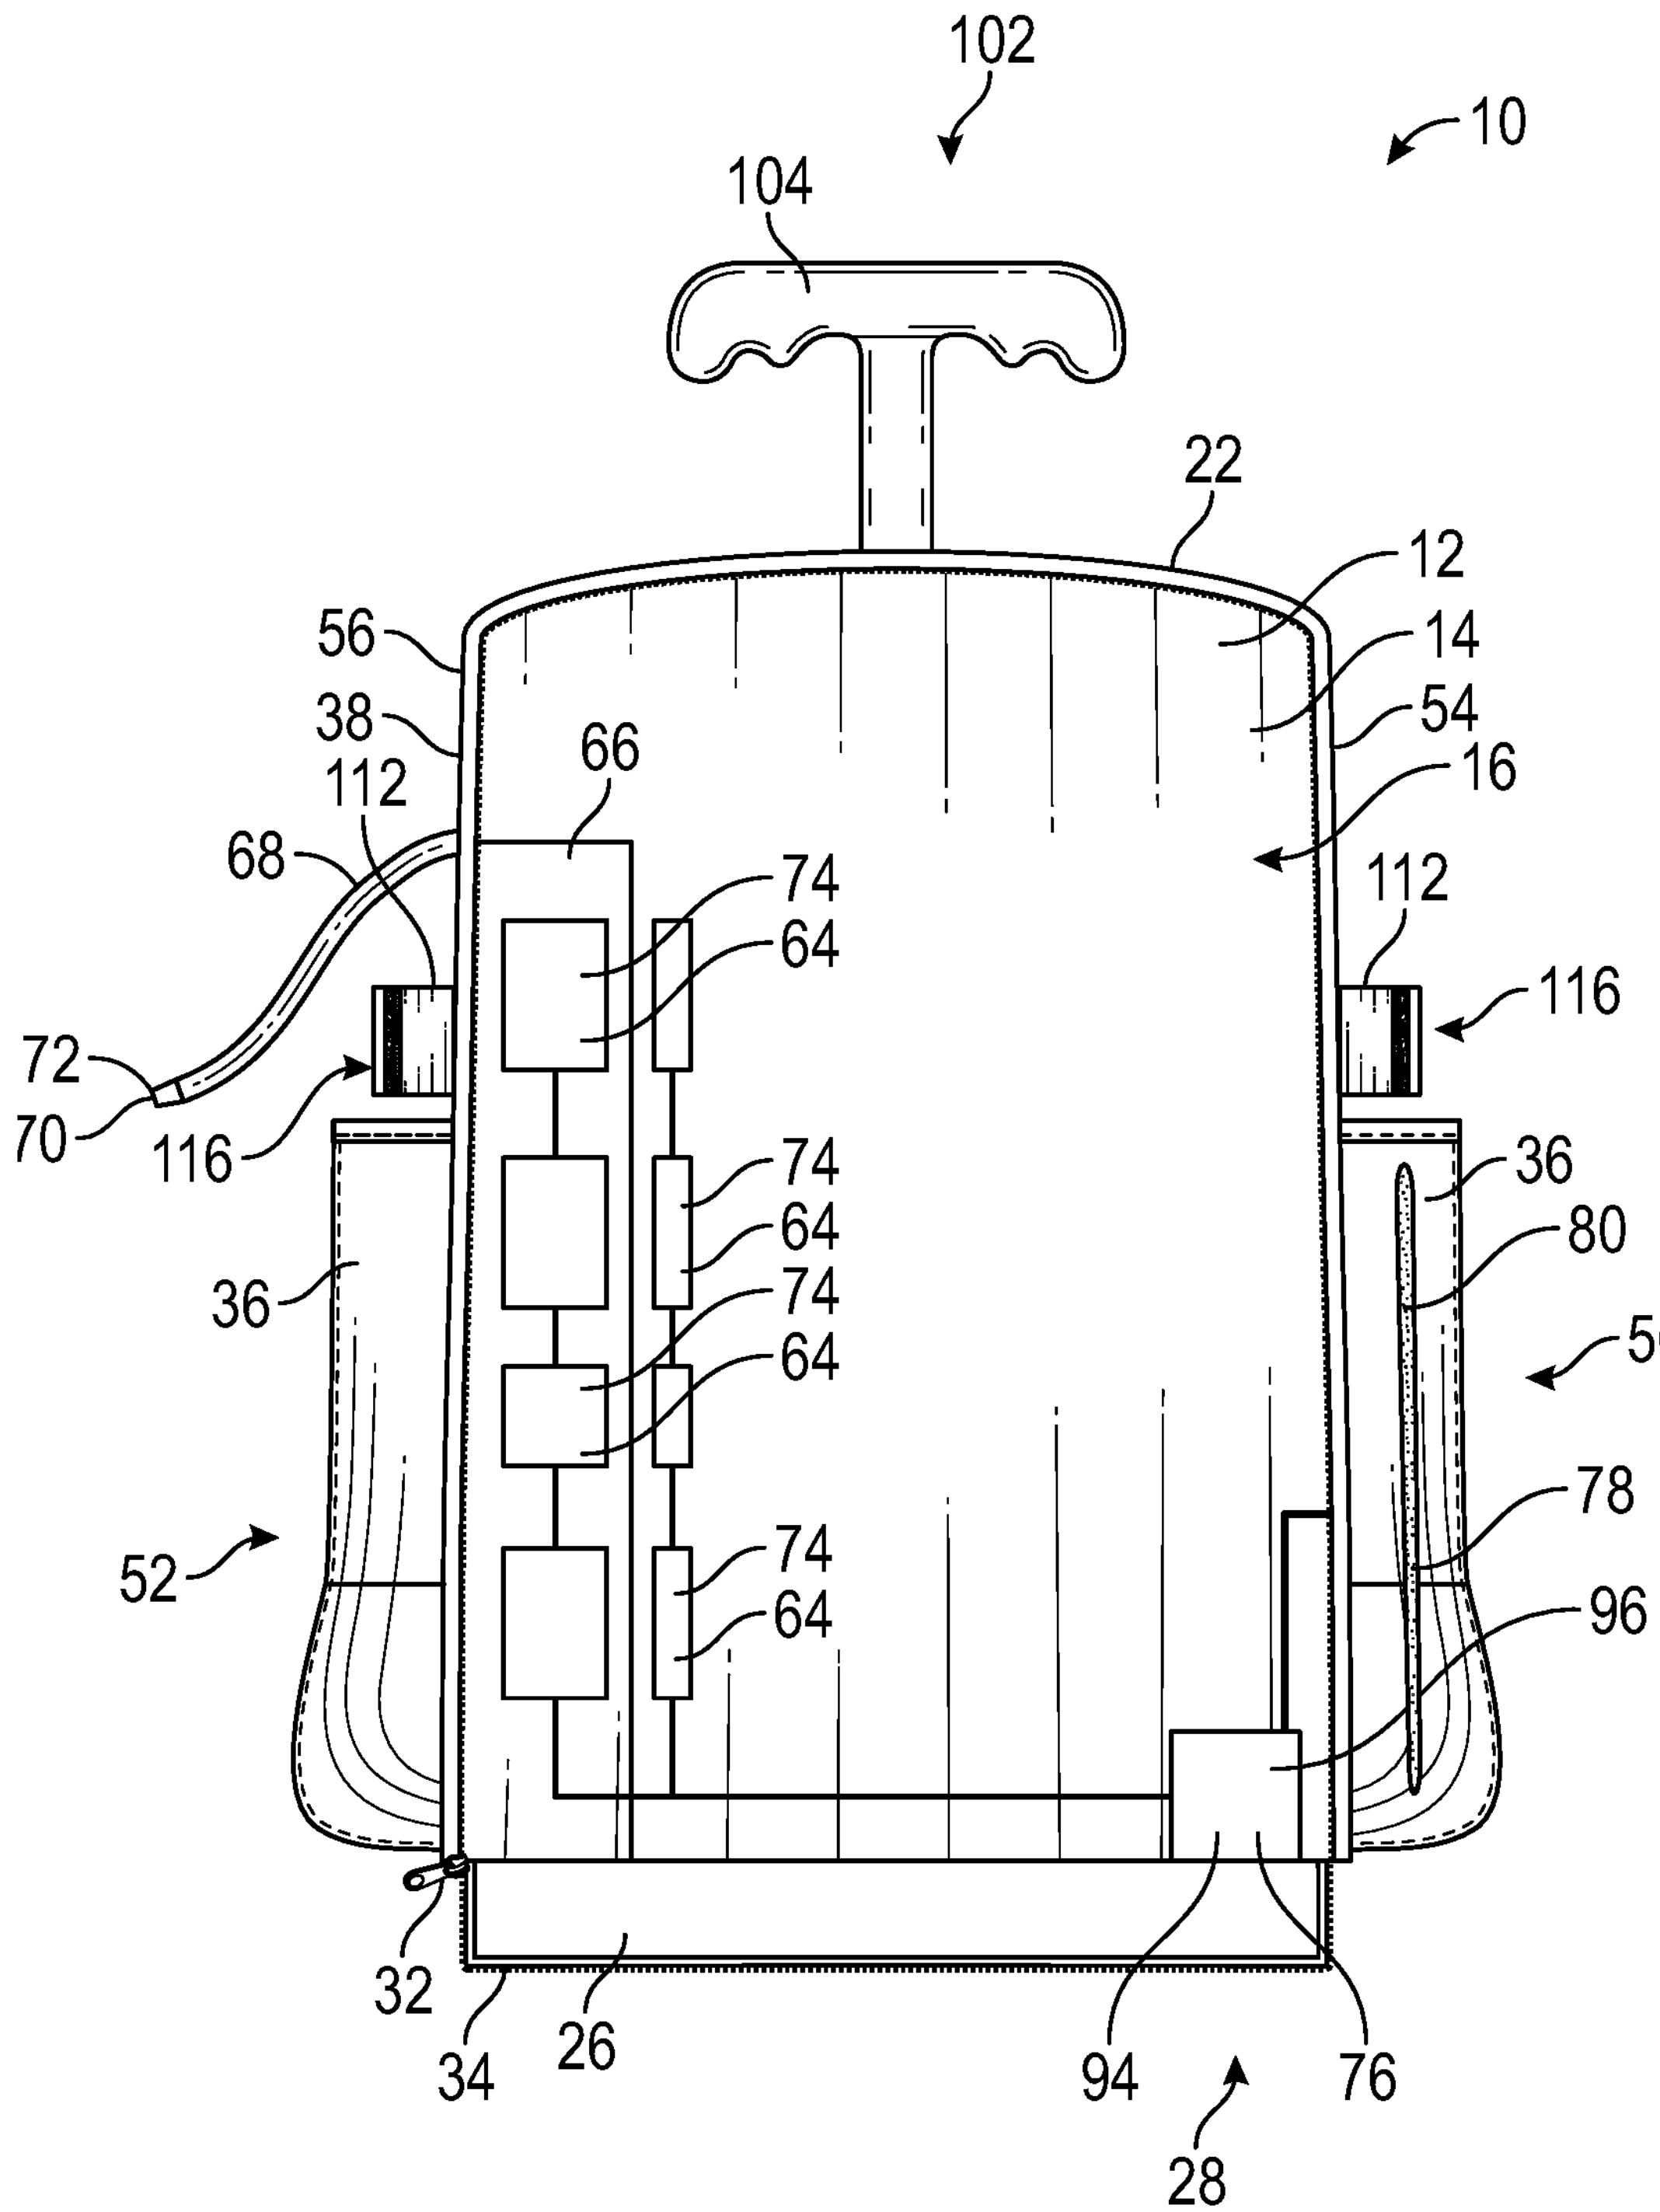
102
10
104
22
12
14
54
56
38
66
16
112
68
74
64
112
116
72
70
116
74
64
74
64
36
36
80
50
78
52
74
64
96
32
34
26
94
76
28

FIG. 8

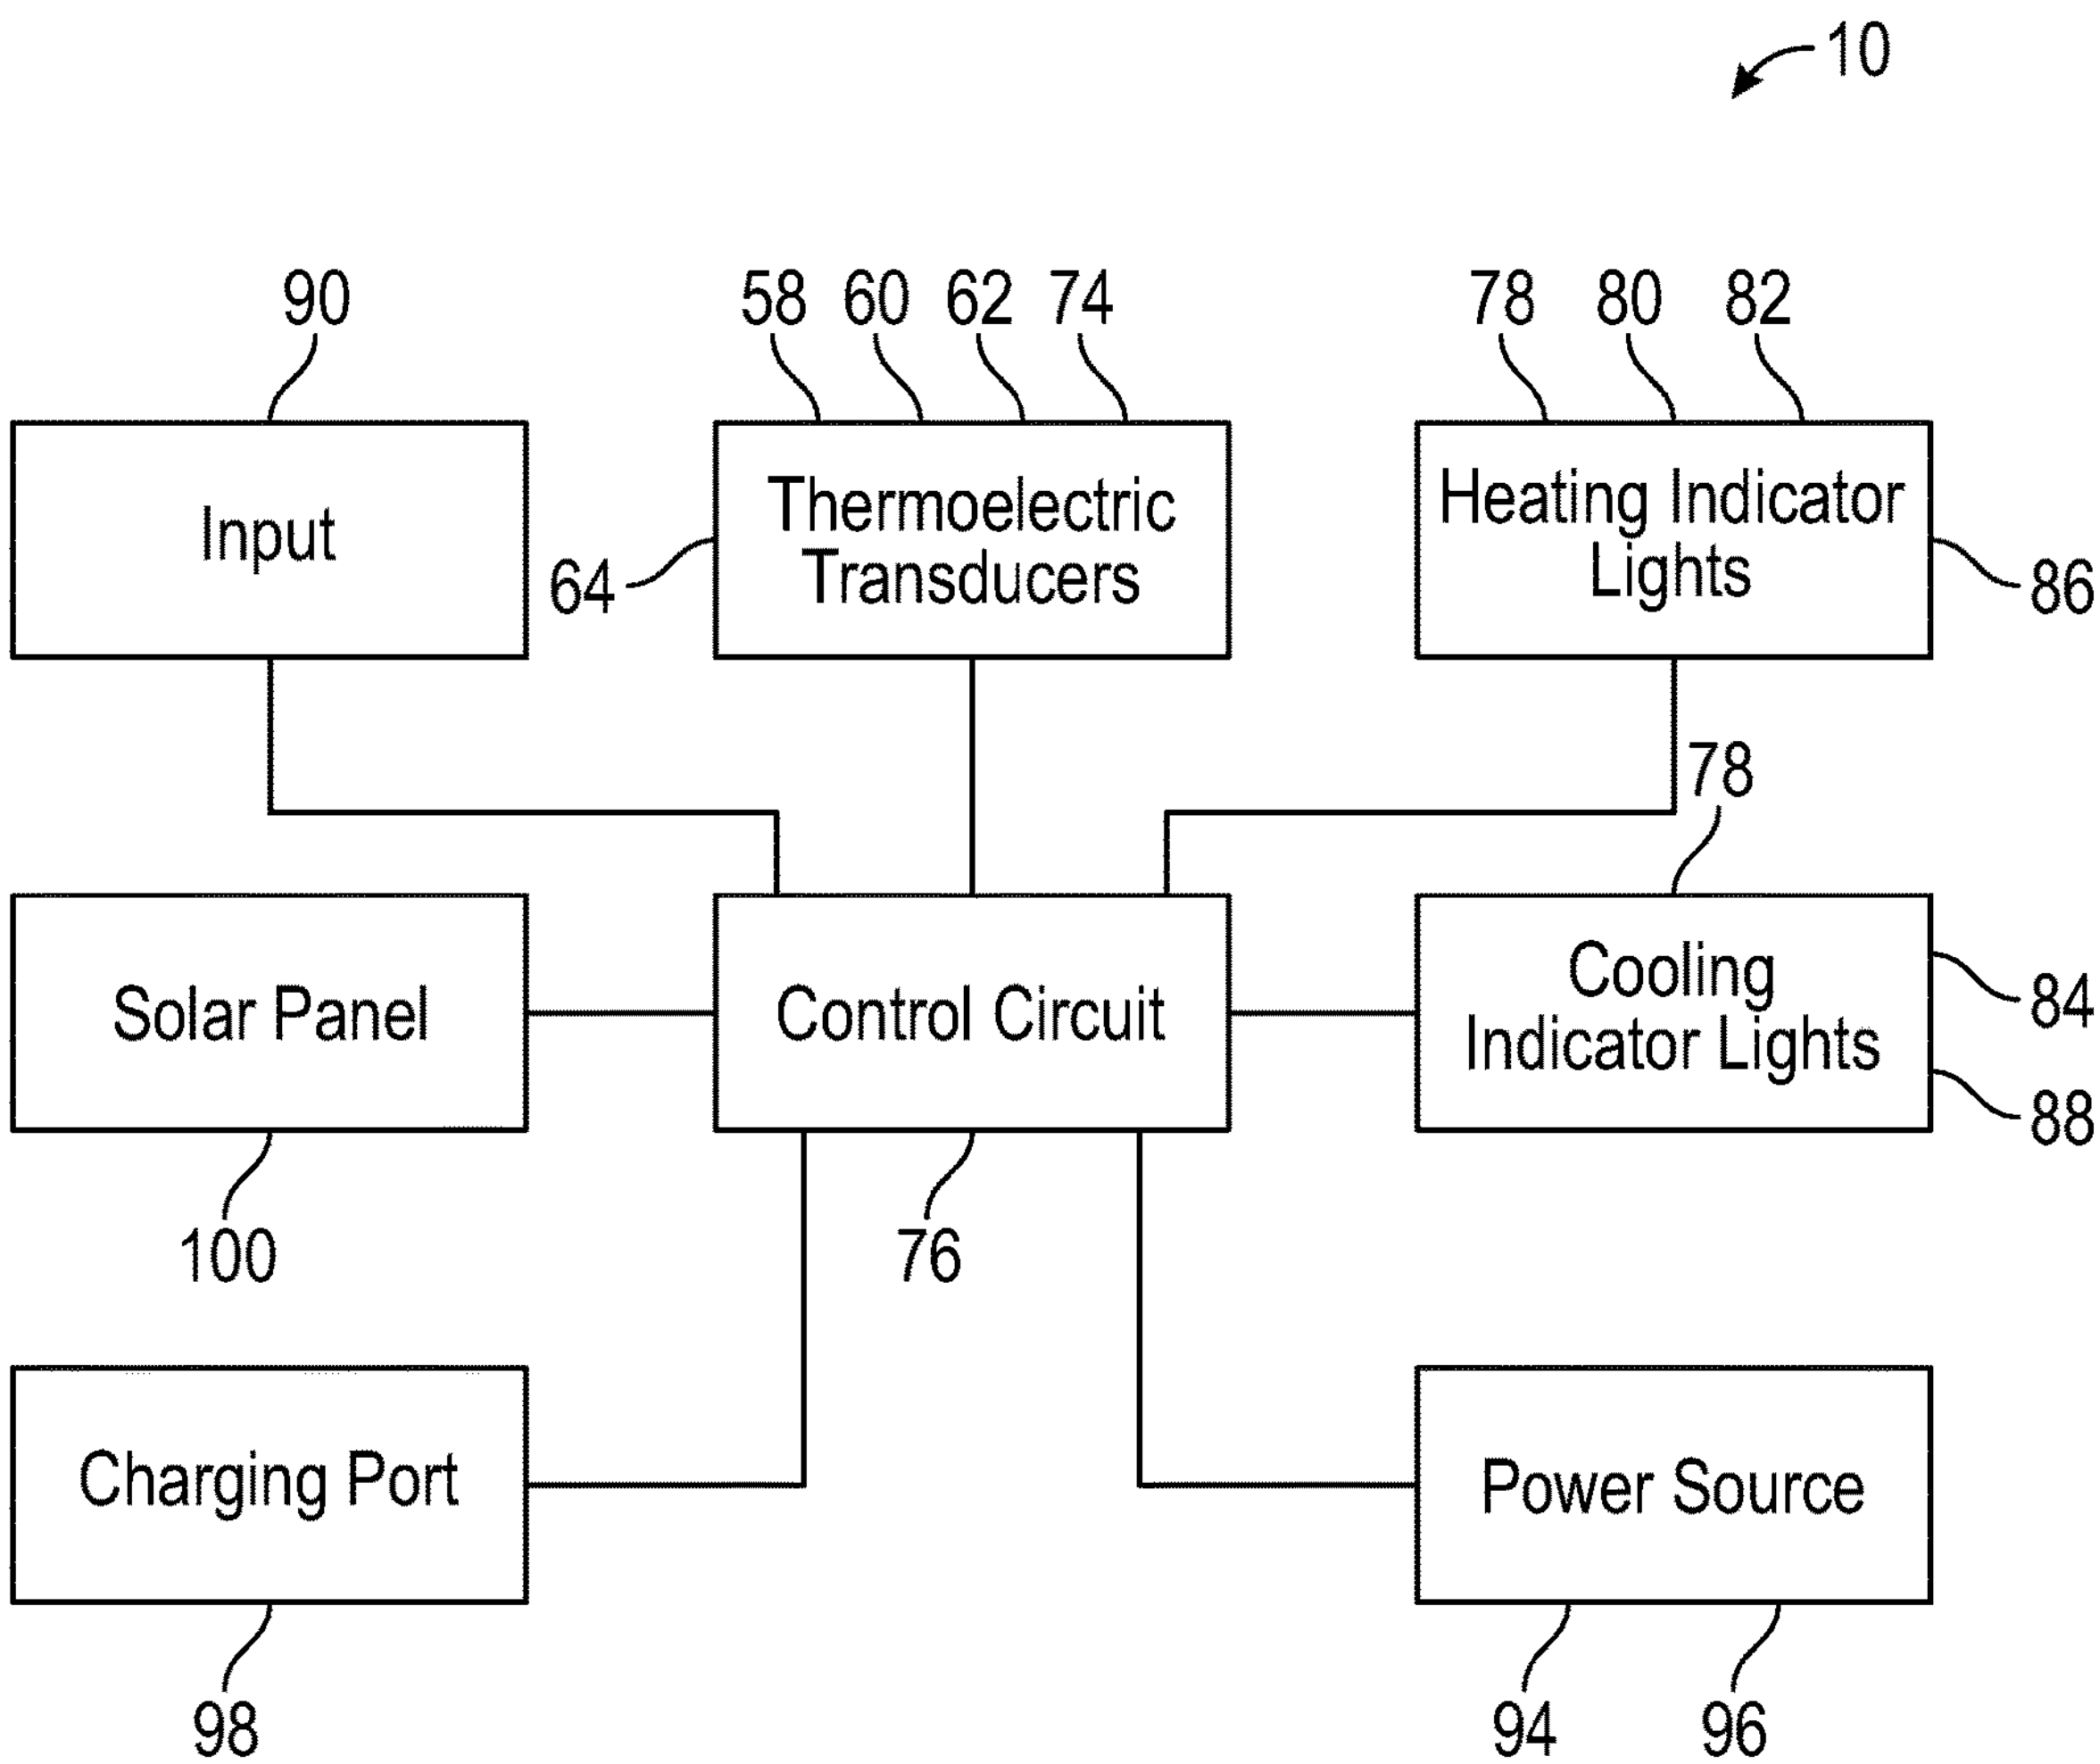
10
90
58 60 62 74
78 80 82
Input
64
Thermoelectric Transducers
Heating Indicator Lights
86
78
Solar Panel
Control Circuit
Cooling Indicator Lights
84
88
100
76
Charging Port
Power Source
98
94 96

FIG. 9

BACKPACK WITH HEATING AND COOLING ELEMENTS

CROSS-REFERENCE TO RELATED APPLICATIONS

Not Applicable

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable

THE NAMES OF THE PARTIES TO A JOINT RESEARCH AGREEMENT

Not Applicable

INCORPORATION-BY-REFERENCE OF MATERIAL SUBMITTED ON A COMPACT DISC OR AS A TEXT FILE VIA THE OFFICE ELECTRONIC FILING SYSTEM

Not Applicable

(f) STATEMENT REGARDING PRIOR DISCLOSURES BY THE INVENTOR OR JOINT INVENTOR

Not Applicable

BACKGROUND OF THE INVENTION

(1) Field of the Invention

The disclosure relates to sports equipment bags and more particularly pertains to a new sports equipment bag for storing baseball bats and selectively heating and cooling parts of the bag.

(2) Description of Related Art Including Information Disclosed Under 37 CFR 1.97 and 1.98

The prior art relates to sports equipment bags including various means for heating or cooling contents of the bag such as baseball bats. The prior art collectively fails to address a sports equipment bag for selectively heating baseball bats while selectively heating and cooling a back side of the back for the comfort of a user.

BRIEF SUMMARY OF THE INVENTION

An embodiment of the disclosure meets the needs presented above by generally comprising a body having an outer shell which defines an interior space. A carrying strap is coupled to and extends outwardly from the body. The carrying strap extends from a back side of the body adjacent to a top side of the body to the back side of the body adjacent to a bottom side of the body. A bat sleeve is coupled to an outer surface of the body and comprises a tubular panel. The bat sleeve also has an open top and a closed bottom and is configured for holding a baseball bat. A bat heater is coupled to the bat sleeve and selectively heats the bat sleeve. A back heater cooler is coupled to the back side of the body. The back heater cooler selectively heats and selectively cools the outer surface of the body across the back side. A control circuit is coupled to the body and is positioned within the interior space. The control circuit is electrically coupled to the bat heater and the back heater cooler.

There has thus been outlined, rather broadly, the more important features of the disclosure in order that the detailed description thereof that follows may be better understood, and in order that the present contribution to the art may be better appreciated. There are additional features of the disclosure that will be described hereinafter and which will form the subject matter of the claims appended hereto.

The objects of the disclosure, along with the various features of novelty which characterize the disclosure, are pointed out with particularity in the claims annexed to and forming a part of this disclosure.

BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWING(S)

The disclosure will be better understood and objects other than those set forth above will become apparent when consideration is given to the following detailed description thereof. Such description makes reference to the annexed drawings wherein:

FIG. **1** is a top back side perspective view of a heating and cooling backpack apparatus according to an embodiment of the disclosure.

FIG. **2** is a front view of an embodiment of the disclosure.

FIG. **3** is a back view of an embodiment of the disclosure.

FIG. **4** is a second side view of an embodiment of the disclosure.

FIG. **5** is a first side view of an embodiment of the disclosure.

FIG. **6** is a perspective in-use view of an embodiment of the disclosure.

FIG. **7** is a top front side perspective view of an embodiment of the disclosure.

FIG. **8** is a front view of an embodiment of the disclosure with a front panel in an open position.

FIG. **9** is a block diagram of an embodiment of the disclosure.

DETAILED DESCRIPTION OF THE INVENTION

With reference now to the drawings, and in particular to FIGS. **1** through **9** thereof, a new sports equipment bag embodying the principles and concepts of an embodiment of the disclosure and generally designated by the reference numeral **10** will be described.

As best illustrated in FIGS. **1** through **9**, the heating and cooling backpack apparatus **10** generally comprises a body **12** having an outer shell **14** which defines an interior space **16**. Each of a pair of carrying straps **18** is coupled to and extends outwardly from the body **12**. Each carrying strap **18** extends from a back side **20** of the body **12** adjacent to a top side **22** of the body **12** to the back side **20** adjacent to a bottom side **24** of the body **12**. A front panel **26** of the outer shell **14** is movable between an open position **28** which exposes the interior space **16** and a closed position **30** which covers the interior space **16**. A fastener **32** such as a zipper **34**, hook-and-loop connector, latch, or the like releasably secures the front panel **26** in the closed position **30**.

Each of a plurality of bat sleeves **36** is coupled to an outer surface **38** of the body **12**. Each bat sleeve **36** comprises a tubular panel **40** and has an open top **42** and a closed bottom **44**. Each bat sleeve **36** is configured for holding a baseball bat **46** such that the baseball bat **46** extends upwardly from the bat sleeve **36** and a bat handle **48** of the baseball bat **46** is positioned distally from the bat sleeve **36**. The term "baseball bat" as used in the specification and the claims includes softball bats, cricket bats, and like sports equipment. The plurality of bat sleeves **36** includes a first pair **50** of bat sleeves **36** and a second pair **52** of bat sleeves **36**. Each bat sleeve **36** of the first pair **50** of bat sleeves **36** is positioned on a first lateral side **54** of the body **12**. Each bat sleeve **36** of the second pair **52** of bat sleeves **36** is positioned on a second lateral side **56** of the body **12**.

Each of a pair of bat heaters **58** is coupled to an associated bat sleeve **36** of the first pair **50** of bat sleeves **36**. Each bat heater **58** is coupled to the tubular panel **40** of the associated bat sleeve **36** and may be embedded within the tubular panel **40** of the associated bat sleeve **36**. Each bat heater **58** selectively heats the associated bat sleeve **36**. A back heater cooler **60** is coupled to the back side **20** of the body **12**. The back heater cooler **60** is embedded within the outer shell **14**, selectively heating and selectively cooling the outer surface **38** of the body **12** across the back side **20**. Each of a pair of strap heaters **62** is coupled to an associated carrying strap **18** of the plurality of carrying straps **18**, and each strap heater **62** selectively heats the associated carrying strap **18**. The bat heaters **58** and the strap heaters **62** comprise thermoelectric heat pumps **64** but may comprise electric resistance heaters or the like.

The back heater cooler **60** also comprises a thermoelectric heat pump **64** which operates to pump heat toward or away from the outer surface **38** of the body **12** to heat or cool the outer surface **38** respectively. The back heater cooler **60** may alternatively comprise separate elements for heating and cooling. For example, the back heater cooler **60** may comprise an electric resistance heater for heating the outer surface **38** and a refrigeration system for cooling it. Alternatively, the back heater cooler **60** may comprise an air circulation system for cooling the outer surface **38** which urges one of ambient air and air contained within the body **12** against the body **12** to cool the outer surface **38**. This arrangement would cool the outer surface **38** when the outer surface **38** has a temperature greater than a temperature of the air urged against the outer surface **38**, including, for example, when a user warms the outer surface **38** with their body **12** heat.

A drink reservoir **66** configured for containing a fluid is coupled to the body **12** and is positioned within the interior space **16**. A hose **68** is in fluid communication with the drink reservoir **66**. The hose **68** extends through the outer shell **14** of the body **12** and outwardly from the body **12**. The hose **68** has a nozzle **70** on a free end **72** of the hose **68** for dispensing the fluid. A reservoir cooler **74** is coupled to the drink reservoir **66** and selectively cools the drink reservoir **66**. The reservoir cooler **74** is configured for selectively cooling the fluid when the fluid is contained within the drink reservoir **66**. The reservoir cooler **74** comprises a thermoelectric heat pump **64** but may comprise a refrigeration system, an air circulation system similar to what is described above for the back heater cooler **60**, or the like.

A control circuit **76** is coupled to the body **12** and is positioned within the interior space **16**. The control circuit **76** is electrically coupled to each bat heater **58**, the back heater cooler **60**, each strap heater **62**, and the reservoir cooler **74**. Each of a plurality of indicator light emitters **78** is electrically coupled to the control circuit **76**. Each indicator light emitter **78** is configured to emit light away from the body **12** when activated. The plurality of indicator light emitters **78** includes a pair of bat heating indicators **80**, a back heating indicator **82**, a back cooling indicator **84**, a pair of strap heating indicators **86**, and a reservoir cooling indicator **88**.

Each bat heating indicator **80** is coupled to a respective bat sleeve **36** of the first pair **50** of bat sleeves **36**. Each bat heating indicator **80** activates when the respective bat sleeve **36** is being heated by the bat heater **58** associated with the respective bat sleeve **36**. The back heating indicator **82** is coupled to the back side **20** of the body **12** and activates when the back heater cooler **60** is heating the outer surface **38** of the body **12**. The back cooling indicator **84** is coupled to the back side **20** of the body **12** and activates when the back heater cooler **60** is cooling the outer surface **38** of the body **12**. Each strap heating indicator **86** is coupled to a respective carrying strap **18** of the pair of carrying straps **18** and activates when the respective carrying strap **18** is being heated by the strap heater **62** associated with the respective carrying strap **18**. The reservoir cooling indicator **88** is coupled to the body **12** adjacent to the hose **68** and activates when the reservoir cooler **74** is cooling the drink reservoir **66**.

An input **90** is electrically coupled to the control circuit **76** and selectively directs the control circuit **76** to activate one of each bat heater **58**, the back heater cooler **60**, each strap heater **62**, and the reservoir cooler **74**. The input **90** may be coupled to the body **12** and is positioned on the first lateral side **54** of the body **12**. The input **90** may also comprise a switch **92** for selecting an off mode, a heating mode, and a cooling mode. The off mode comprises each bat heater **58**, the back heater cooler **60**, each strap heater **62** and the reservoir cooler **74** are deactivated. The heating mode comprises each bat heater **58**, the back heater cooler **60**, and each strap heater **62** heating. And the cooling mode comprises the back heater cooler **60** and the reservoir cooler **74** cooling. The input **90** may alternatively communicate wirelessly with and remotely from the control circuit **76**. The input **90** may also comprise a touchscreen, buttons, dials, or the like. In some embodiments, the input **90** controls each bat heater **58**, the back heater cooler **60**, each strap heater **62**, and the reservoir cooler **74** individually and includes the option to cool the water reservoir with the reservoir cooler **74** while heating elsewhere with one of each bat heater **58**, the back heater cooler **60**, and each strap heater **62**.

A power source **94** is electrically coupled to the control circuit **76** and is positioned in the interior space **16**. The power source **94** comprises a battery **96**. Each of a pair of charging ports **98** is electrically coupled to the control circuit **76**. Each charging port **98** is configured for one of coupling to an external power supply for charging the battery **96** and coupling to an electronic device for charging the electronic device with the battery **96**. Each charging port **98** is coupled to the body **12** and is positioned on the first lateral side **54**. A solar panel **100** is electrically coupled to the control circuit **76** and is configured for converting solar radiation into electricity. The solar panel **100** is coupled to the body **12** and is positioned on the top side **22**.

A bag handle **102** is telescopically coupled to the top side **22** of the body **12** adjacent to the back side **20**. The bag handle **102** is movable between a retracted position and an extended position. The bag handle **102** comprises an elongated grip **104** that is oriented laterally with respect to the body **12**. A pair of laterally spaced wheels **106** are coupled to and extend downwardly from the bottom side **24** of the body **12**. Pockets **108** may be positioned across the outer surface **38** for storing items. Mounting hooks **110** are coupled to the back side **20** of the body **12** adjacent to the top side **22** for hanging the heating and cooling backpack apparatus **10**. A pouch **118** is also coupled to the back side **20** of the body **12** adjacent to the top side **22** which is also positioned adjacent to the mounting hooks **110** so that the mounting hooks **110** can be stored within the pouch **118**. Each of a plurality of straps **112** is coupled to one of the first lateral side **54** and the second lateral side **56** adjacently above an associated one of the bat sleeves **36**. Each strap **112** has a pair of free ends **114** which are joinable with each other to wrap the strap **112** around the baseball bat **46** when the baseball bat **46** is stored in a selected one of the plurality of bat sleeves **36** to secure the baseball bat **46** in the selected bat sleeve **36**. The free ends **114** may be joinable via a hook-and-loop fastener **116**, button, snap, buckle, or the like.

In use, the heating and cooling backpack apparatus **10** stores items in the interior space **16** and in the pockets **108**. A fluid such as a beverage may be contained in the drink reservoir **66**. Baseball bats **46** and like sports equipment may be stored in the bat sleeves **36** as described above and secured in place using the straps **112**. To heat the stored sports equipment, the input **90** is actuated to activate a bat heater **58** coupled to the bat sleeve **36** where the sports equipment is stored. To cool the fluid in the drink reservoir **66**, the input **90** is actuated to activate the reservoir cooler **74**. The input **90** may also be actuated to activate the back heater cooler **60** to heat or cool the outer surface **38** of the body **12** across the back side **20** of the body **12** and may be actuated to activate the strap heaters **62** to heat the straps **112**. By heating and cooling the outer surface **38** of the body **12** across the back side **20**, the outer surface **38** may provide a comfortable temperature for a user who holds or carries the heating and cooling backpack apparatus **10** against their clothes or skin. Embodiments with the bag handle **102** and the wheels **106** may be used to move the heating and cooling backpack apparatus **10** along a support surface by grasping the elongated grip **104** and moving the bag handle **102** while the wheels **106** engage the support surface.

With respect to the above description then, it is to be realized that the optimum dimensional relationships for the parts of an embodiment enabled by the disclosure, to include variations in size, materials, shape, form, function and manner of operation, assembly and use, are deemed readily apparent and obvious to one skilled in the art, and all equivalent relationships to those illustrated in the drawings and described in the specification are intended to be encompassed by an embodiment of the disclosure.

Therefore, the foregoing is considered as illustrative only of the principles of the disclosure. Further, since numerous modifications and changes will readily occur to those skilled in the art, it is not desired to limit the disclosure to the exact construction and operation shown and described, and accordingly, all suitable modifications and equivalents may be resorted to, falling within the scope of the disclosure. In this patent document, the word "comprising" is used in its non-limiting sense to mean that items following the word are included, but items not specifically mentioned are not excluded. A reference to an element by the indefinite article "a" does not exclude the possibility that more than one of the element is present, unless the context clearly requires that there be only one of the elements.

I claim:

1. A heating and cooling backpack apparatus comprising:

a body having an outer shell, said outer shell defining an interior space;

a carrying strap being coupled to and extending outwardly from said body, said carrying strap extending from a back side of said body adjacent to a top side of said body to said back side of said body adjacent to a bottom side of said body;

a back heater cooler being coupled to said back side of said body, said back heater cooler selectively heating and selectively cooling said outer surface of said body across said back side;

a control circuit being coupled to said body and being positioned within said interior space, said control circuit being electrically coupled to said back heater cooler;

a bat sleeve being coupled to an outer surface of said body, said bat sleeve comprising a tubular panel, said bat sleeve having an open top and a closed bottom, said bat sleeve being configured for holding a baseball bat; and

a bat heater, said bat heater being coupled to said bat sleeve, said bat heater selectively heating said bat sleeve, said control circuit being electrically coupled to said bat heater.

2. The apparatus of claim **1**, further comprising said back heater cooler being embedded within said outer shell, said back heater cooler comprising a thermoelectric heat pump.

3. The apparatus of claim **1**, further comprising an input being electrically coupled to said control circuit, said input selectively directing said control circuit to activate said bat heater and said back heater cooler, said input comprising a switch for selecting an off mode, a heating mode, and a cooling mode, said off mode comprising each of said bat heater and said back heater cooler being deactivated, said heating mode comprising each of said bat heater and said back heater cooler heating, said cooling mode comprising said back heater cooler cooling.

4. The apparatus of claim **1**, further comprising said bat heater being embedded within said tubular panel of said bat sleeve, said bat heater comprising a thermoelectric heat pump.

5. The apparatus of claim **1**, further comprising a bat heating indicator, said bat heating indicator being coupled to said bat sleeve, said bat heating indicator being electrically coupled to said control circuit, said bat heating indicator being configured to emit light away from said body when activated, said bat heating indicator activating when said bat sleeve is being heated by said bat heater.

6. The apparatus of claim **1**, further comprising:

a back heating indicator, said back heating indicator being coupled to said back side of said body, said back heating indicator being electrically coupled to said control circuit, said back heating indicator being configured to emit light away from said body when activated, said back heating indicator activating when said back heater cooler is heating said outer surface of said body; and

a back cooling indicator, said back cooling indicator being coupled to said back side of said body, said back cooling indicator being electrically coupled to said control circuit, said back cooling indicator being configured to emit light away from said body when activated, said back cooling indicator activating when said back heater cooler is cooling said outer surface of said body.

7. The apparatus of claim **1**, further comprising a strap heater being coupled to said carrying strap, said strap heater selectively heating said carrying strap, said strap heater being electrically coupled to said control circuit.

8. The apparatus of claim **7**, further comprising said strap heater comprising a thermoelectric heat pump.

9. The apparatus of claim 7, further comprising said input comprising a switch for selecting an off mode, a heating mode, and a cooling mode, said off mode comprising each of said bat heater, said back heater cooler, and said strap heater being deactivated, said heating mode comprising each of said bat heater, said back heater cooler, and said strap heater heating, said cooling mode comprising said back heater cooler cooling.

10. The apparatus of claim 7, further comprising a strap heating indicator, said strap heating indicator being coupled to said carrying strap, said strap heating indicator being electrically coupled to said control circuit, said strap heating indicator being configured to emit light away from said body when activated, said strap heating indicator activating when said strap heater is heating said carrying strap.

11. A heating and cooling backpack apparatus comprising:

a body having an outer shell, said outer shell defining an interior space;

a carrying strap being coupled to and extending outwardly from said body, said carrying strap extending from a back side of said body adjacent to a top side of said body to said back side of said body adjacent to a bottom side of said body;

a back heater cooler being coupled to said back side of said body, said back heater cooler selectively heating and selectively cooling said outer surface of said body across said back side;

a control circuit being coupled to said body and being positioned within said interior space, said control circuit being electrically coupled to said back heater cooler;

a drink reservoir being coupled to said body and being positioned within said interior space, said drink reservoir being configured for containing a fluid;

a hose being in fluid communication with said drink reservoir, said hose extending through said outer shell of said body and extending outwardly from said body, said hose having a nozzle on a free end of said hose for dispensing the fluid; and

a reservoir cooler being coupled to said drink reservoir, said reservoir cooler selectively cooling said drink reservoir, said reservoir cooler being electrically coupled to said control circuit, said reservoir cooler being configured for selectively cooling the fluid when the fluid is contained within the drink reservoir.

12. The apparatus of claim 11, further comprising said reservoir cooler comprising a thermoelectric heat pump.

13. The apparatus of claim 11, said input comprising a switch for selecting an off mode, a heating mode, and a cooling mode, said off mode comprising each of said bat heater, said back heater cooler, and said reservoir cooler being deactivated, said heating mode comprising each of said bat heater and said back heater cooler heating, said cooling mode comprising said back heater cooler and said reservoir cooler cooling.

14. The apparatus of claim 11, further comprising a reservoir cooling indicator, said reservoir cooling indicator being coupled to said body adjacent to said hose, said reservoir cooling indicator being electrically coupled to said control circuit, said reservoir cooling indicator being configured to emit light away from said body when activated, said reservoir cooling indicator activating when said reservoir cooler is cooling said drink reservoir.

15. The apparatus of claim 1, further comprising a power source being electrically coupled to said control circuit and being positioned in the interior space, said power source comprising a battery.

16. The apparatus of claim 15, further comprising a charging port, said charging port being electrically coupled to said control circuit, said charging port being configured for one of coupling to an external power supply for charging said battery and coupling to an electronic device for charging the electronic device with said battery, each said charging port being coupled to said body and being positioned on said first lateral side.

17. The apparatus of claim 15, further comprising a solar panel being electrically coupled to said control circuit, said solar panel being configured for converting solar radiation into electricity, said solar panel being coupled to said body and being positioned on said top side.

18. A heating and cooling backpack apparatus comprising:

a body having an outer shell, said outer shell defining an interior space;

a pair of carrying straps, each said carrying strap being coupled to and extending outwardly from said body, each said carrying strap extending from a back side of said body adjacent to a top side of said body to said back side adjacent to a bottom side of said body;

a plurality of bat sleeves, each said bat sleeve being coupled to an outer surface of said body, each said bat sleeve comprising a tubular panel, each said bat sleeve having an open top and a closed bottom, each said bat sleeve being configured for holding a baseball bat, said plurality of bat sleeves including a first pair of bat sleeves and a second pair of bat sleeves, each said bat sleeve of said first pair of bat sleeves being positioned on a first lateral side of said body, each said bat sleeve of said second pair of bat sleeves being positioned on a second lateral side of said body;

a pair of bat heaters, each said bat heater being coupled to an associated bat sleeve of said first pair of bat sleeves, each said bat heater being coupled to said tubular panel of said associated bat sleeve, each said bat heater being embedded within said tubular panel of said associated bat sleeve, each said bat heater selectively heating said associated bat sleeve, each said bat heater comprising a thermoelectric heat pump;

a back heater cooler being coupled to said back side of said body, said back heater cooler being embedded within said outer shell, said back heater cooler selectively heating and selectively cooling said outer surface of said body across said back side, said back heater cooler comprising a thermoelectric heat pump;

a pair of strap heaters, each said strap heater being coupled to an associated carrying strap of said plurality of carrying straps, each said strap heater selectively heating said associated carrying strap, each said strap heater comprising a thermoelectric heat pump;

a drink reservoir being coupled to said body and being positioned within said interior space, said drink reservoir being configured for containing a fluid;

a hose being in fluid communication with said drink reservoir, said hose extending through said outer shell of said body and extending outwardly from said body, said hose having a nozzle on a free end of said hose for dispensing the fluid;

a reservoir cooler being coupled to said drink reservoir, said reservoir cooler selectively cooling said drink reservoir, said reservoir cooler being configured for selectively cooling the fluid when the fluid is contained within the drink reservoir, said reservoir cooler comprising a thermoelectric heat pump;

a control circuit being coupled to said body and being positioned within said interior space, said control circuit being electrically coupled to each said bat heater, said back heater cooler, each said strap heater, and said reservoir cooler;

a plurality of indicator light emitters, each said indicator light emitter being configured to emit light away from said body when activated, each said indicator light emitter being electrically coupled to said control circuit, said plurality of indicator light emitters including:

a pair of bat heating indicators, each said bat heating indicator being coupled to a respective bat sleeve of said first pair of bat sleeves, each said bat heating indicator activating when said respective bat sleeve is being heated by said bat heater associated with said respective bat sleeve;

a back heating indicator, said back heating indicator being coupled to said back side of said body and activating when said back heater cooler is heating said outer surface of said body;

a back cooling indicator, said back cooling indicator being coupled to said back side of said body and activating when said back heater cooler is cooling said outer surface of said body;

a pair of strap heating indicators, each said strap heating indicator being coupled to a respective carrying strap of said pair of carrying straps and activating when said respective carrying strap is being heated by said strap heater associated with said respective carrying strap; and

a reservoir cooling indicator, said reservoir cooling indicator being coupled to said body adjacent to said

hose and activating when said reservoir cooler is cooling said drink reservoir;

an input being electrically coupled to said control circuit, said input selectively directing said control circuit to activate one of each said bat heater, said back heater cooler, each said strap heater, and said reservoir cooler, said input comprising a switch for selecting an off mode, a heating mode, and a cooling mode, said off mode comprising each said bat heater, said back heater cooler, each said strap heater and said reservoir cooler being deactivated, said heating mode comprising each said bat heater, said back heater cooler, and each said strap heater heating, said cooling mode comprising said back heater cooler and said reservoir cooler cooling, said input being coupled to said body and being positioned on said first lateral side;

a power source being electrically coupled to said control circuit and being positioned in the interior space, said power source comprising a battery;

a pair of charging ports, each said charging port being electrically coupled to said control circuit, each said charging port being configured for one of coupling to an external power supply for charging said battery and coupling to an electronic device for charging the electronic device with said battery, each said charging port being coupled to said body and being positioned on said first lateral side; and

a solar panel being electrically coupled to said control circuit, said solar panel being configured for converting solar radiation into electricity, said solar panel being coupled to said body and being positioned on said top side.

* * * * *