Nr	Ant	Ändring och/eller medd.-nr	Datum	Inf.	Godk.	Användes för
1		Gap for clearance	94 04 25	BAT		
2			94 08 03	BAT		
3		Det. 38, 46	95 02 22	BAT		
4		" 8, 10, 48	95 10 19	BAT		

55	2	Attachment laminate	1×92 125	60×100	
54	1	" "	"	100×130	
53	2	" "	"		
52	2	" "	"		
51	4	" "	2×92 125		
50	1	Divinycell 60		5 mm	

49	12	Attachment laminate	2×92 125	40×115	
48	2	Foam 30			
47	2	Divinycell 60		5 mm	
46	2	"		"	
45	2	"		"	
44	2	"		"	
43	1	"		"	
42	4	Local reinforcement	1×92 125		
41	2	"	2×92 125		
40	4	"	1×92 125		
39	4	"	"		

Drawing not to scale

ALL 92 125 GLASS TAPES MUST BE CUT WITH THE FIBER ORIENTATION 45° TO THE LONGITUDINAL.

SECTION SII, SIII, SIV ARE SYMMETRICAL.
SECTION SI IS NON-SYMMETRICAL.

(A) Cut hole in lower shell to fit 3 mm outside fin spar.

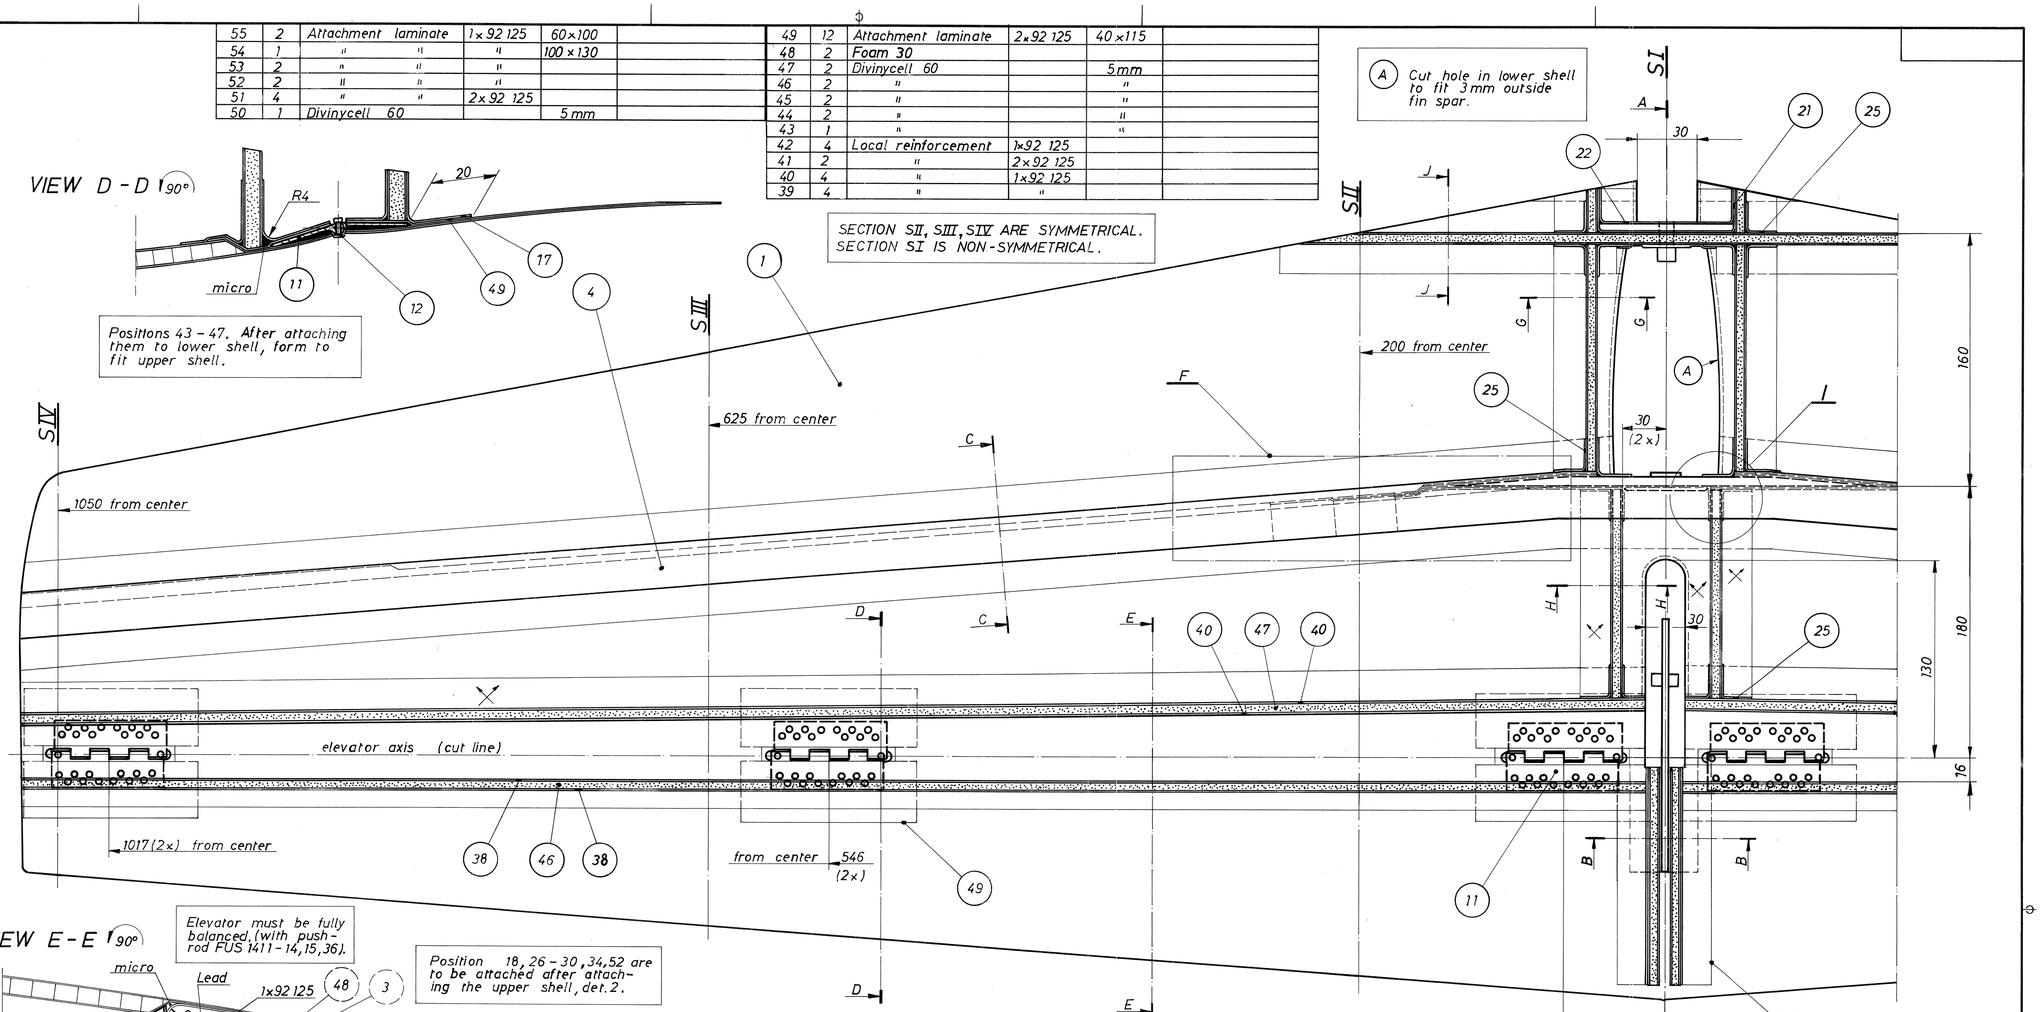







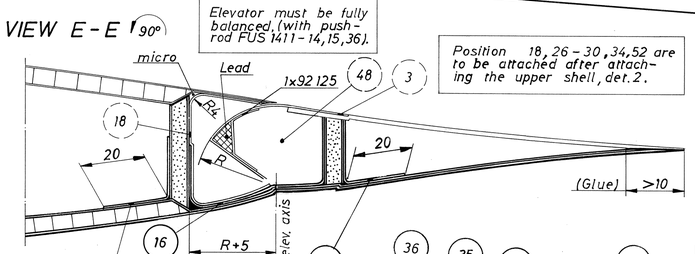

Elevator must be fully balanced, (with push-rod FUS 1411 - 14, 15, 36).

Position 18, 26 - 30, 34, 52 are to be attached after attaching the upper shell, det. 2.

Attach pos. 3, 48, after cutting out rudder.

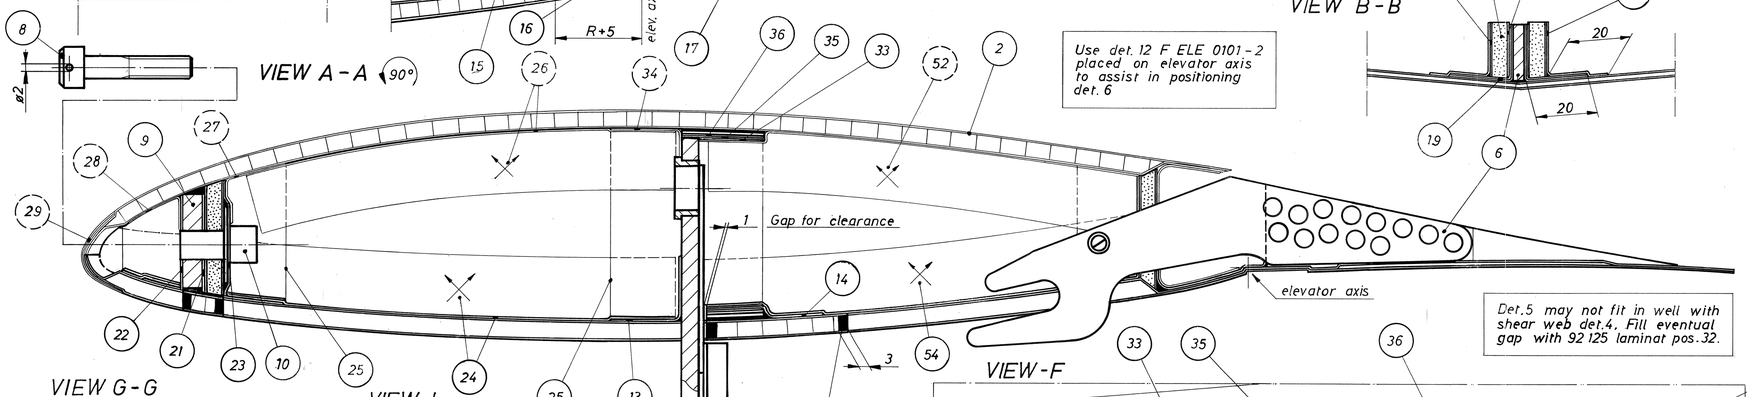

Use det. 12 F ELE 0101 - 2 placed on elevator axis to assist in positioning det. 6



Det. 5 may not fit in well with shear web det. 4. Fill eventual gap with 92 125 laminat pos. 32.

Remove nomex around cutting edges and fill with flox.





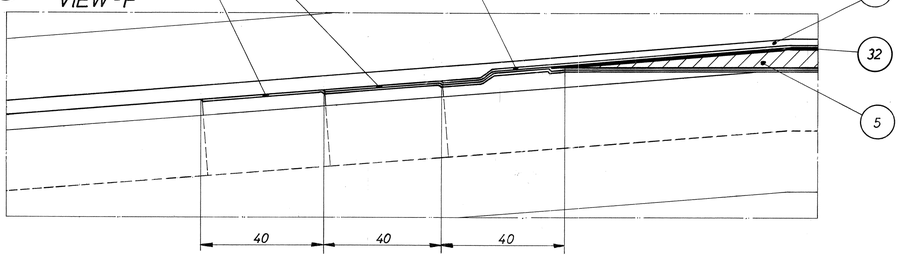

Page 5

38	4	Local reinforcement	1×92 125		
37	4	"	"		
36	1	"	"	120×350	
35	1	"	"	120×430	
34	1	Attachment laminate	1×92 125		
33	1	"	"	120×510	
32	2	Distance laminate	92 125		
31	4	Attachment laminate	1×92 125		
30	2	"	"		
29	1	"	3×92 125		
28	1	"	1×92 125		
27	1	"	"		
26	2	"	"		
25	14	"	"		
24	2	"	"		
23	1	"	"		
22	1	"	"		
21	1	"	"		
20	2	"	"		
19	2	"	2×92 125		
18	2	"	3×92 125		
17	2	"	1×92 125		
16	2	"	"		
15	2	"	"		
14	2	"	"		
13	2	"	"		
12	12	Rivet TAP/K 36 BS			
11	6	Page 2			
10	1	"			
9	1	"			
8	1	Bolt A4-316L Mo+ -100-MC6S M8		×40	
7	2	Page 3			
6	1	12 F ELE 0101-1			
5	1	Page 3			
4	1	12 S LAM 011			
3	2	Attachment laminate	2×92125		left & right
2	1	12 S LAM 004 - U			
1	1	12 S LAM 004 - L			

Det. -nr Pos. no	Ant. Qty.	Benämning Denomination	Material	Mod. no. Ämne /Matr. Dimension	Anmärkning Remarks
Konstr. /Constr.		Ritad /Drawn BAT	Kontr. /Contr.	Godkänd /Approved	Skala /Scale
Ersätter /Replaces		Ersatt av /Replaced by		Dat. /Date 94.01.18	

WINDEX 1200
RADAB AB
STOCKHOLM, SWEDEN

STABILIZER

Ritn. -nr /Drawing No 12 STA 1001 1 of 5

Sv Pat 466744 Rittilmskompaniet TERRAB AB, VÄRÖ/ -