


```
R1
Ethernet0/2          unassigned      YES TFTP   down      down
Ethernet0/3          unassigned      YES TFTP   down      down
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR


Gateway of last resort is 20.0.0.2 to network 0.0.0.0

S*    0.0.0.0/0 [1/0] via 20.0.0.2
      10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      10.0.0.0/8 is directly connected, Ethernet0/0
L      10.0.0.1/32 is directly connected, Ethernet0/0
      20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C      20.0.0.0/8 is directly connected, Ethernet0/1
L      20.0.0.1/32 is directly connected, Ethernet0/1
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#access-list
*Sep 14 10:51:43.782: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
R1(config)#access-list 10 permit 10.0.0.10 0.0.0.0
R1(config)#int e0/0
R1(config-if)#ip access-group 10 in
R1(config-if)#
```

R1

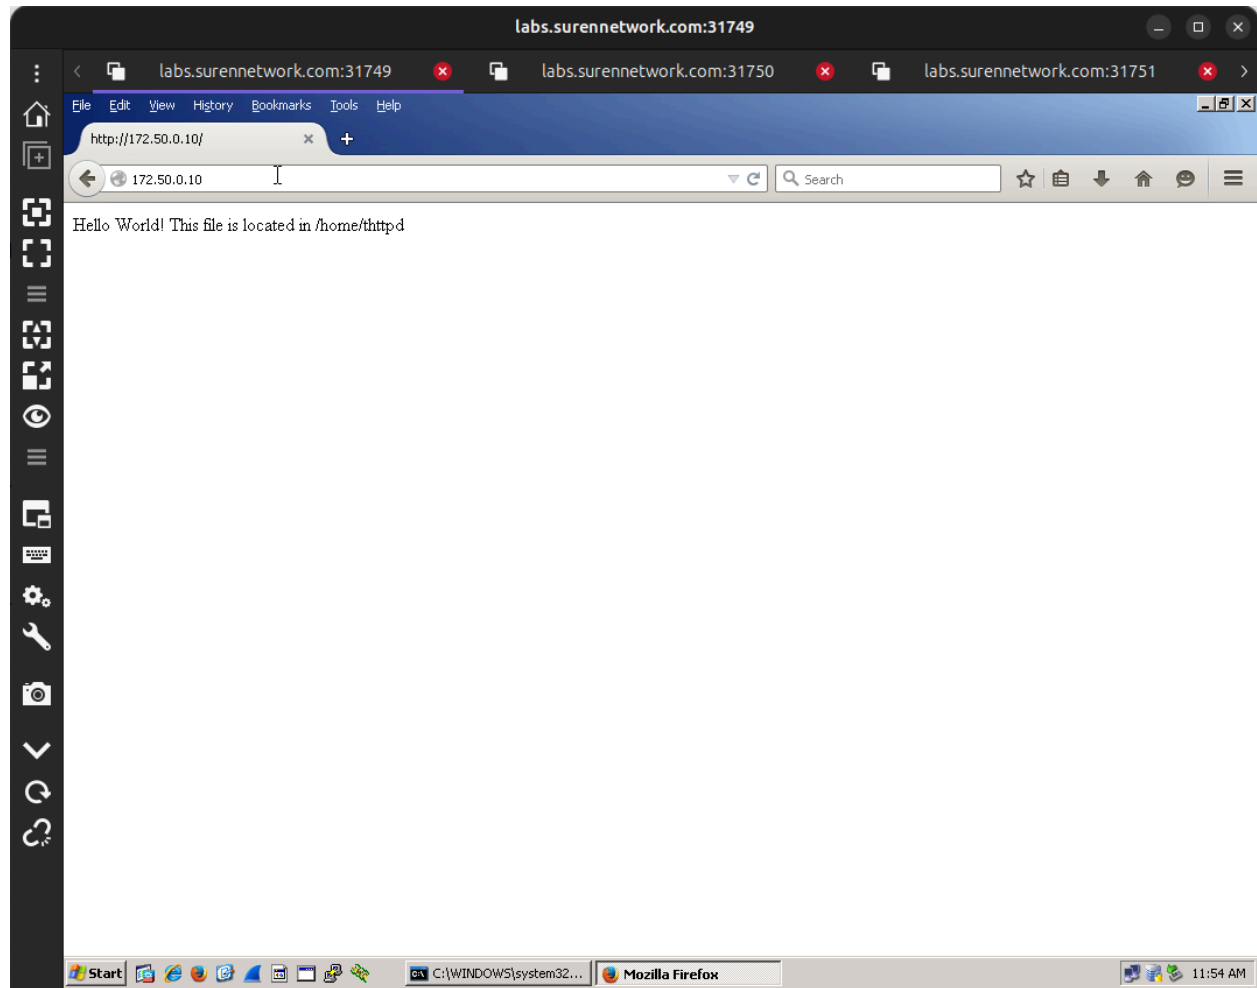

PC1

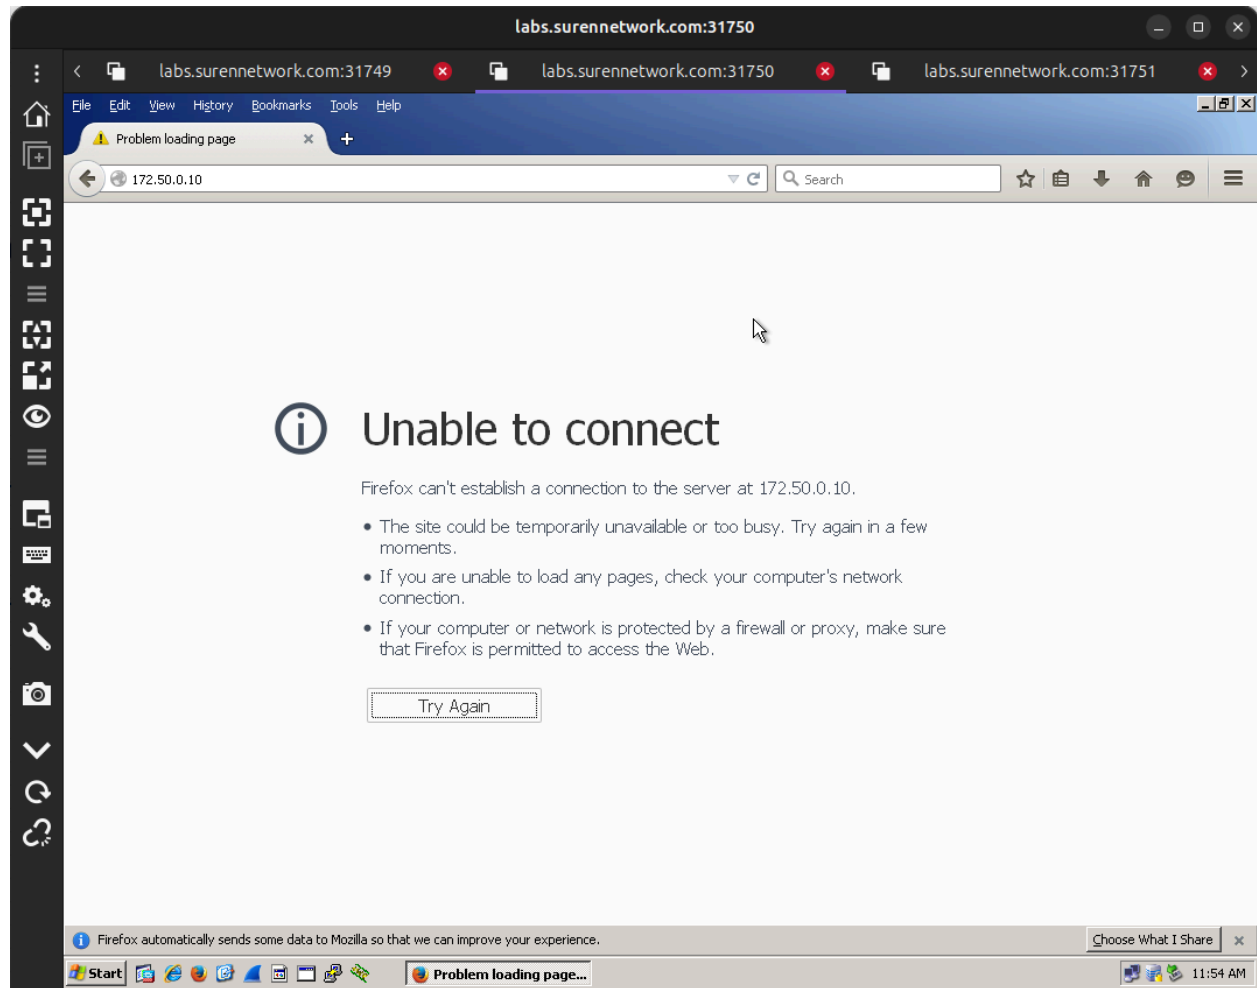


PC 2

```
R1
Trying 49.204.127.18...
Connected to labs.surennetwork.com.
Escape character is '^]'.


R1#
R1#
R1#
R1#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
R1(config)#$ 100 permit tcp 10.0.0.10 0.0.0.0 172.50.0.10 0.0.0.0 eq 80
R1(config)#access-list 100 tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80
      ^
% Invalid input detected at '^' marker.

R1(config)#$ 100 permit tcp 10.0.0.20 0.0.0.0 172.50.0.20 0.0.0.0 eq 80
R1(config)#int e0/0
R1(config-if)#ip access-group 100 in
R1(config-if)#exit
R1(config)#exit
R1#
*Sep 14 12:55:50.827: %SYS-5-CONFIG_I: Configured from console by console
R1#
```


Extended ACL R1

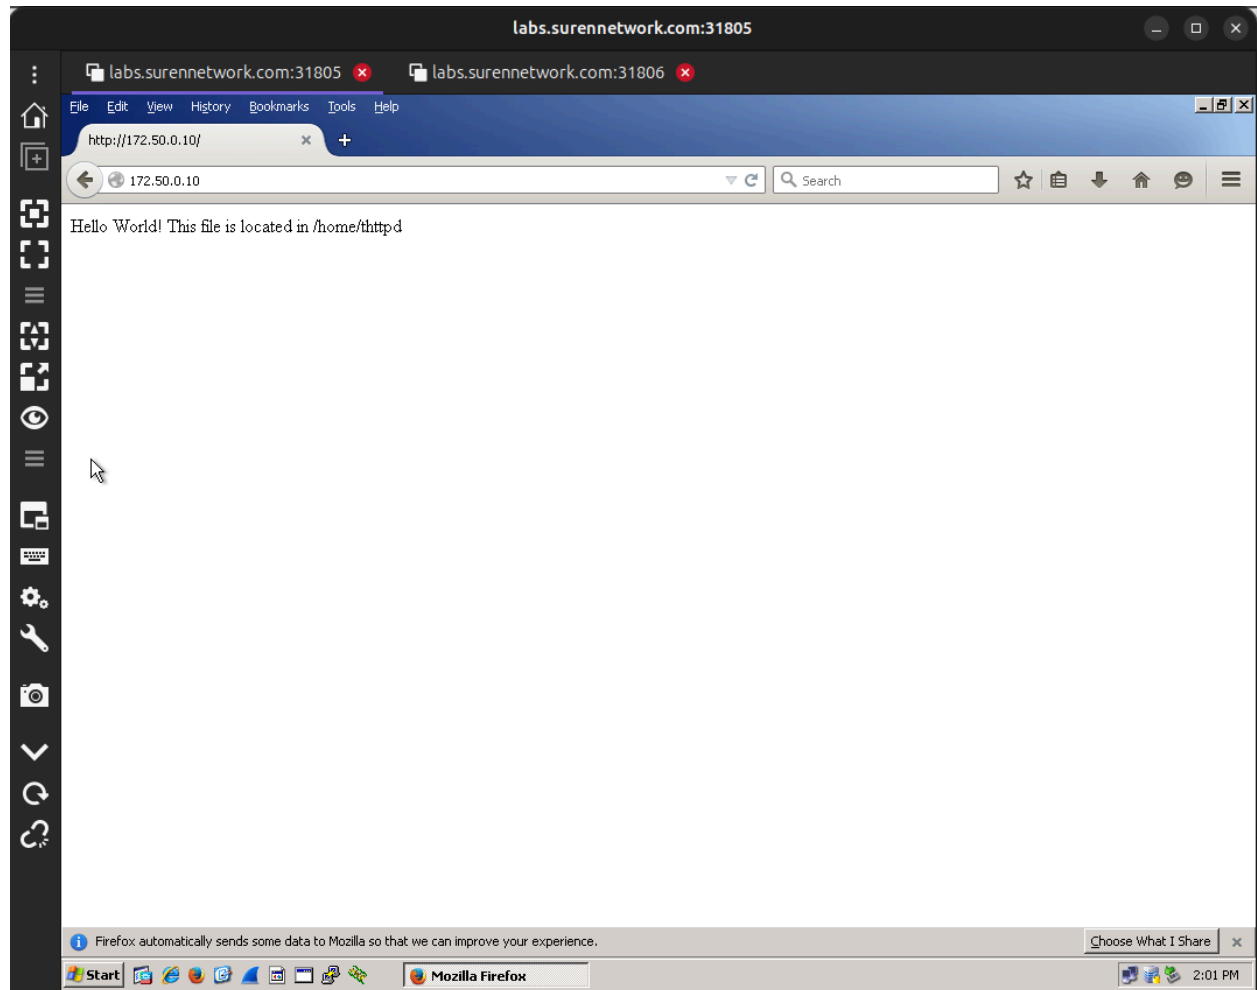


PC 1

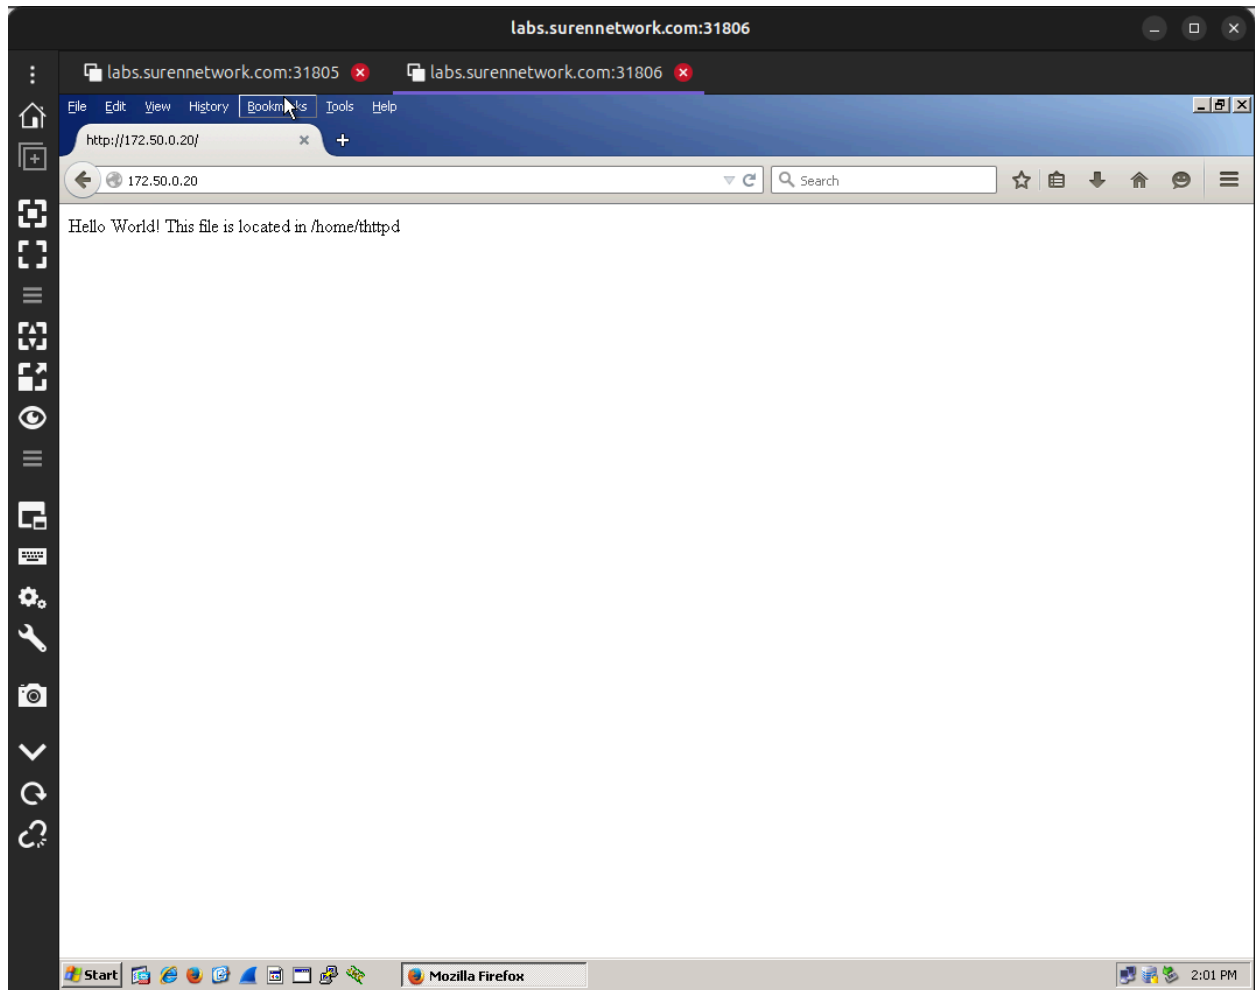


PC2

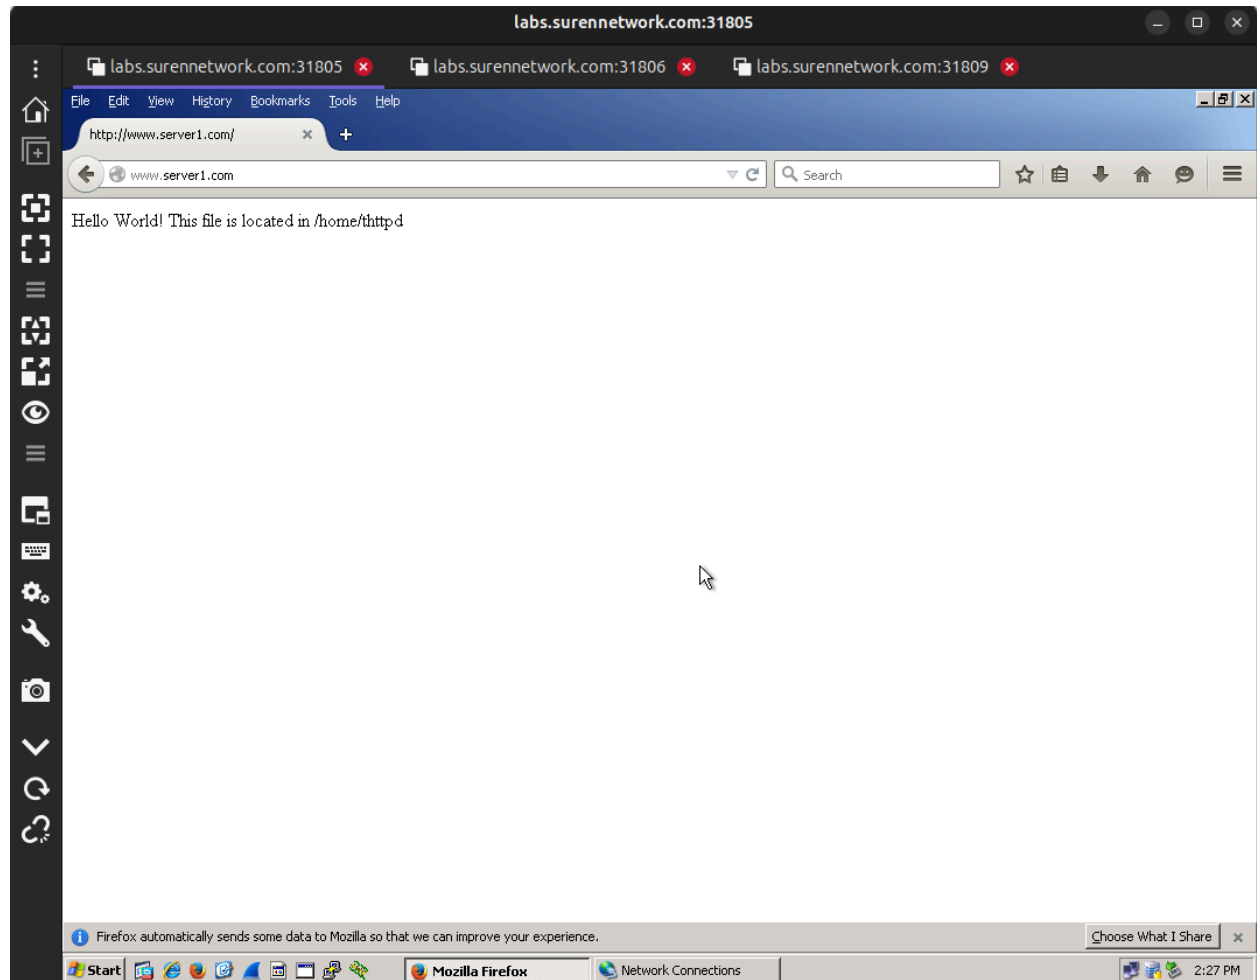


PC1

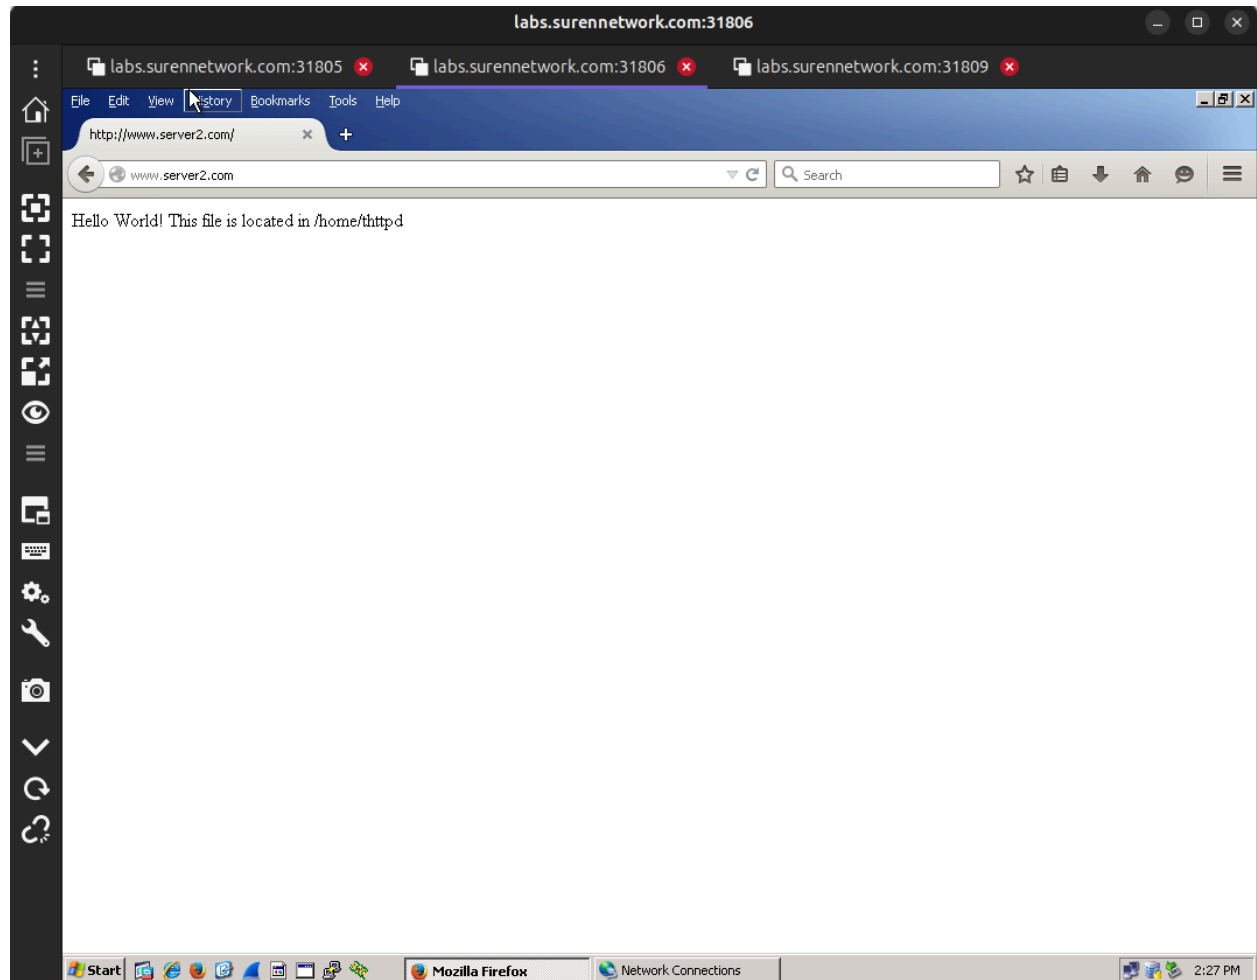

PC2

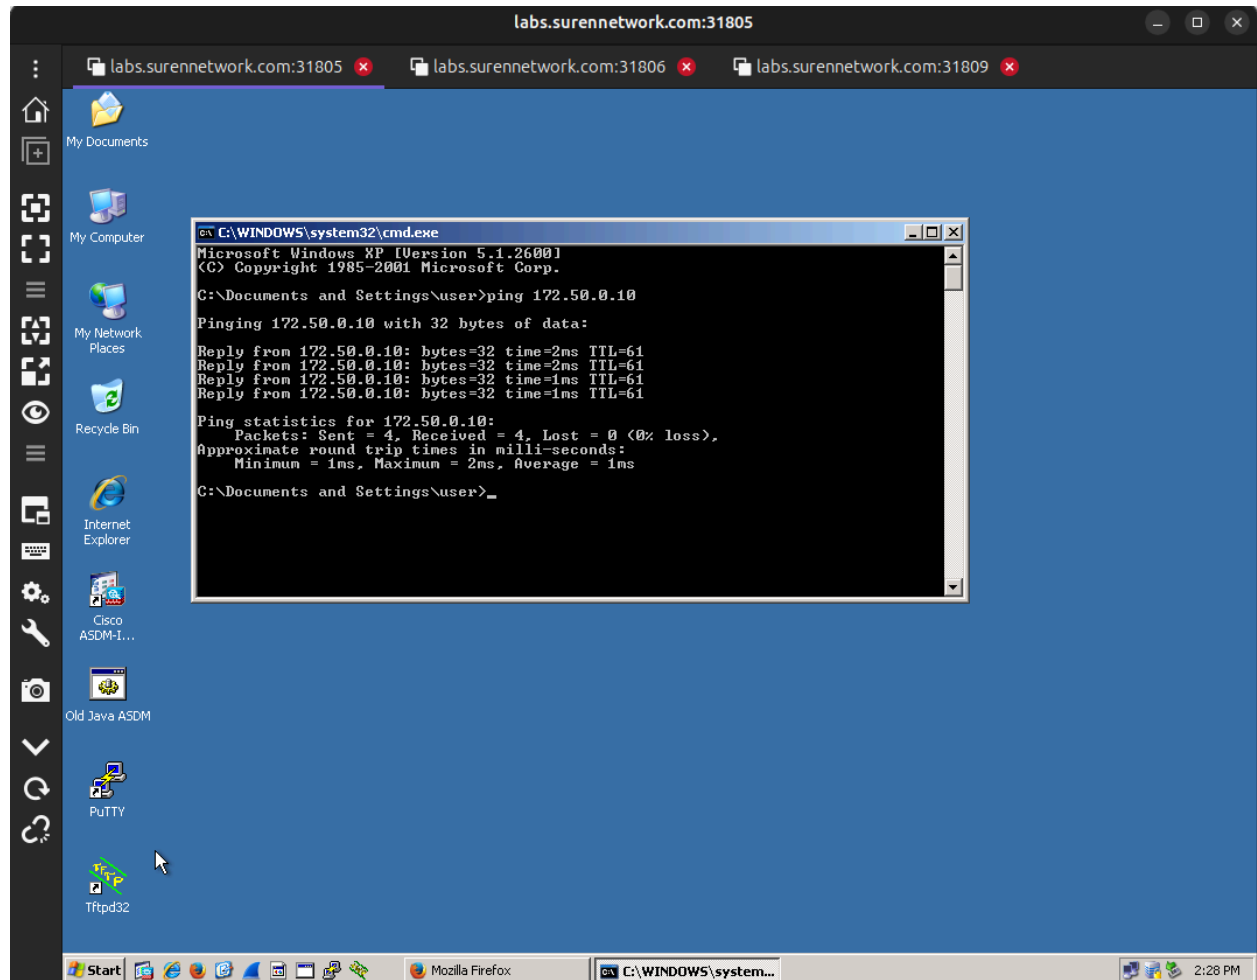

PC1

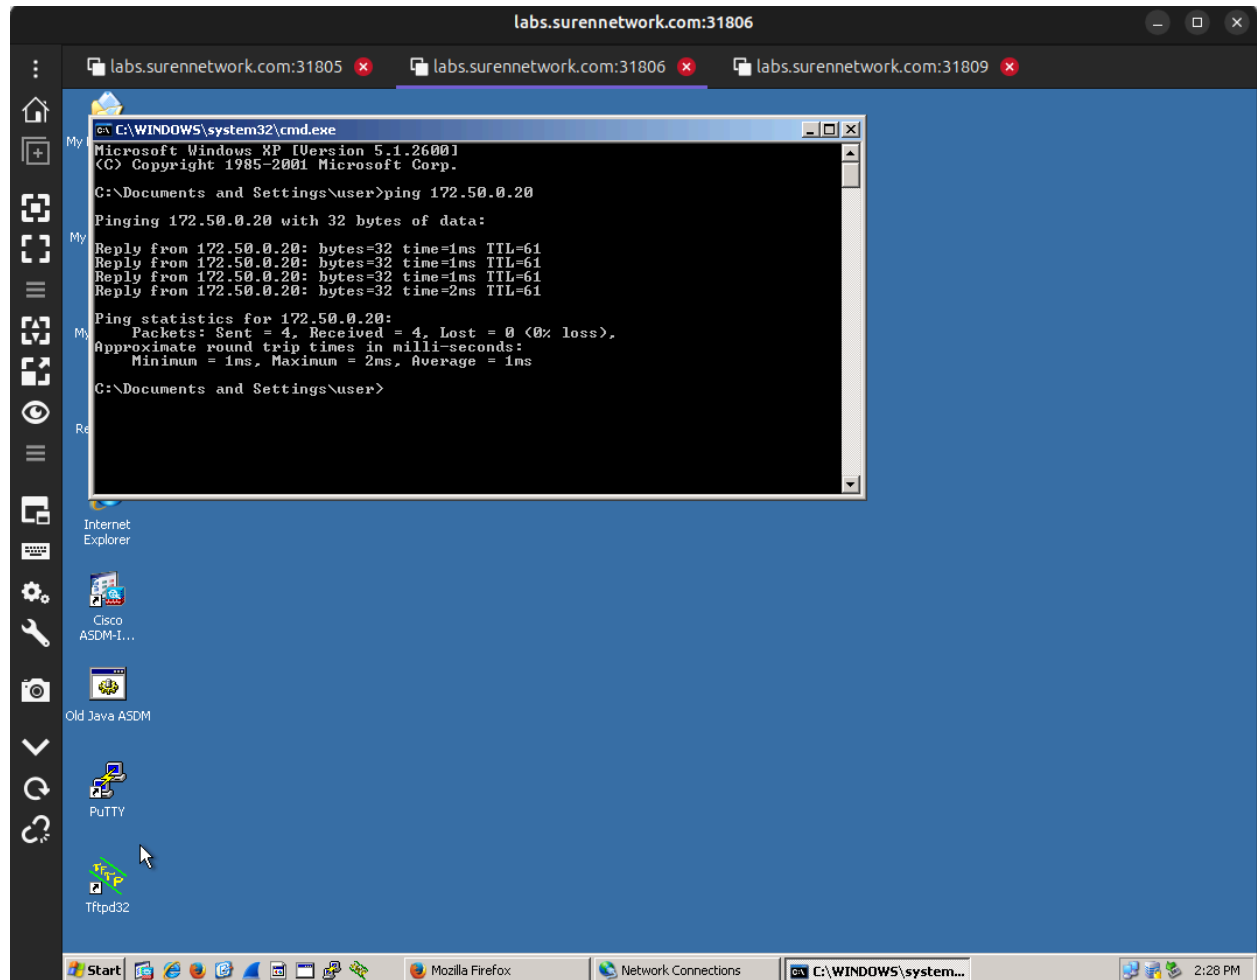

PC2