






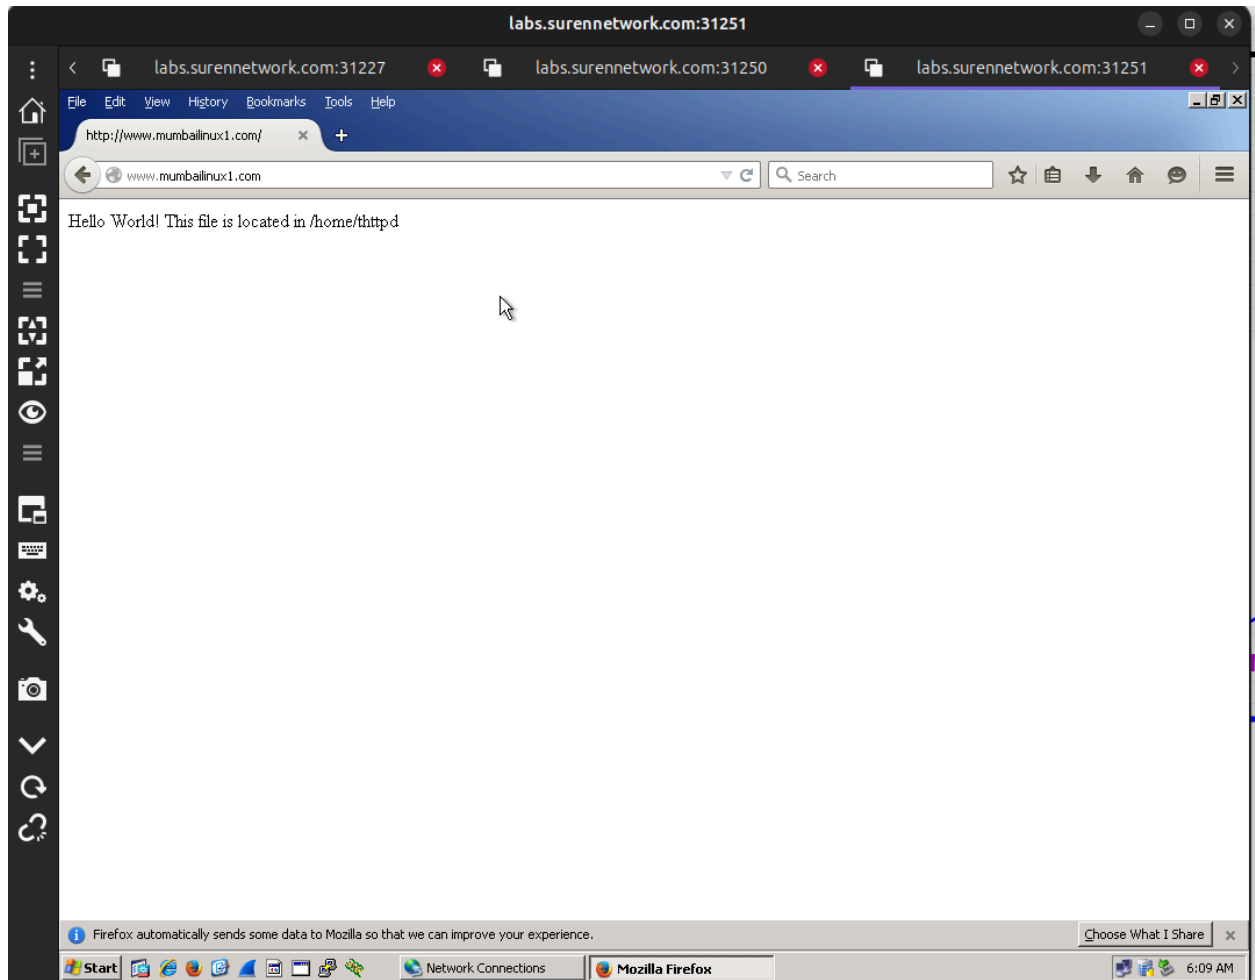


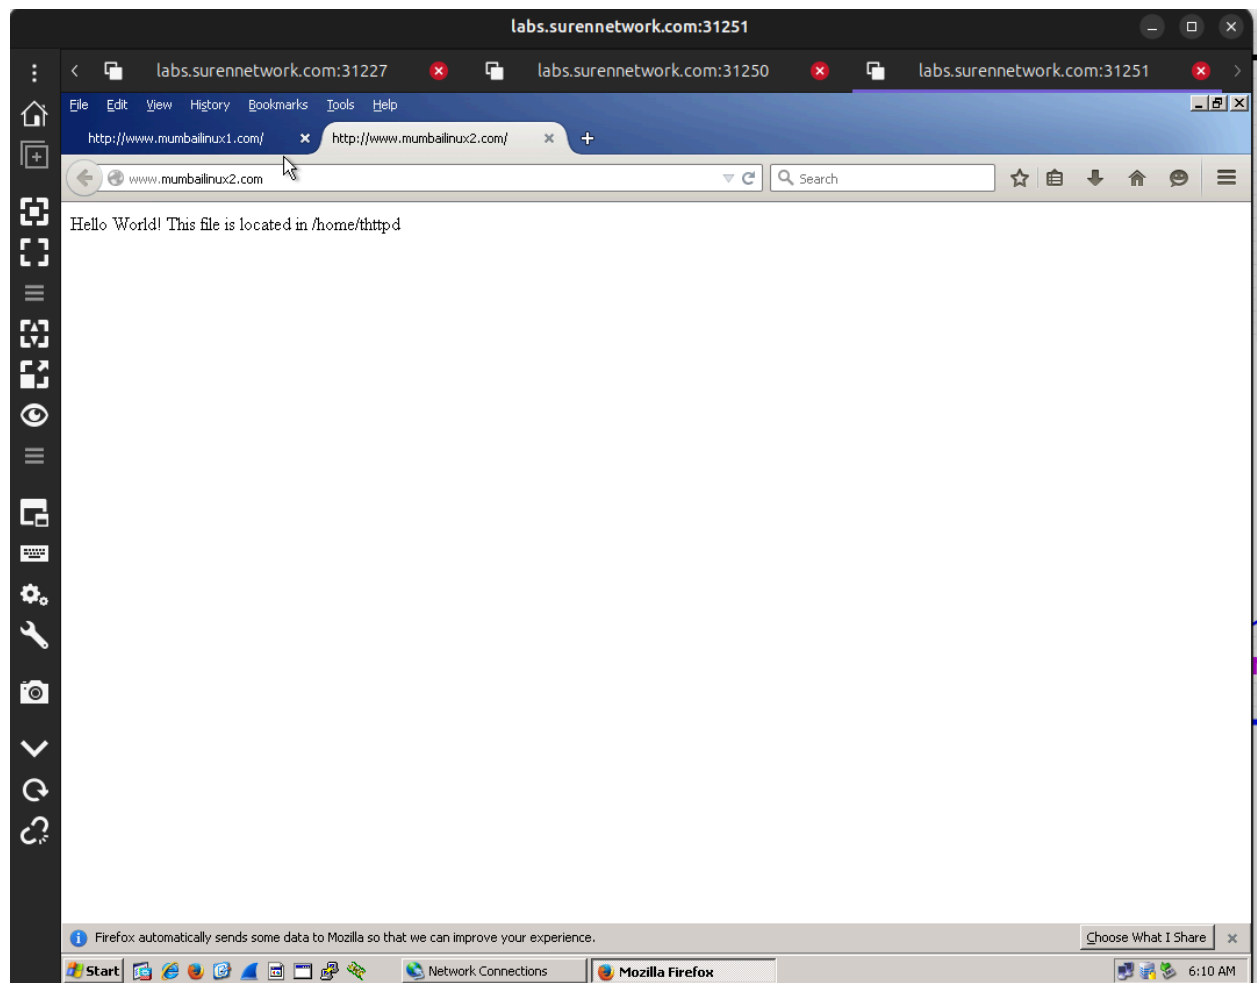


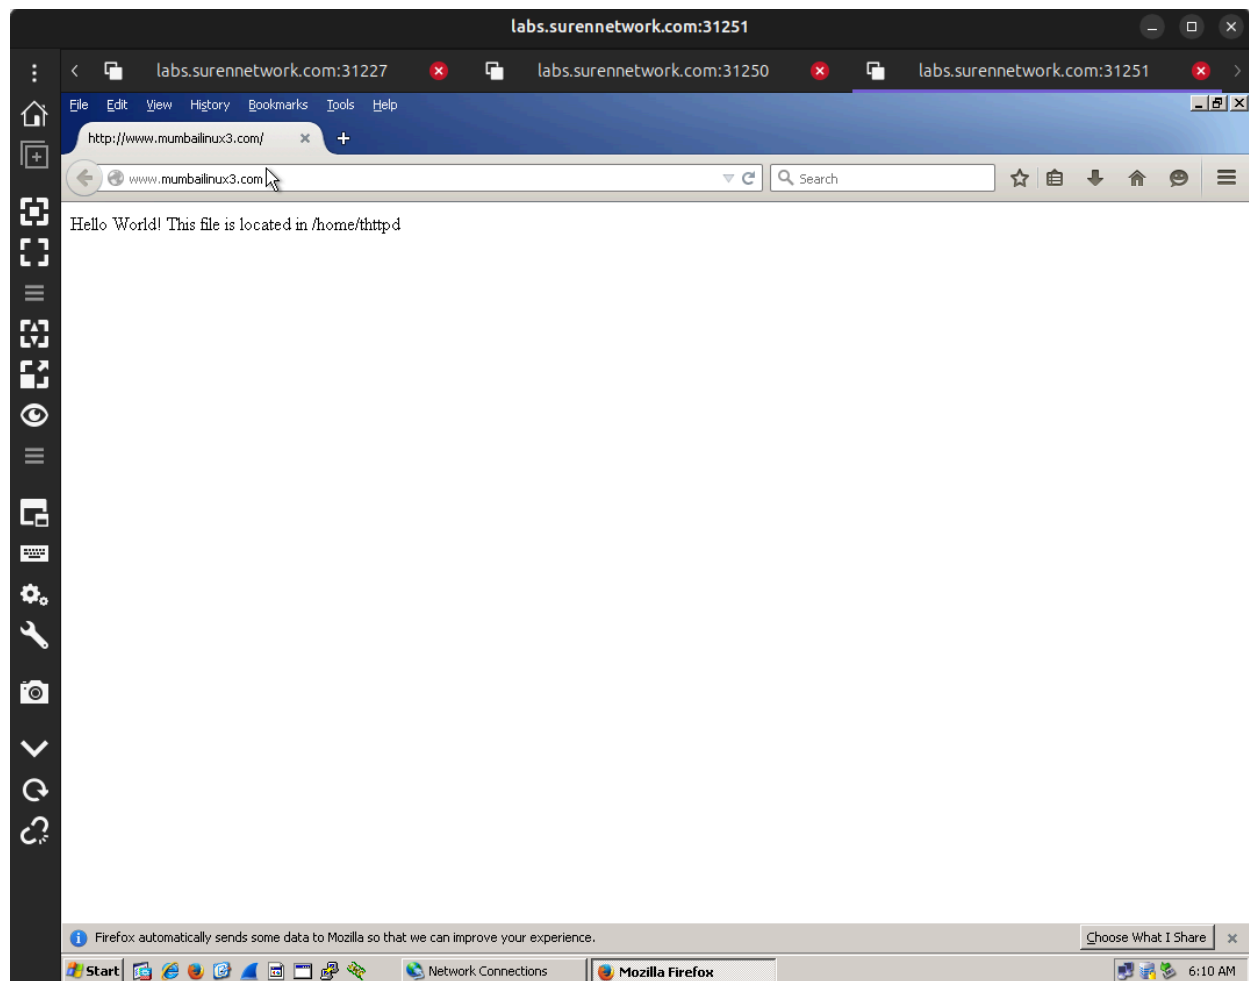


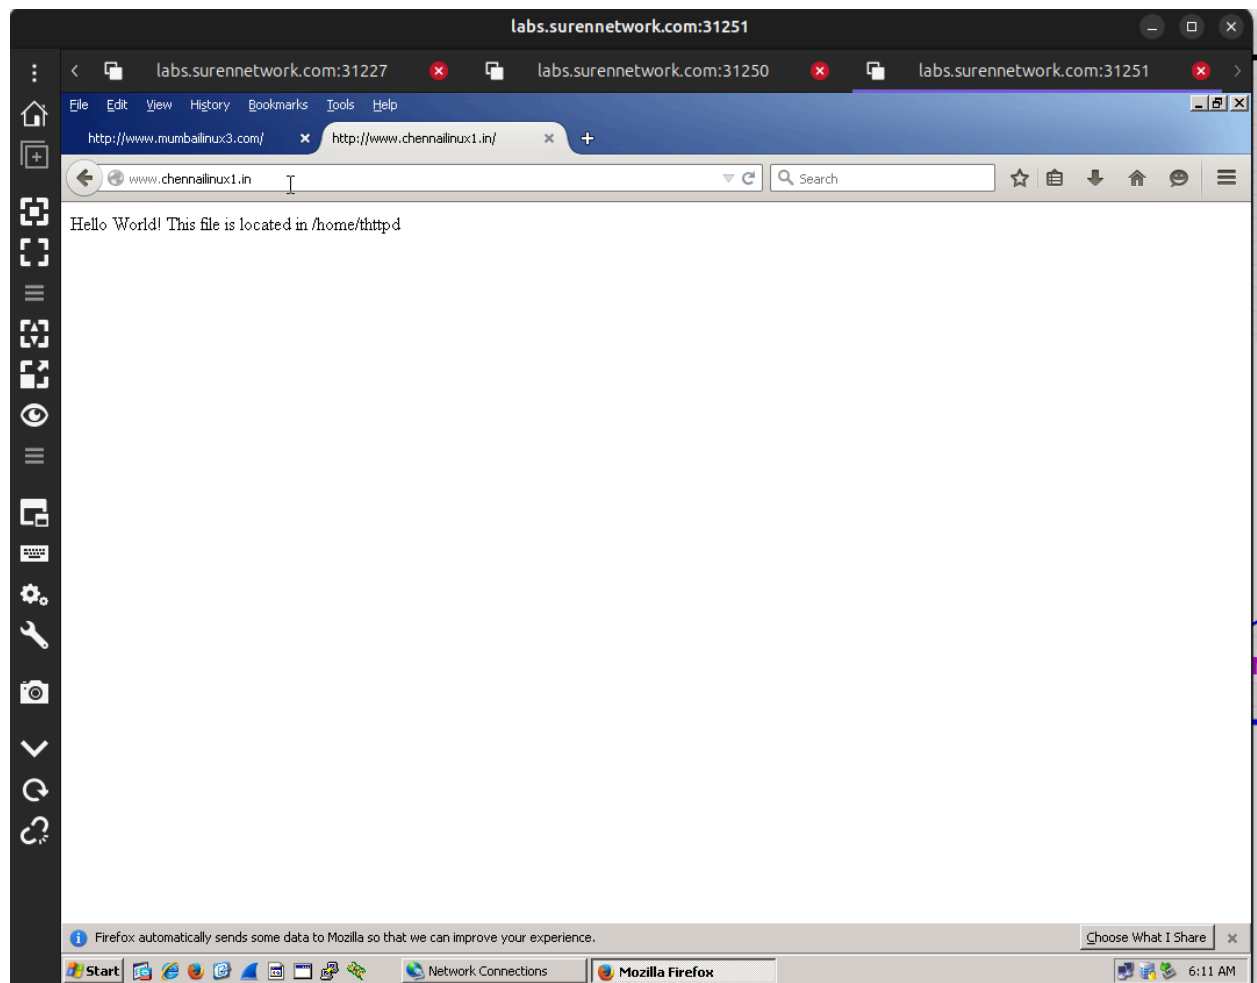


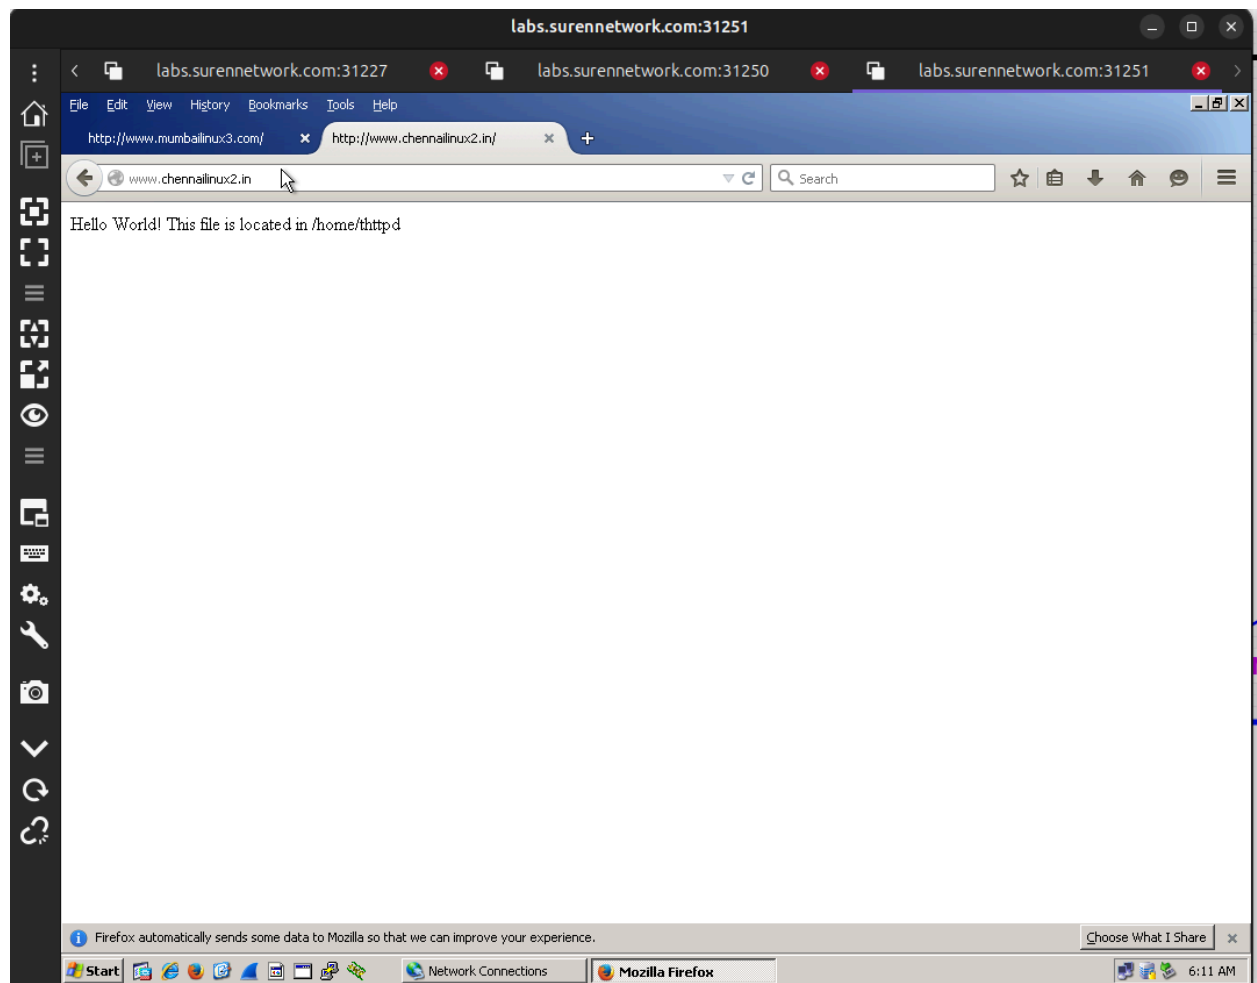


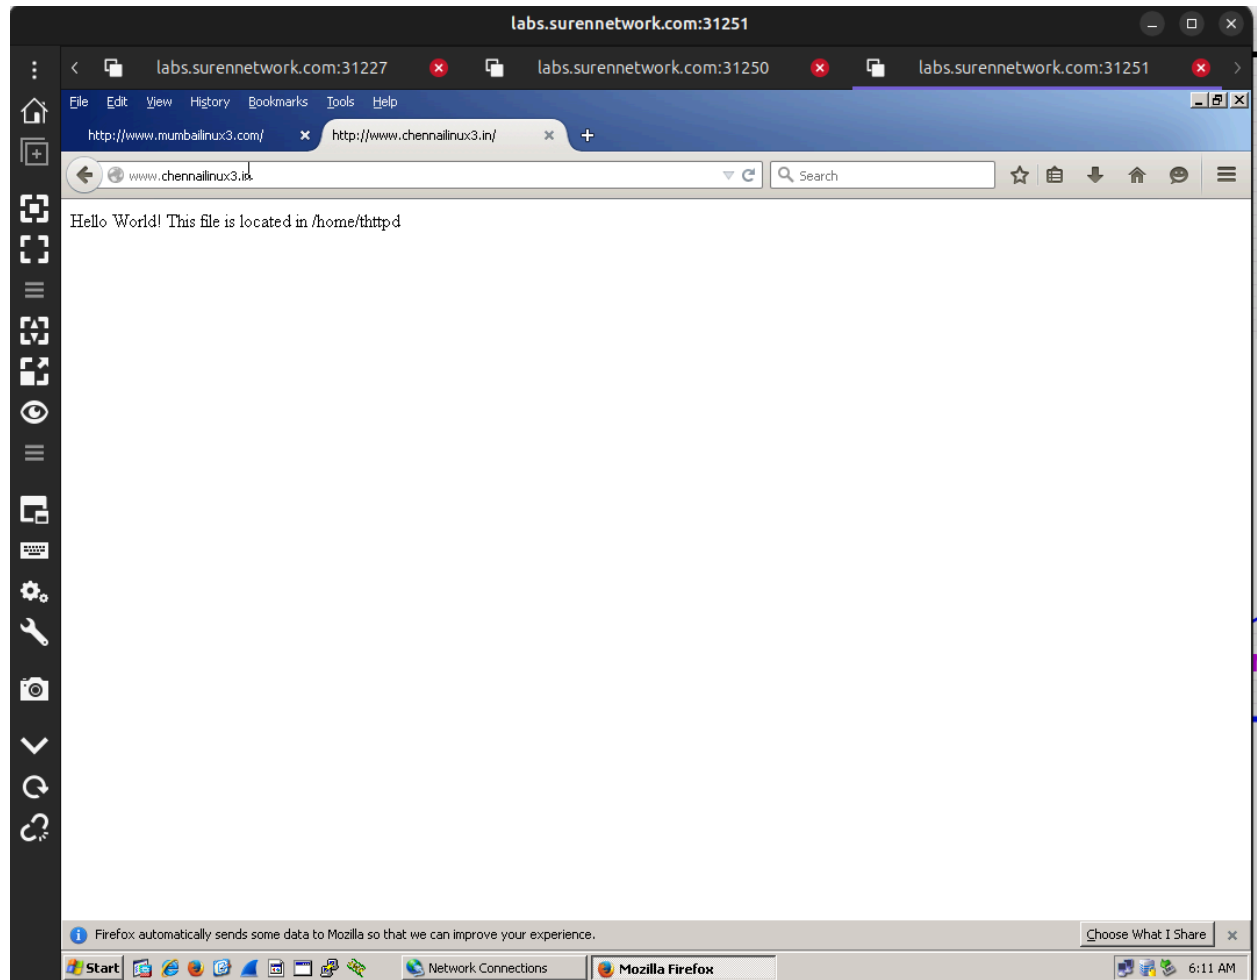


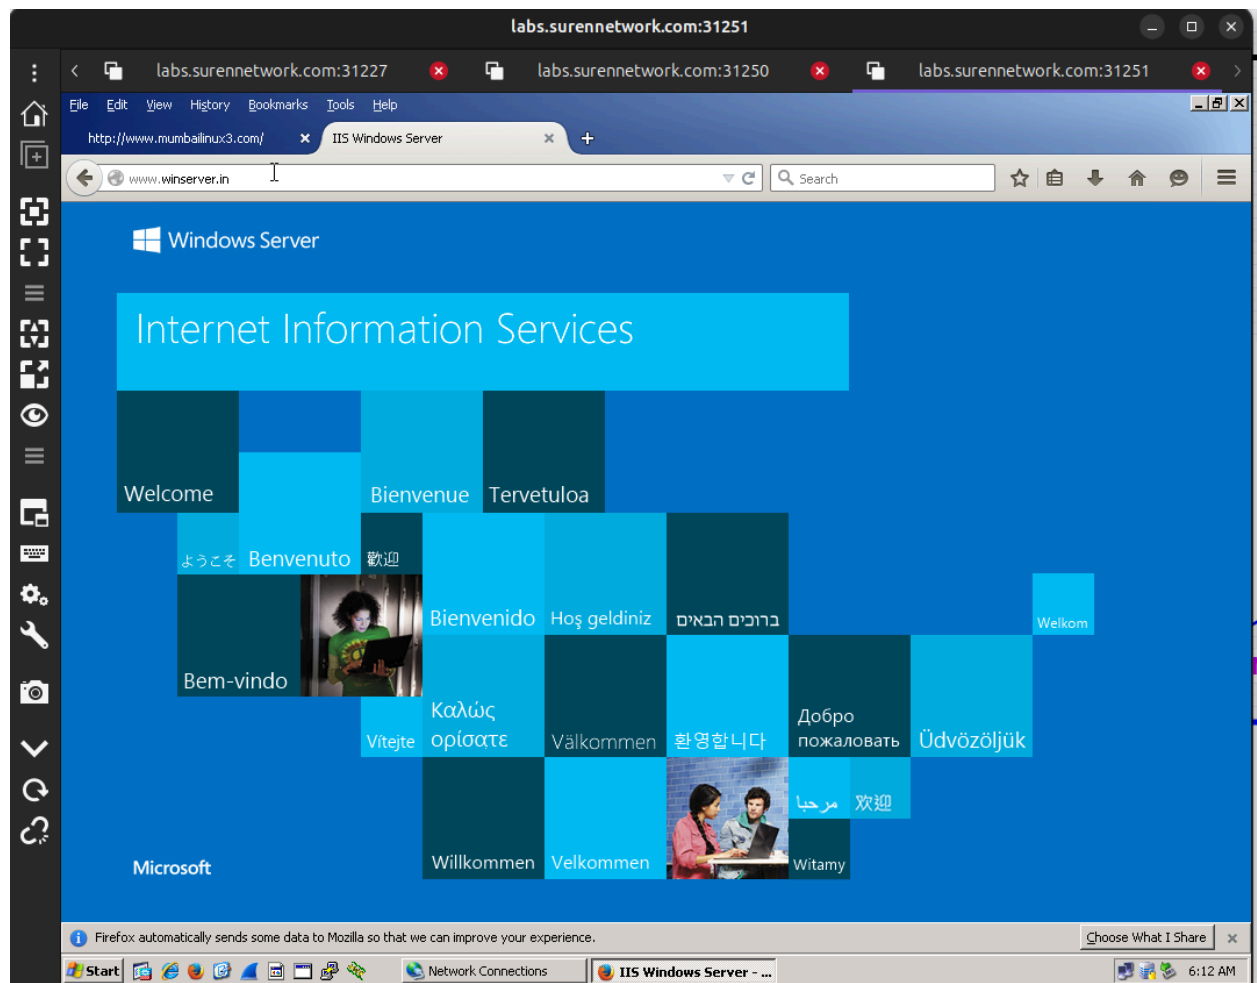


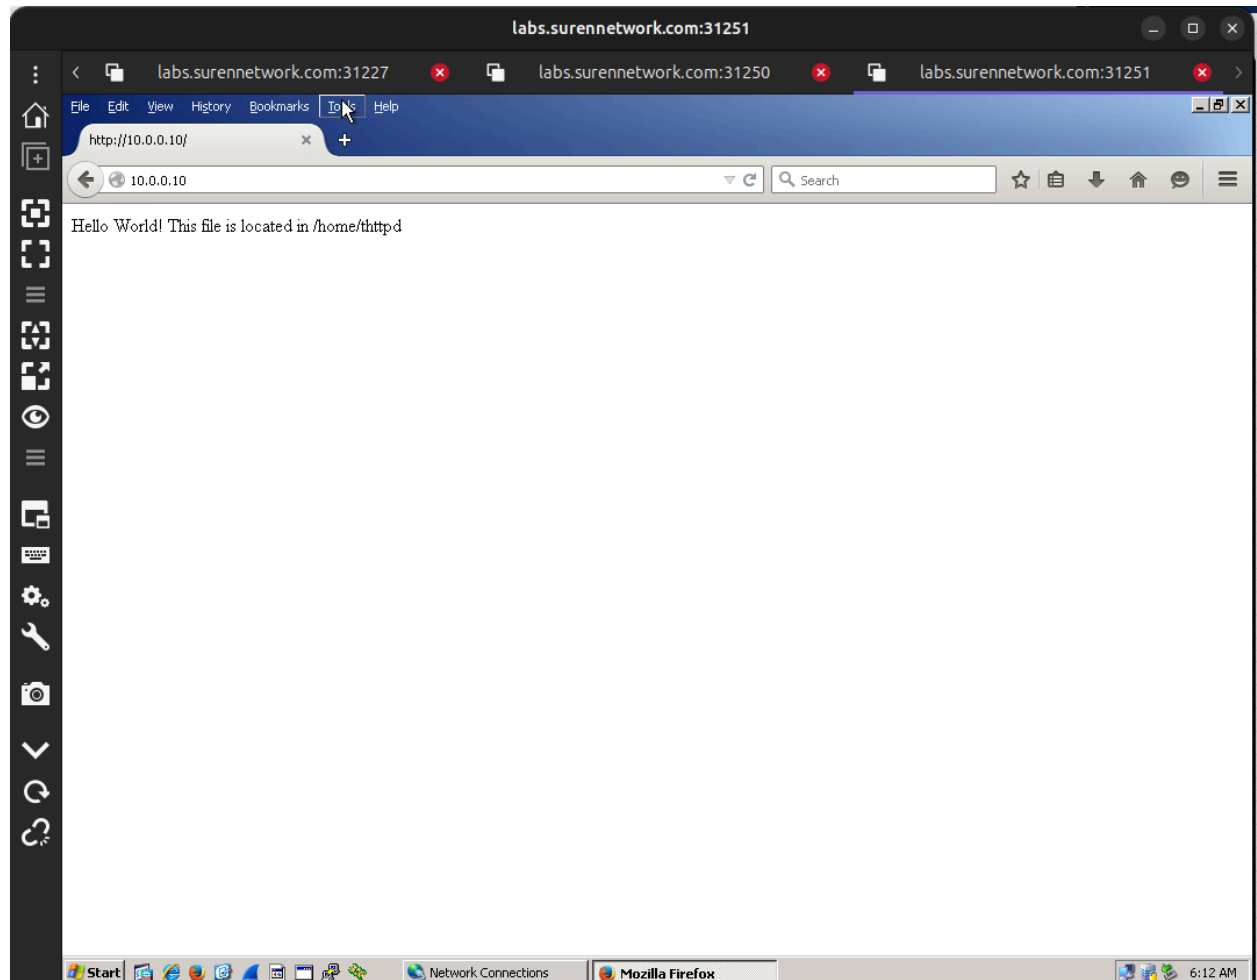


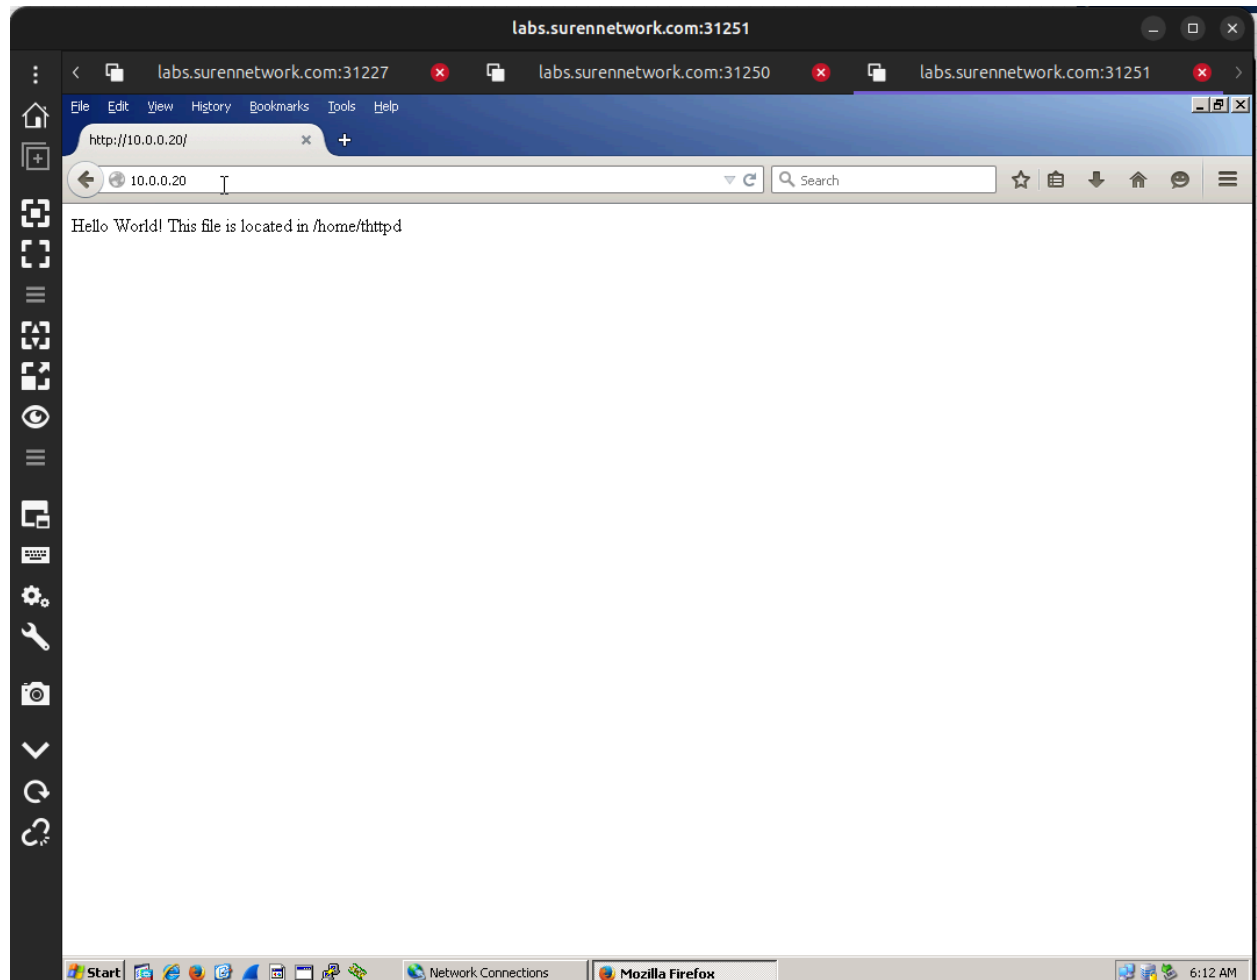


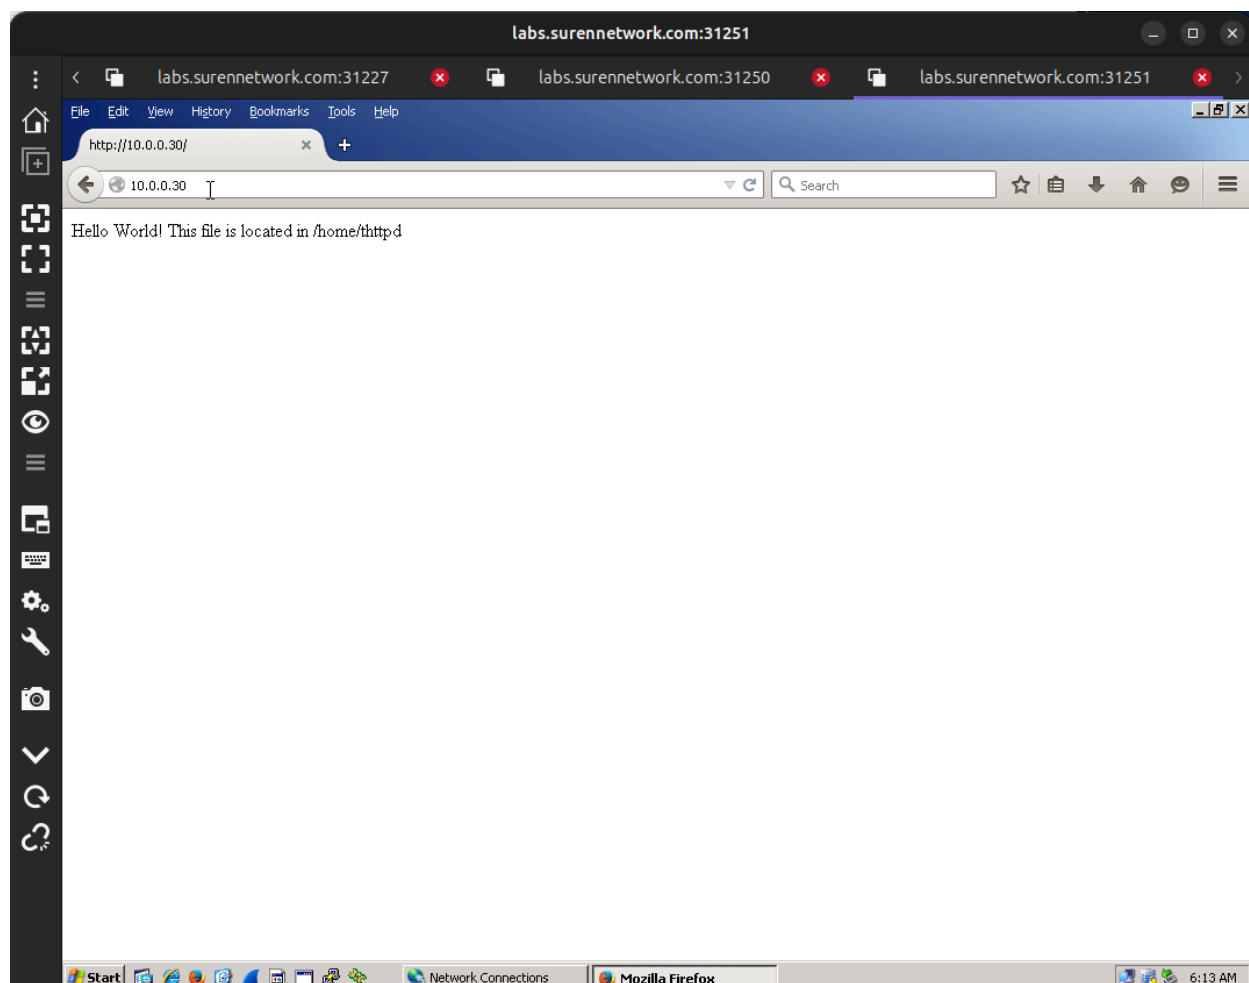


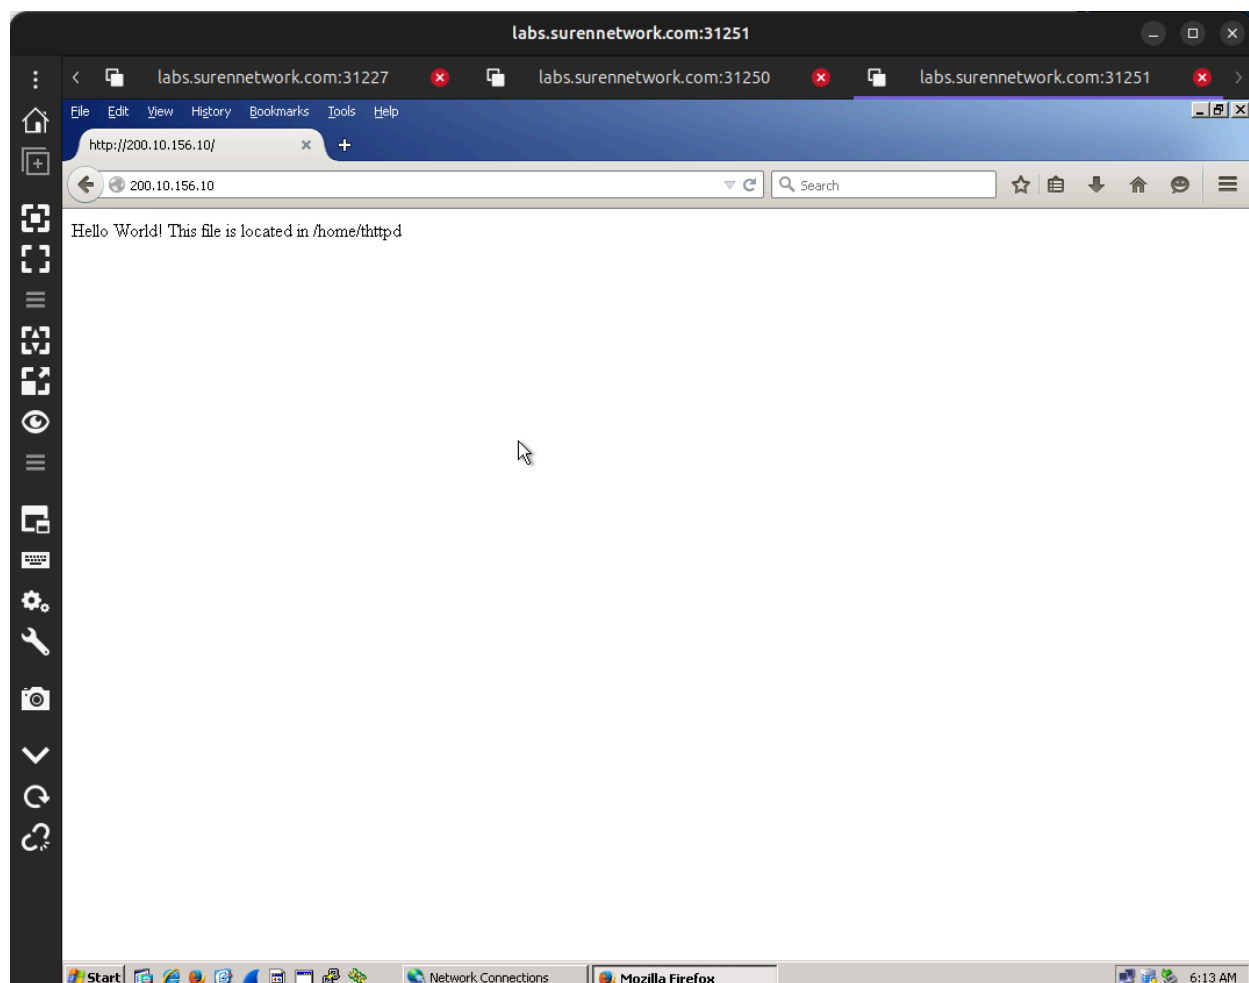


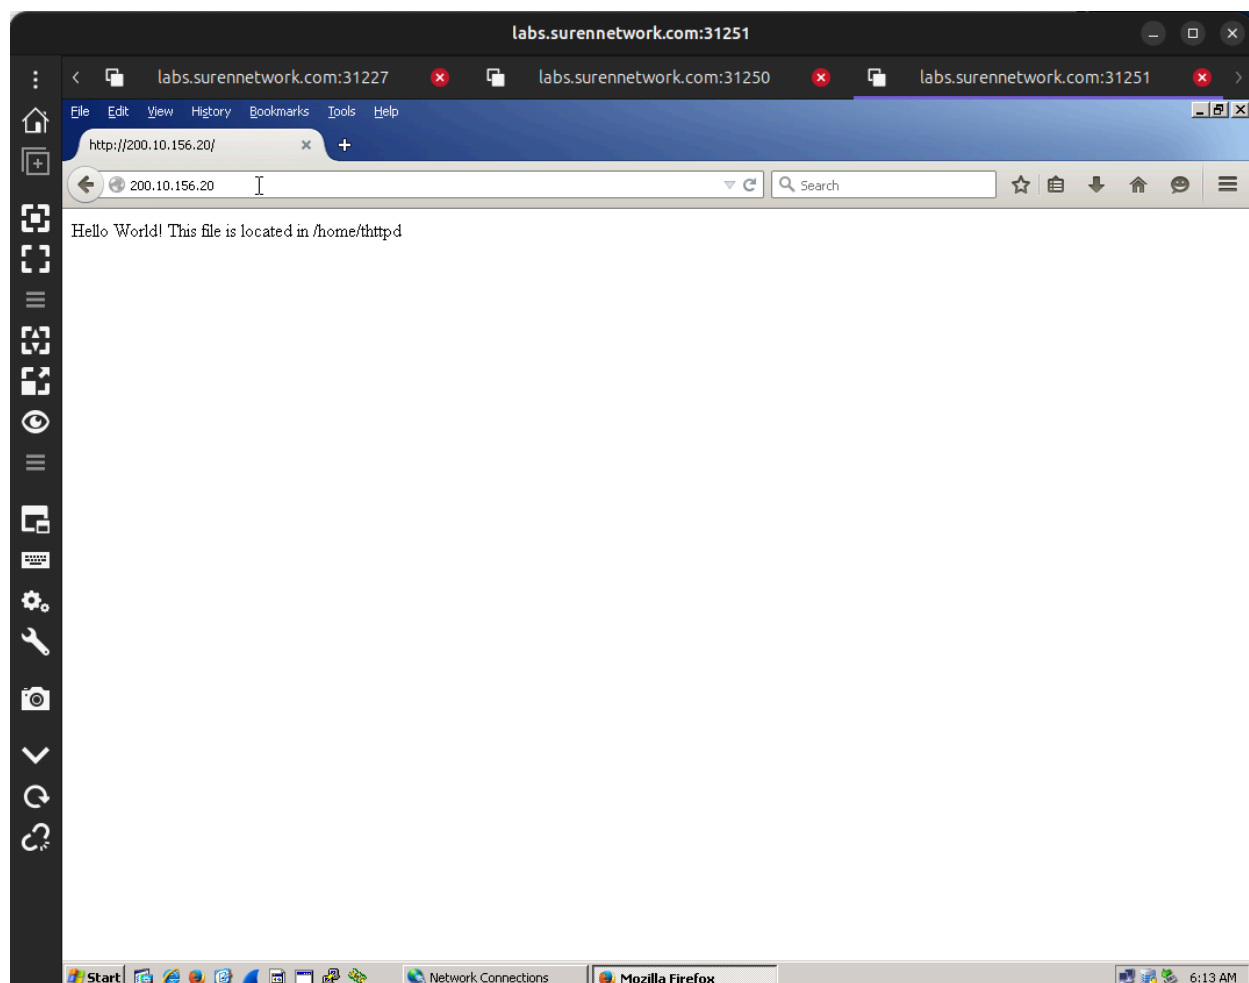


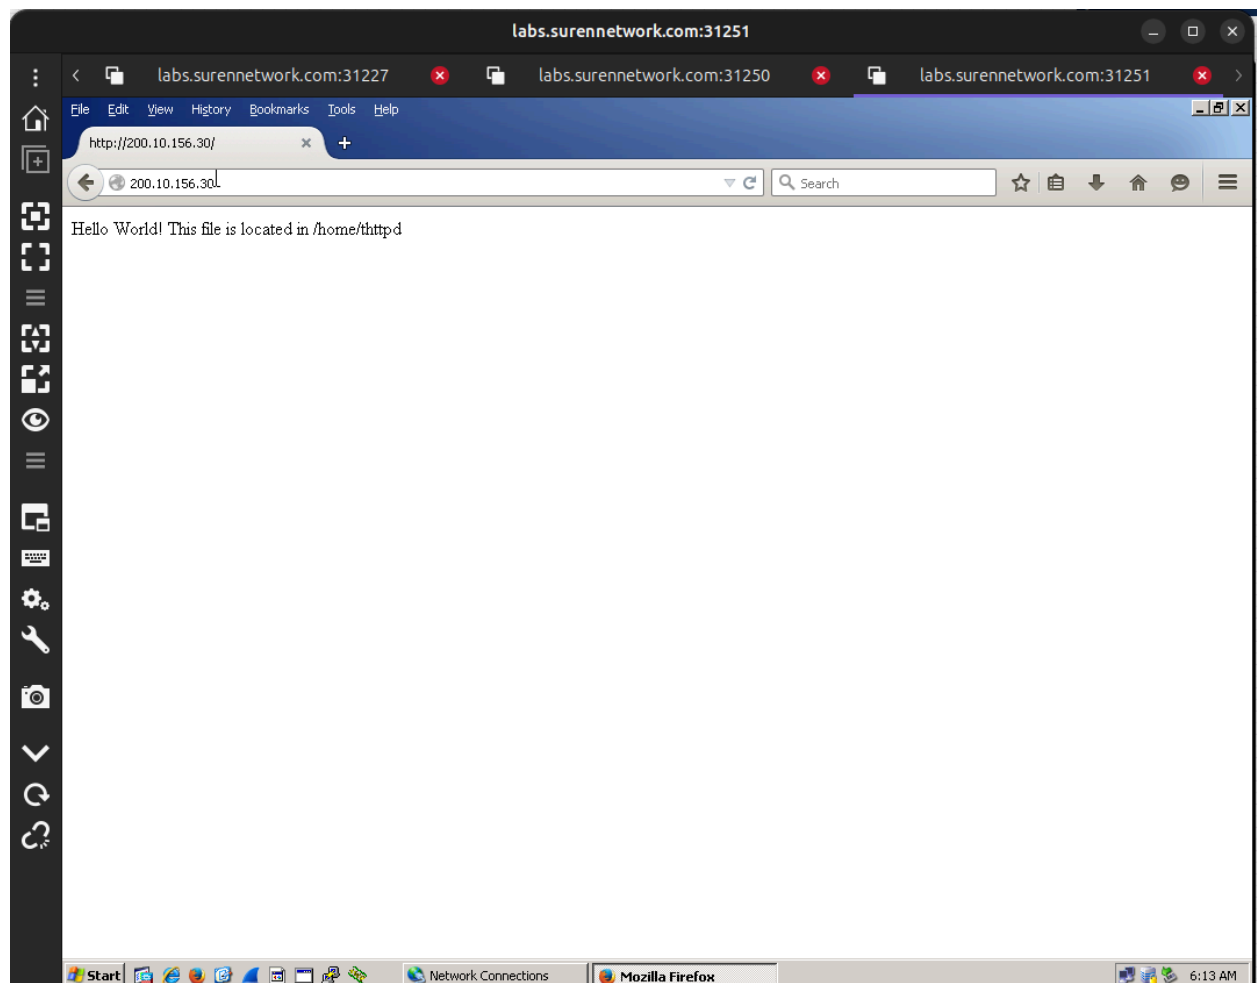


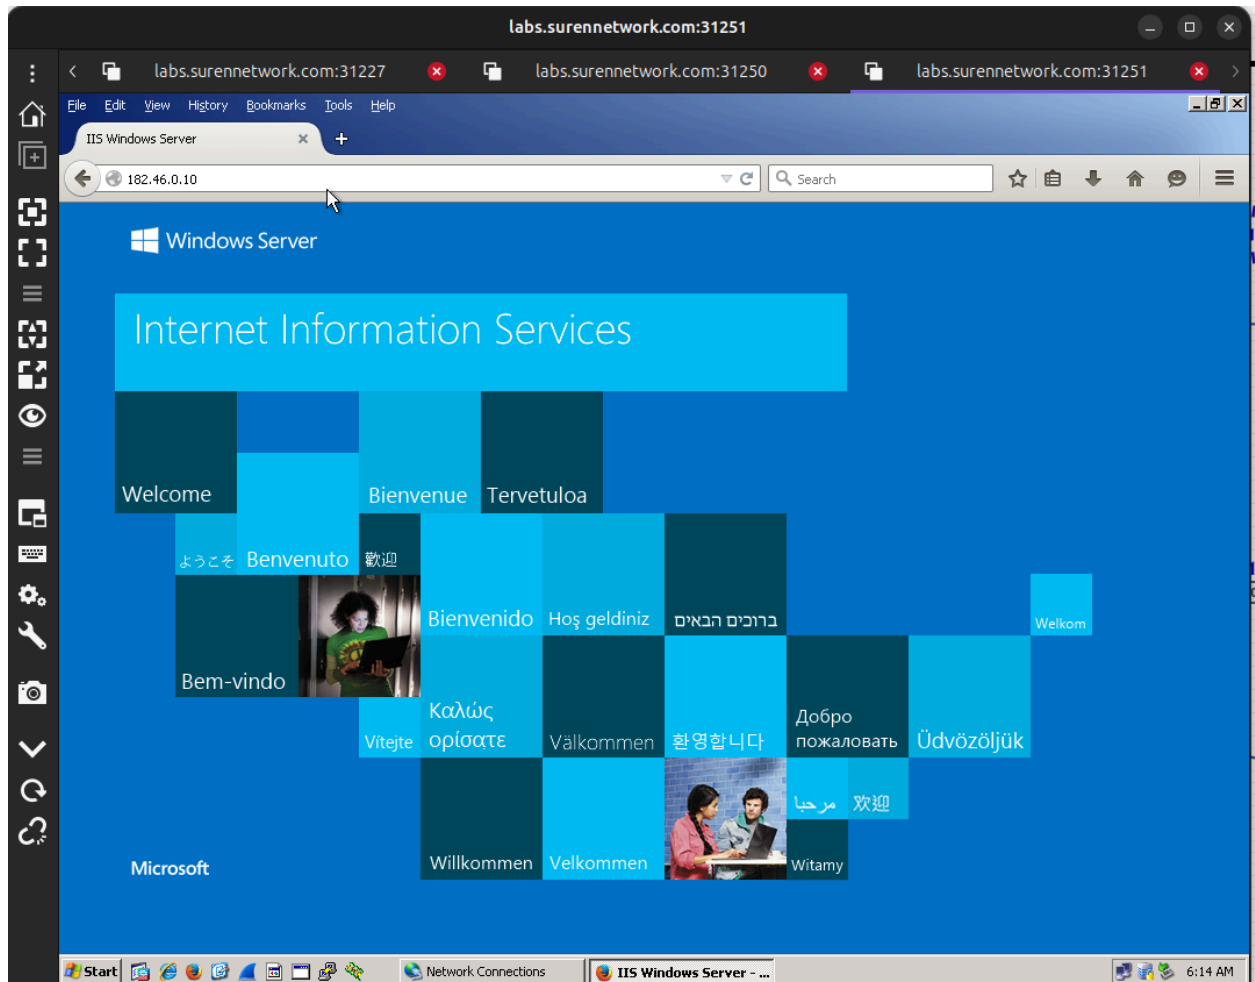


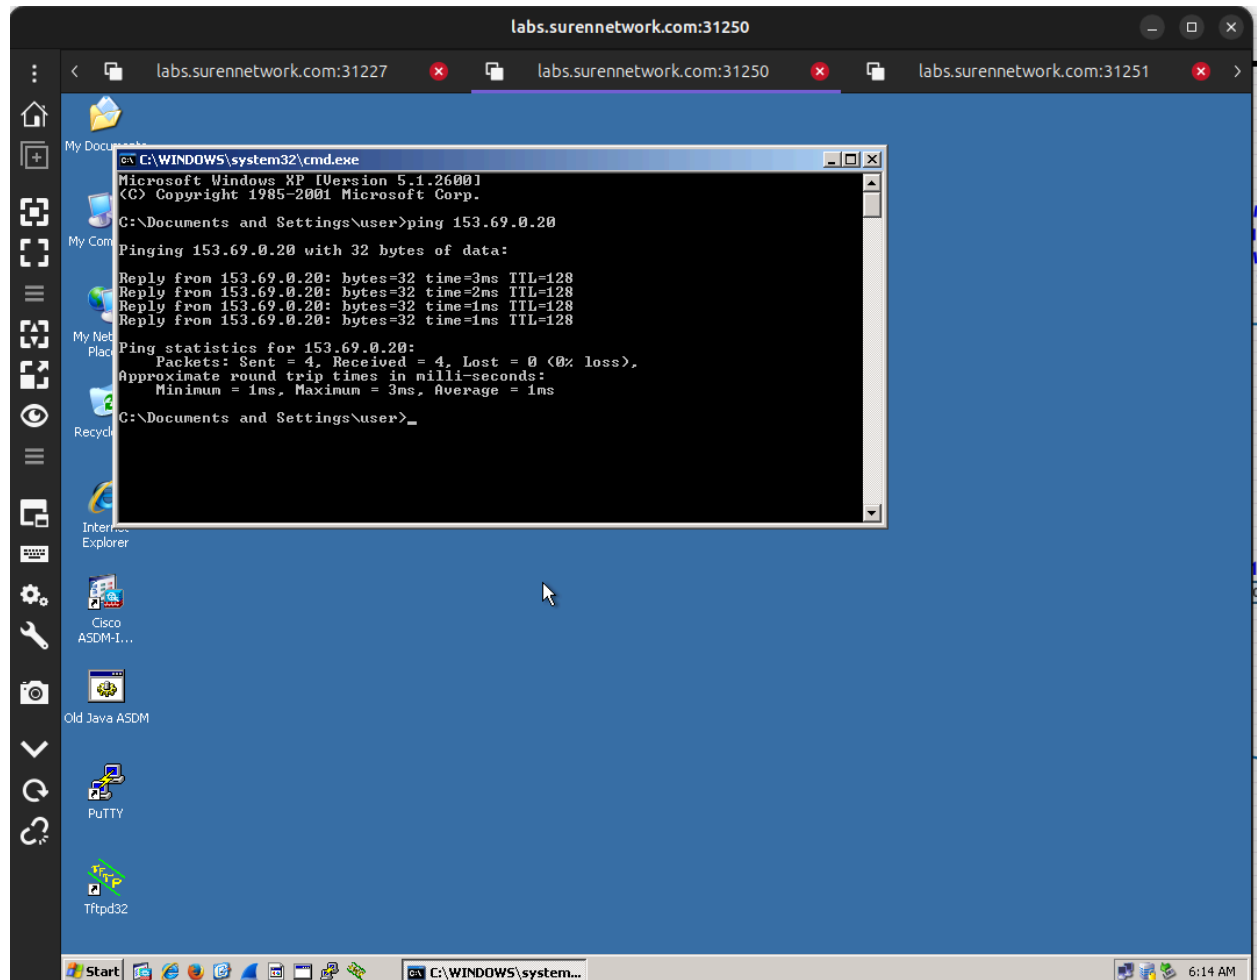


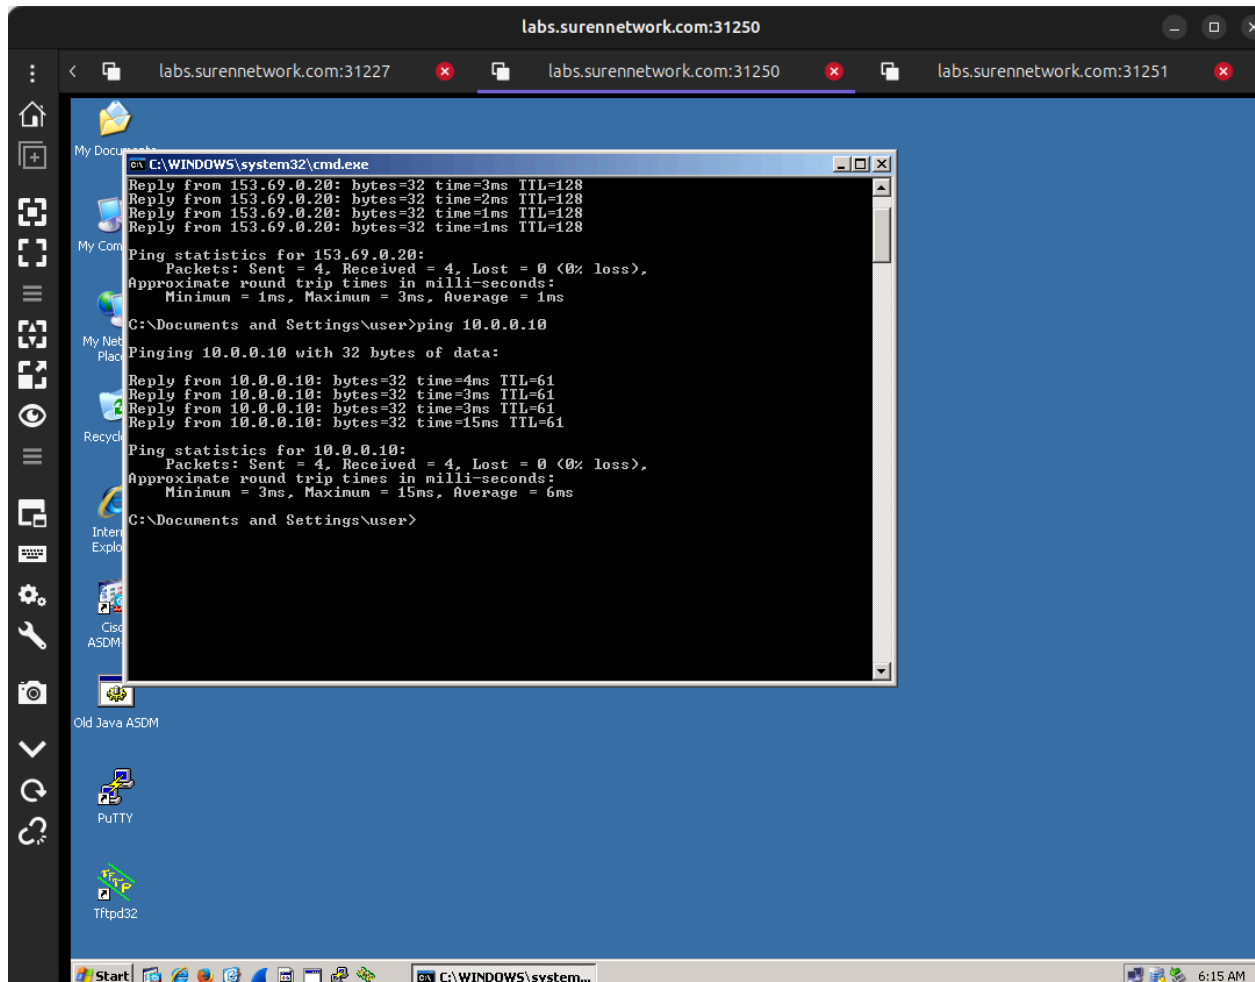


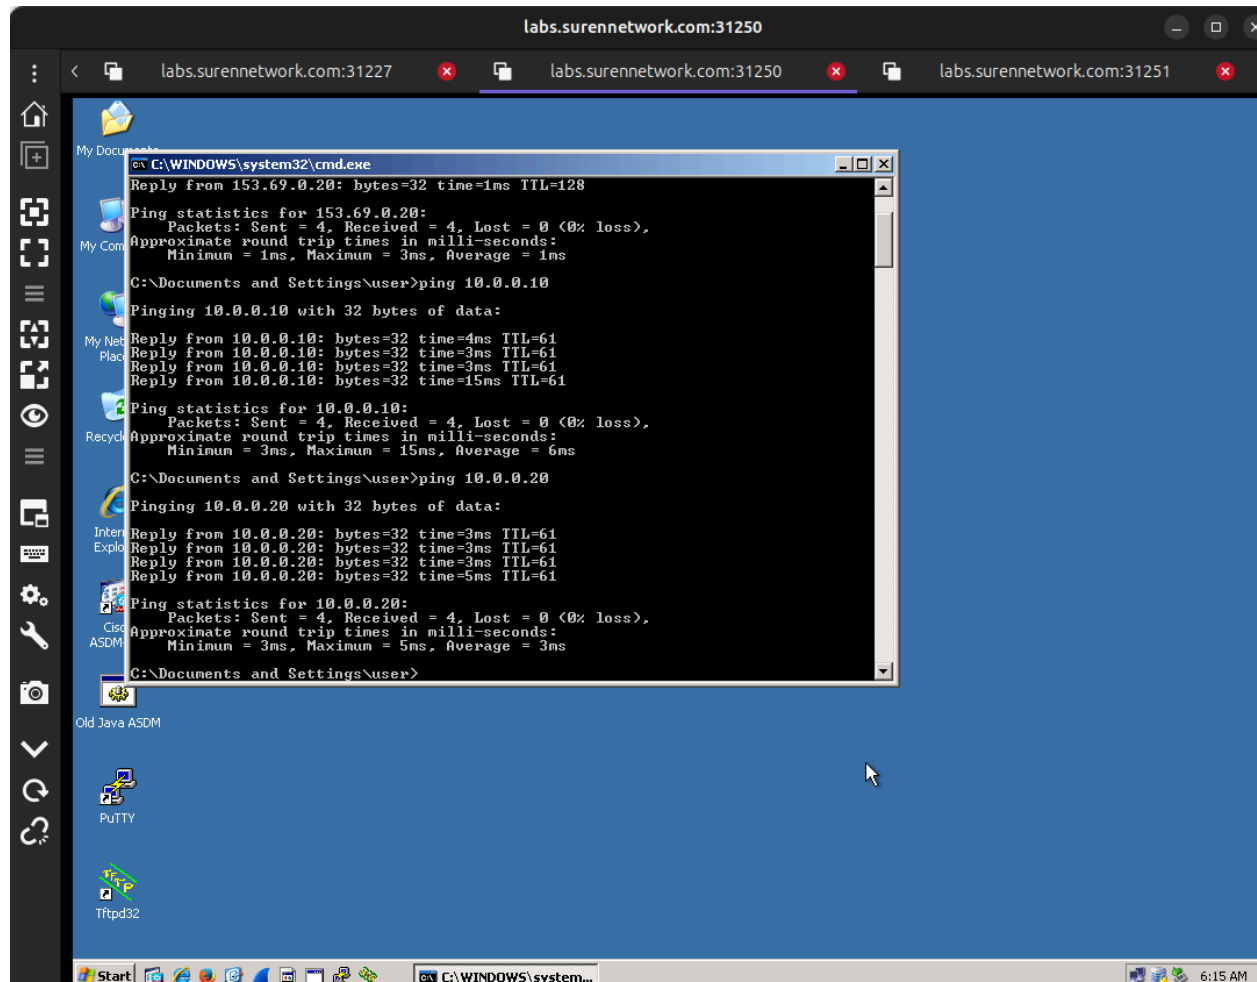


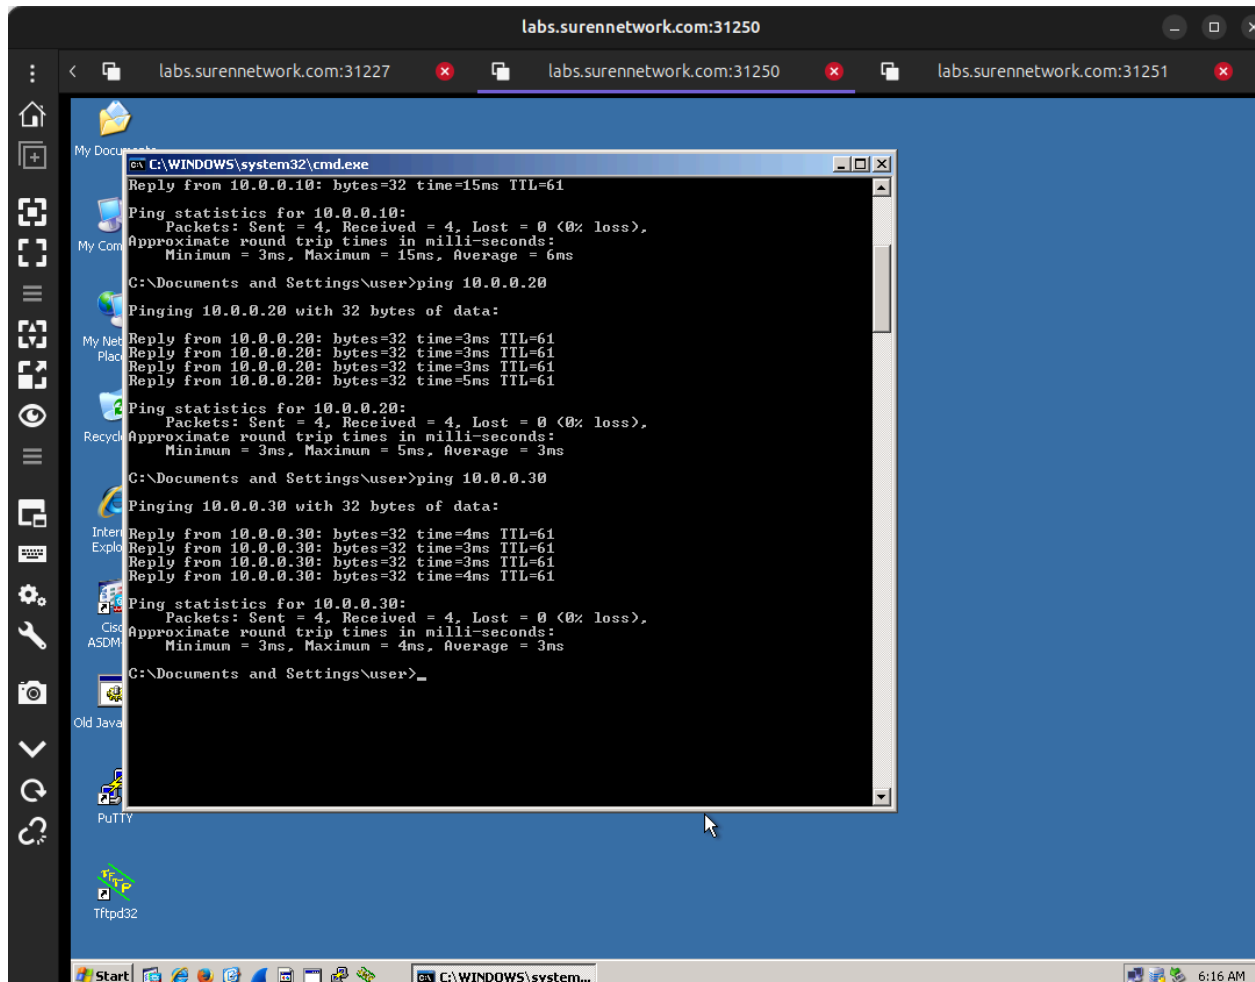


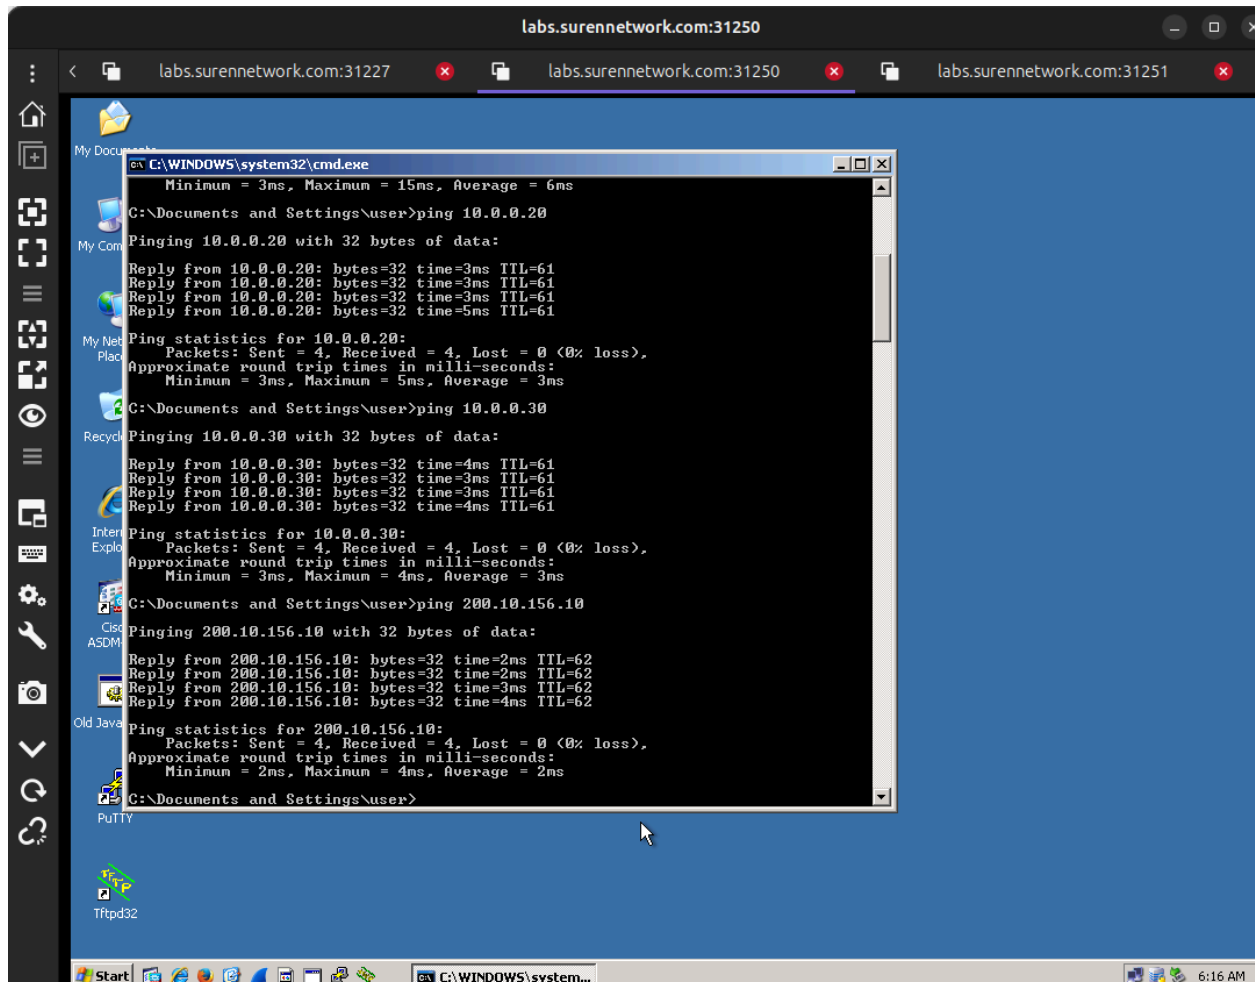


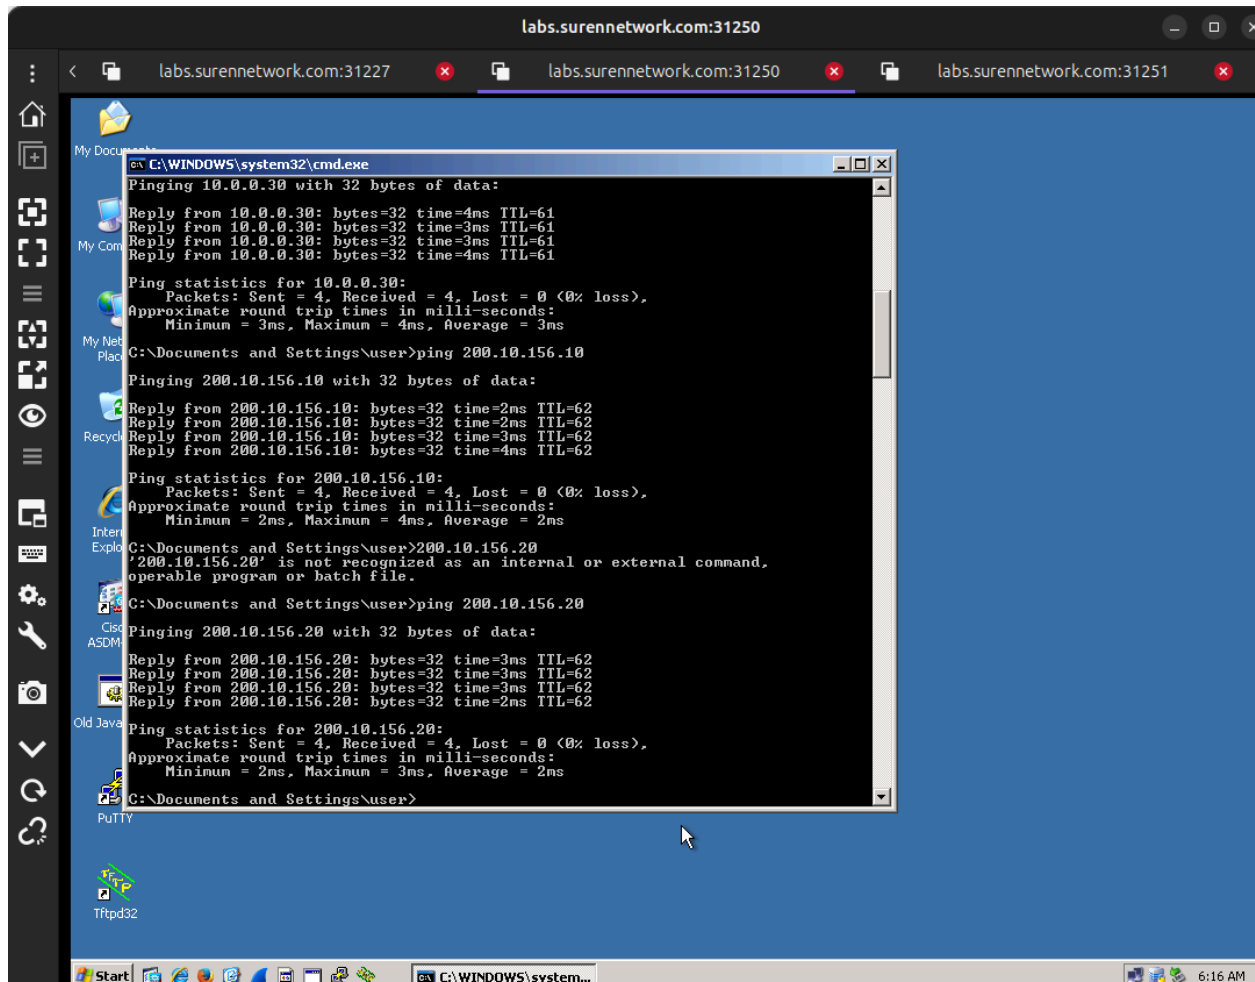


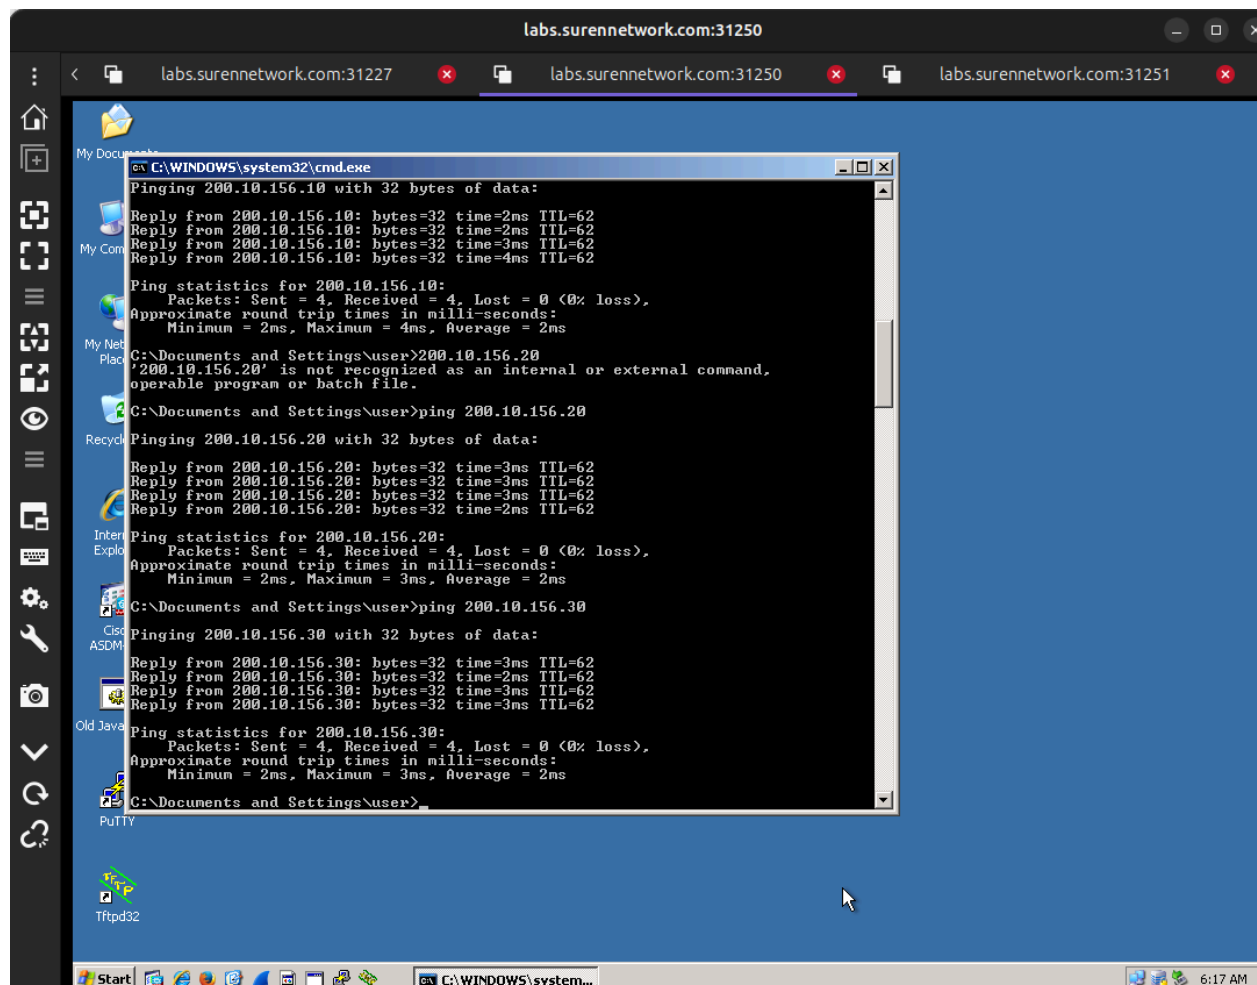

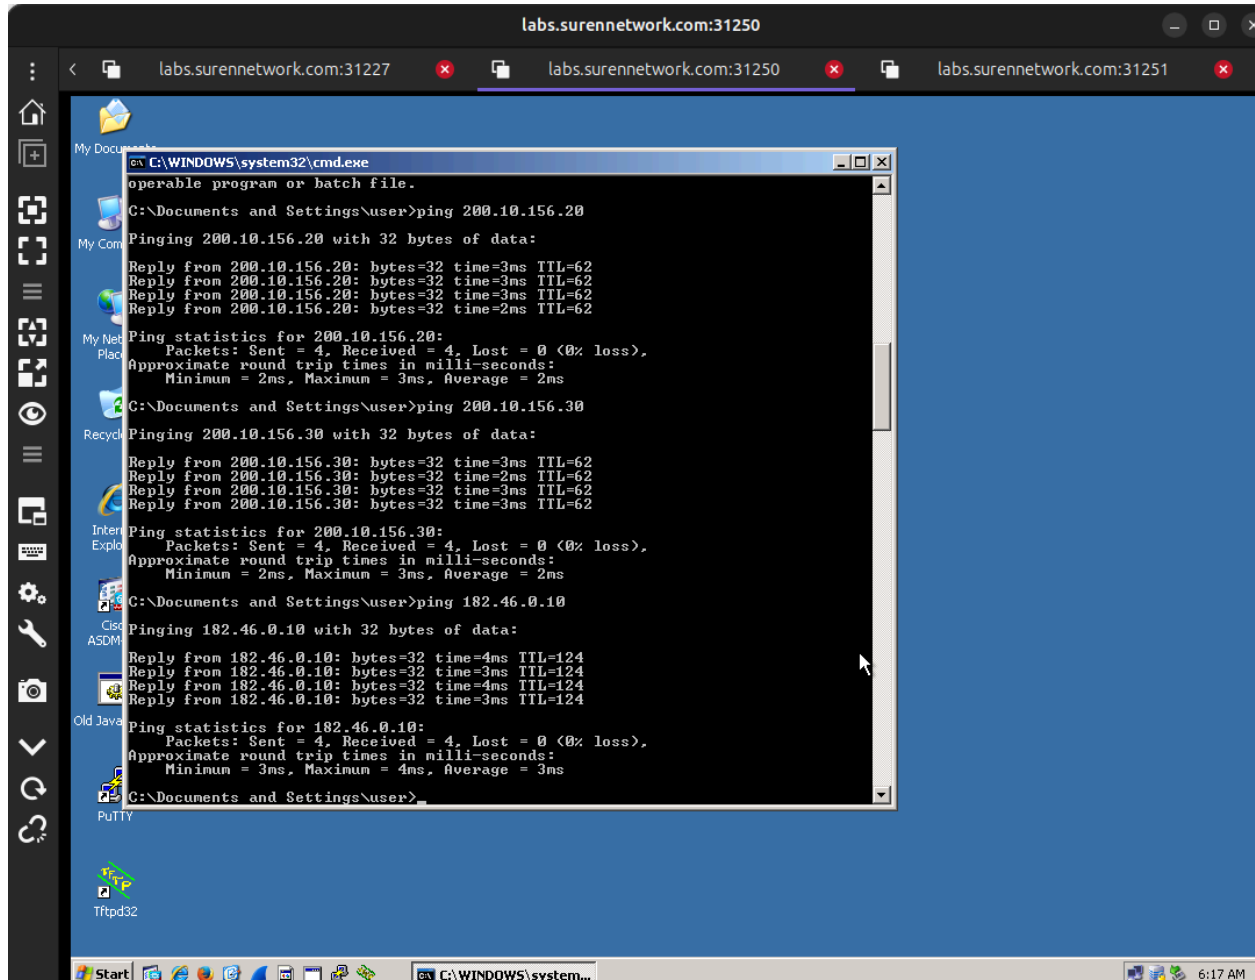

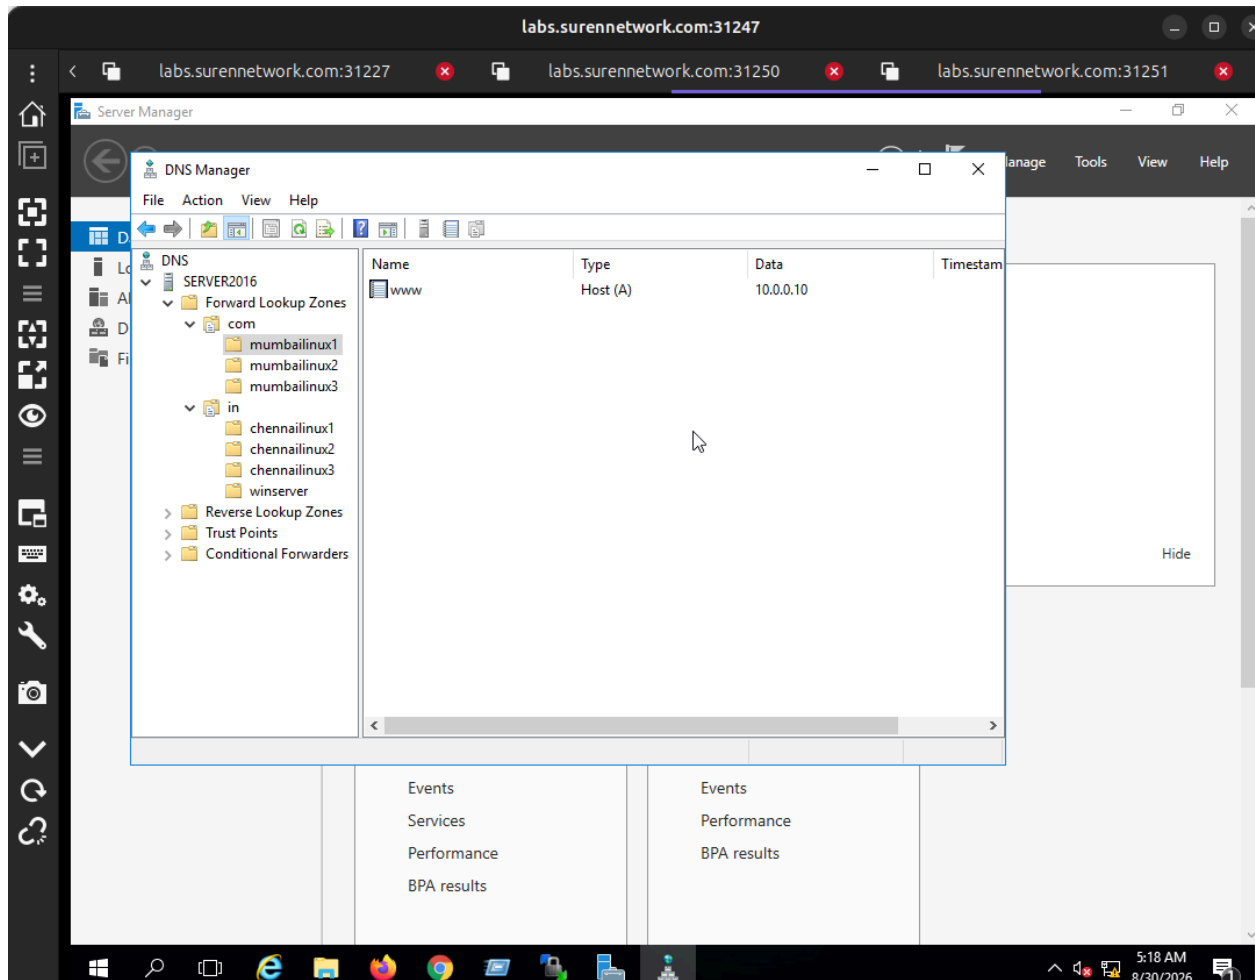

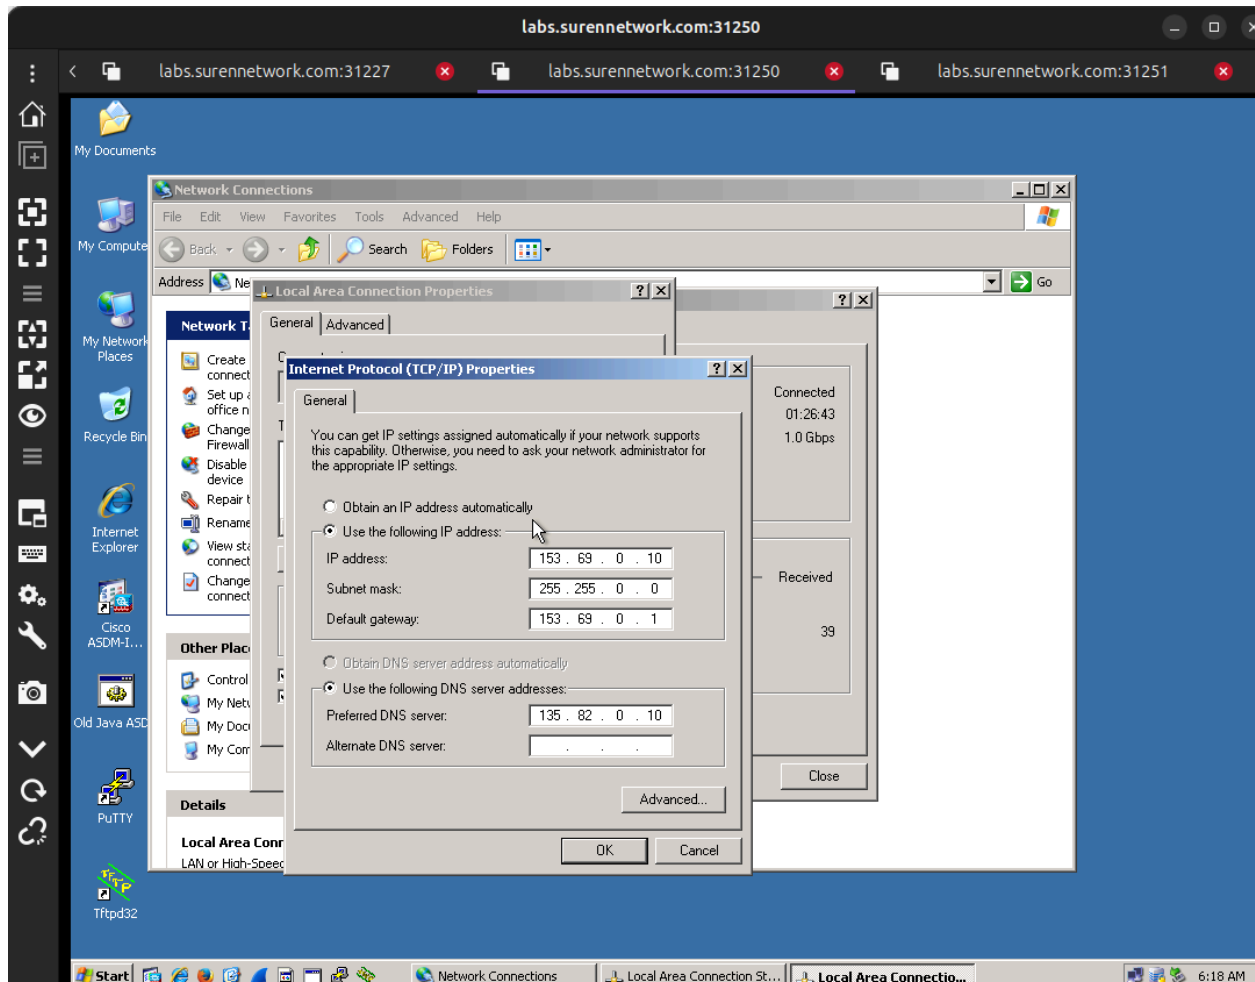

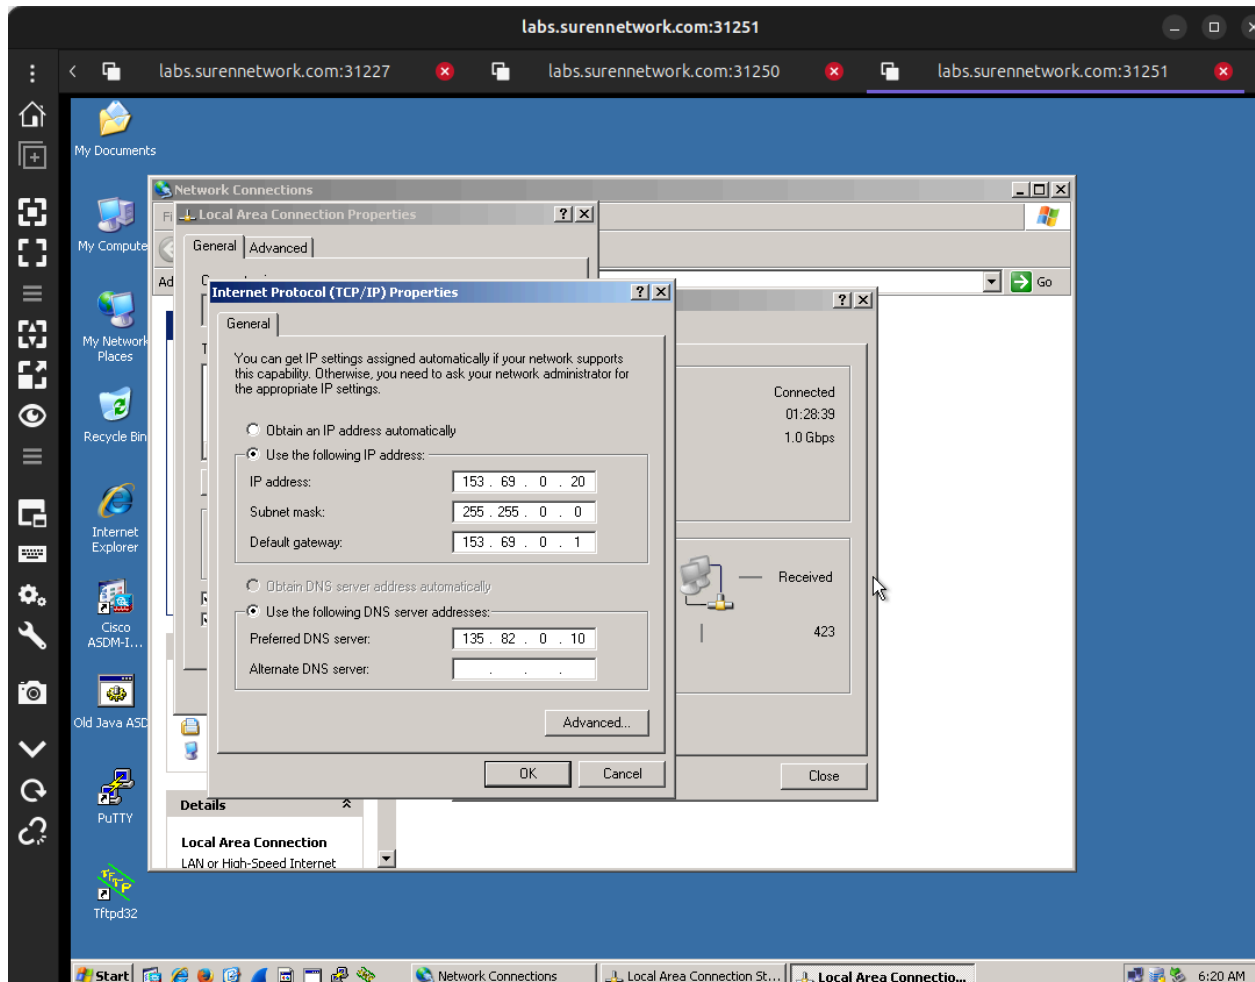

```
R1(config)#ip route 3.0.0.0 255.0.0.0 1.0.0.2
R1(config)#ip route 4.0.0.0 255.0.0.0 1.0.0.2
R1(config)#ip route 5.0.0.0 255.0.0.0 1.0.0.2
R1(config)#ip route 6.0.0.0 255.0.0.0 1.0.0.2
R1(config)#exit
R1#s
*Aug 30 04:36:48.584: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

  1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       1.0.0.0/8 is directly connected, Ethernet0/1
L       1.0.0.1/32 is directly connected, Ethernet0/1
S       2.0.0.0/8 [1/0] via 1.0.0.2
S       3.0.0.0/8 [1/0] via 1.0.0.2
S       4.0.0.0/8 [1/0] via 1.0.0.2
S       5.0.0.0/8 [1/0] via 1.0.0.2
S       6.0.0.0/8 [1/0] via 1.0.0.2
  10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
S      135.82.0.0/16 [1/0] via 1.0.0.2
S      153.69.0.0/16 [1/0] via 1.0.0.2
S      182.46.0.0/16 [1/0] via 1.0.0.2
S      200.10.156.0/24 [1/0] via 1.0.0.2
R1#
```

```
R2(config)#exit
R2#
*Aug 30 04:33:50.612: %SYS-5-CONFIG_I: Configured from console by console
R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    1.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       1.0.0.0/8 is directly connected, Ethernet0/2
L       1.0.0.2/32 is directly connected, Ethernet0/2
    2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       2.0.0.0/8 is directly connected, Ethernet0/1
L       2.0.0.1/32 is directly connected, Ethernet0/1
S       3.0.0.0/8 [1/0] via 2.0.0.2
S       4.0.0.0/8 [1/0] via 2.0.0.2
S       5.0.0.0/8 [1/0] via 2.0.0.2
    6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       6.0.0.0/8 is directly connected, Ethernet0/3
L       6.0.0.1/32 is directly connected, Ethernet0/3
S      10.0.0.0/8 [1/0] via 1.0.0.1
S     135.82.0.0/16 [1/0] via 2.0.0.2
S     153.69.0.0/16 [1/0] via 6.0.0.2
S     182.46.0.0/16 [1/0] via 2.0.0.2
    200.10.156.0/24 is variably subnetted, 2 subnets, 2 masks
C     200.10.156.0/24 is directly connected, Ethernet0/0
L     200.10.156.1/32 is directly connected, Ethernet0/0
R2#
```

```
R3(config)#ip route 6.0.0.0 255.0.0.0 2.0.0.1
R3(config)#ip route 153.69.0.0 255.255.0.0 2.0.0.1
R3(config)#exit
R3#
*Aug 30 04:30:18.798: %SYS-5-CONFIG_I: Configured from console by console
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PFR
```

Gateway of last resort is not set

```
S    1.0.0.0/8 [1/0] via 2.0.0.1
C    2.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    2.0.0.0/8 is directly connected, Ethernet0/0
L    2.0.0.2/32 is directly connected, Ethernet0/0
C    3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    3.0.0.0/8 is directly connected, Ethernet0/1
L    3.0.0.1/32 is directly connected, Ethernet0/1
C    4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    4.0.0.0/8 is directly connected, Ethernet0/2
L    4.0.0.1/32 is directly connected, Ethernet0/2
S    5.0.0.0/8 [1/0] via 4.0.0.2
S    6.0.0.0/8 [1/0] via 2.0.0.1
S    10.0.0.0/8 [1/0] via 2.0.0.1
S    135.82.0.0/16 [1/0] via 4.0.0.2
S    153.69.0.0/16 [1/0] via 2.0.0.1
S    182.46.0.0/16 [1/0] via 3.0.0.2
S    200.10.156.0/24 [1/0] via 2.0.0.1
```

R3#

```
R4(config)#ip route 2.0.0.0 255.0.0.0 3.0.0.1
R4(config)#ip route 4.0.0.0 255.0.0.0 3.0.0.1
R4(config)#ip route 5.0.0.0 255.0.0.0 3.0.0.1
R4(config)#ip route 6.0.0.0 255.0.0.0 3.0.0.1
R4(config)#exit
R4#show
*Aug 30 04:26:00.431: %SYS-5-CONFIG_I: Configured from console by console
R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 3.0.0.1
S    2.0.0.0/8 [1/0] via 3.0.0.1
S    3.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    3.0.0.0/8 is directly connected, Ethernet0/1
L    3.0.0.2/32 is directly connected, Ethernet0/1
S    4.0.0.0/8 [1/0] via 3.0.0.1
S    5.0.0.0/8 [1/0] via 3.0.0.1
S    6.0.0.0/8 [1/0] via 3.0.0.1
S    10.0.0.0/8 [1/0] via 3.0.0.1
S    135.82.0.0/16 [1/0] via 3.0.0.1
S    153.69.0.0/16 [1/0] via 3.0.0.1
S    182.46.0.0/16 is variably subnetted, 2 subnets, 2 masks
C    182.46.0.0/16 is directly connected, Ethernet0/0
L    182.46.0.1/32 is directly connected, Ethernet0/0
S    200.10.156.0/24 [1/0] via 3.0.0.1
R4#
```

```
R5(config)#no ip route 2.0.0.0 255.0.0.0 4.0.0.1
R5(config)#ip route 2.0.0.0 255.0.0.0 4.0.0.1
R5(config)#ip route 3.0.0.0 255.0.0.0 4.0.0.1
R5(config)#ip route 6.0.0.0 255.0.0.0 4.0.0.1
R5(config)#exit
R5#
*Aug 30 04:22:39.026: %SYS-5-CONFIG_I: Configured from console by console
R5#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR
```

Gateway of last resort is not set

```
S    1.0.0.0/8 [1/0] via 4.0.0.1
S    2.0.0.0/8 [1/0] via 4.0.0.1
S    3.0.0.0/8 [1/0] via 4.0.0.1
     4.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    4.0.0.0/8 is directly connected, Ethernet0/1
L    4.0.0.2/32 is directly connected, Ethernet0/1
     5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    5.0.0.0/8 is directly connected, Ethernet0/0
L    5.0.0.1/32 is directly connected, Ethernet0/0
S    6.0.0.0/8 [1/0] via 4.0.0.1
S    10.0.0.0/8 [1/0] via 4.0.0.1
S    135.82.0.0/16 [1/0] via 5.0.0.2
S    153.69.0.0/16 [1/0] via 4.0.0.1
S    182.46.0.0/16 [1/0] via 4.0.0.1
S    200.10.156.0/24 [1/0] via 4.0.0.1
R5#
```

```
R6(config)#ip route 2.0.0.0 255.0.0.0 5.0.0.1
R6(config)#ip route 3.0.0.0 255.0.0.0 5.0.0.1
R6(config)#ip route 4.0.0.0 255.0.0.0 5.0.0.1
R6(config)#ip route 6.0.0.0 255.0.0.0 5.0.0.1
R6(config)#exit
R6#
*Aug 30 04:17:00.422: %SYS-5-CONFIG_I: Configured from console by console
R6#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 5.0.0.1
S    2.0.0.0/8 [1/0] via 5.0.0.1
S    3.0.0.0/8 [1/0] via 5.0.0.1
S    4.0.0.0/8 [1/0] via 5.0.0.1
     5.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     5.0.0.0/8 is directly connected, Ethernet0/1
L     5.0.0.2/32 is directly connected, Ethernet0/1
S    6.0.0.0/8 [1/0] via 5.0.0.1
S   10.0.0.0/8 [1/0] via 5.0.0.1
     135.82.0.0/16 is variably subnetted, 2 subnets, 2 masks
C     135.82.0.0/16 is directly connected, Ethernet0/0
L     135.82.0.1/32 is directly connected, Ethernet0/0
S   153.69.0.0/16 [1/0] via 5.0.0.1
S   182.46.0.0/16 [1/0] via 5.0.0.1
S   200.10.156.0/24 [1/0] via 5.0.0.1
R6#
```

```
R7(config)#ip route 1.0.0.0 255.0.0.0 6.0.0.1
R7(config)#ip route 10.0.0.0 255.0.0.0 6.0.0.1
R7(config)#ip route 182.46.0.0 255.255.0.0 6.0.0.1
R7(config)#
R7(config)#exit
R7#show
*Aug 30 04:13:05.942: %SYS-5-CONFIG_I: Configured from console by console
R7#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    1.0.0.0/8 [1/0] via 6.0.0.1
S    2.0.0.0/8 [1/0] via 6.0.0.1
S    3.0.0.0/8 [1/0] via 6.0.0.1
S    4.0.0.0/8 [1/0] via 6.0.0.1
S    5.0.0.0/8 [1/0] via 6.0.0.1
     6.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C     6.0.0.0/8 is directly connected, Ethernet0/1
L     6.0.0.2/32 is directly connected, Ethernet0/1
S    10.0.0.0/8 [1/0] via 6.0.0.1
S    135.82.0.0/16 [1/0] via 6.0.0.1
     153.69.0.0/16 is variably subnetted, 2 subnets, 2 masks
C     153.69.0.0/16 is directly connected, Ethernet0/0
L     153.69.0.1/32 is directly connected, Ethernet0/0
S    182.46.0.0/16 [1/0] via 6.0.0.1
S    200.10.156.0/24 [1/0] via 6.0.0.1
R7#
```