


F-901 FIRED HEATER DECOKING

SINGLE TRIMAX / TRIPLE MODE OPERATION

EXXONMOBIL BAYTOWN — PS8 (KHF)

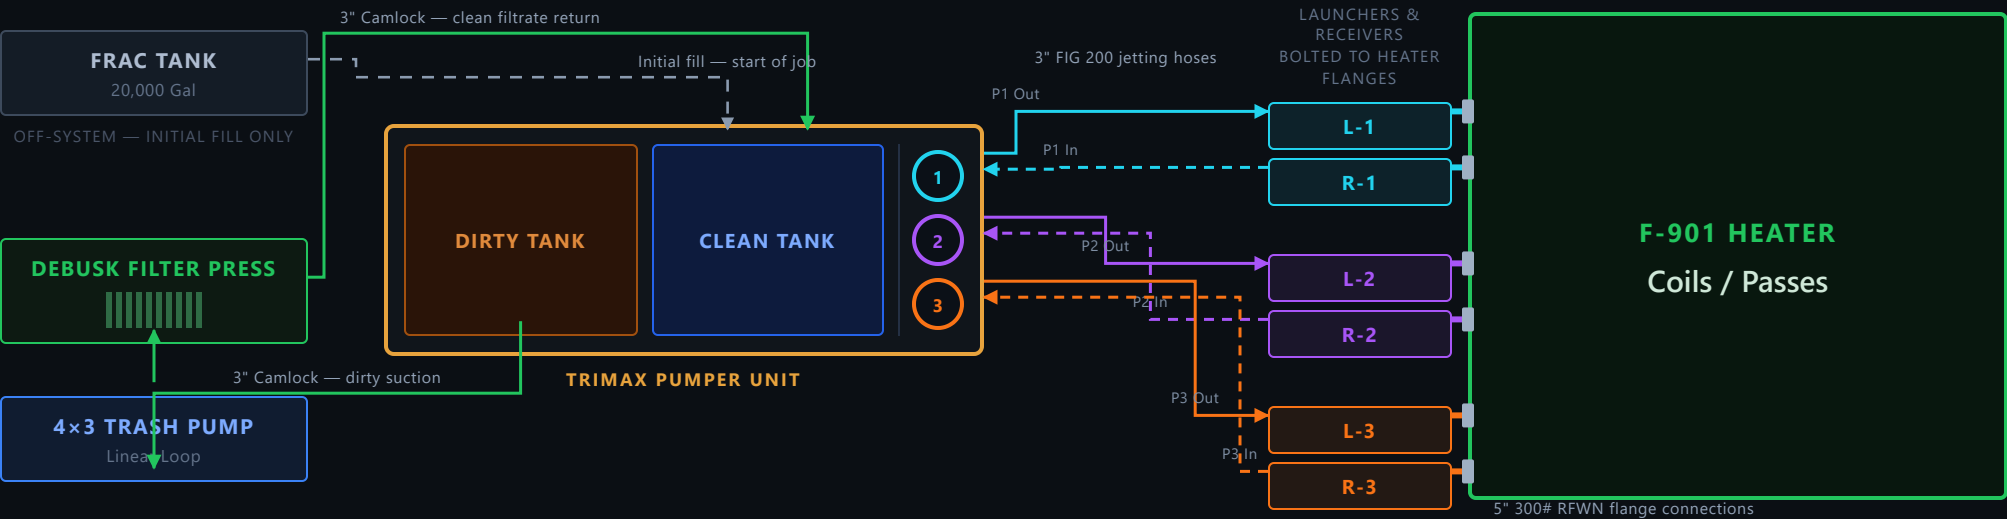

CIRCUIT ASSIGNMENTS

- Pass 1 — Process Coils (Convection + Radiant)**
Two coils looped via JS-1 | 3,168 ft | 5.043" ID
- Pass 2 — Treat Gas**
Single Pass | 896 ft | 5.043" ID
- Pass 3 — Superheat Steam**
Single Pass | 136 ft | 5.047" ID

HEATER ARCHITECTURE

- Connections:** 5" 300# RFWN
- Launchers/Receivers:** 6 Total (Grade Level)
- Adapters:** 5" x 6" 300# RFWN
- Pig Sizing Increment:** 1/8" per pass
- Max Pig OD:** 5.25" (rule cap: 5.043" ID + 0.250", rounded down)

EQUIPMENT SCOPE

- TriMax:** 1 Unit (Triple Mode)
- Water Source:** 1x 20,000 Gal Frac Tank (initial fill)
- Filtration:** 1x DeBusk Filter Press
- Transfer:** 1x 4x3 Trash Pump (Linear loop)
- Inspection:** Steady-Flux Smart Pigging