

## SECTION A–A (z across): above at 0° (the blades), below at 210° (a tie rod, a dowel)  1:2

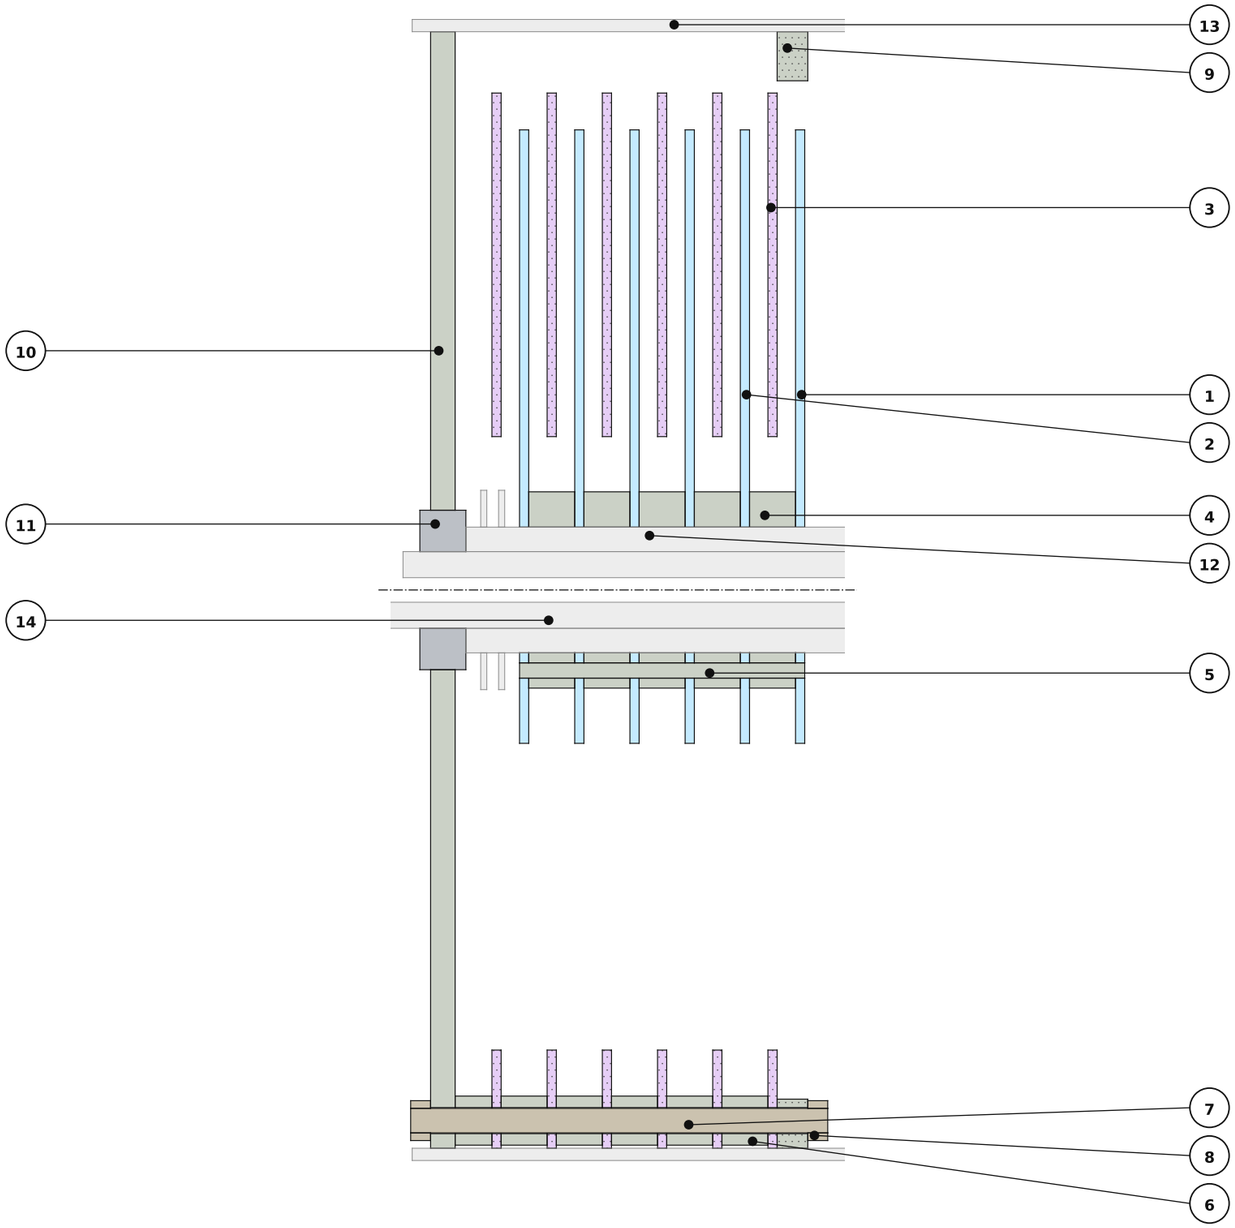


| REVISIONS | | |
|---|---|---|
| Rev | Date | Description |
| A | 2026-10-11 | First issue, draft for quotation |

**PARTS LIST**

| item | drawing | description | material | qty |
|---|---|---|---|---|
| 1 | CAP-602 | rotor vane, first (r01) | Al | 1 |
| 2 | CAP-601 | rotor vane (r03-r11) | Al | 5 |
| 3 | CAP-603 | stator vane (s02-s12) | Al | 6 |
| 4 | CAP-604 | rotor-vane spacer ring | G10 | 5 |
| 5 | CAP-605 | dowel | G10 | 3 |
| 6 | CAP-606 | stator spacer tube | G10 | 36 |
| 7 | P-008 | tie rod M8 | glass-epoxy | 6 |
| 8 | P-008 | nut M8 | glass-epoxy | 12 |
| 9 | CAP-607 | end ring | G10 | 1 |
| 10 | BRG-810 | Ca\|reluctance spider | G10 | 1 |
| 11 | P-001 | Ca\|reluctance bearing | — | 1 |
| 12 | SHF-304/-307 | rotor sleeve, sheds (for reference) | — | ref. |
| 13 | CGE-901 | cage (for reference) | — | ref. |
| 14 | SHF-301 | shaft (for reference) | — | ref. |

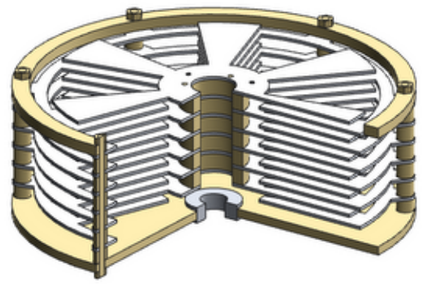

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

**NOTES**

1. Rotor: the six rotor vanes and five G10 spacer rings bonded on the sleeve, aligned by three G10 dowels (90°, 210°, 330°); r01 carries the node-1 comb's posts (CAP-610).
2. Counter-rotor: the six stator vanes on six glass-epoxy tie rods M8 at r 173 with G10 spacer tubes, from the end ring (bonded in the cage's bore) to the Ca|reluctance spider; nuts finger-tight + 1/4 turn [IR].
3. The gaps: 6 mm between every rotor and stator vane (gauge them at the six blades); the rims 12 mm or more from any G10 (sim/doubler-caps-findings.md §2).
4. Side B (C2) is the mirror, its stator vanes in phase with C1's.

DCCREG turbine · the doubler: C1 / C2

| | | |
|---|---|---|
| **C1 / C2 varicap stack, side A** | | Drawing no. |
| Material: | | **DCCREG-CAP-600** |
| Mass: — | Qty per machine: 2 | Rev A  Sheet 32 of 103  A3 |
| Scale: 1:2 | Tolerances: ISO 2768-mK | Date: 2026-10-11 |
| Drawn: generated by docs/make_drawing_set.py | Checked: —  Approved: — | **PROPOSED · DRAFT** |