
PLAN, the cut at |z| 48 (the sticks' axis), seen from +z 1:2

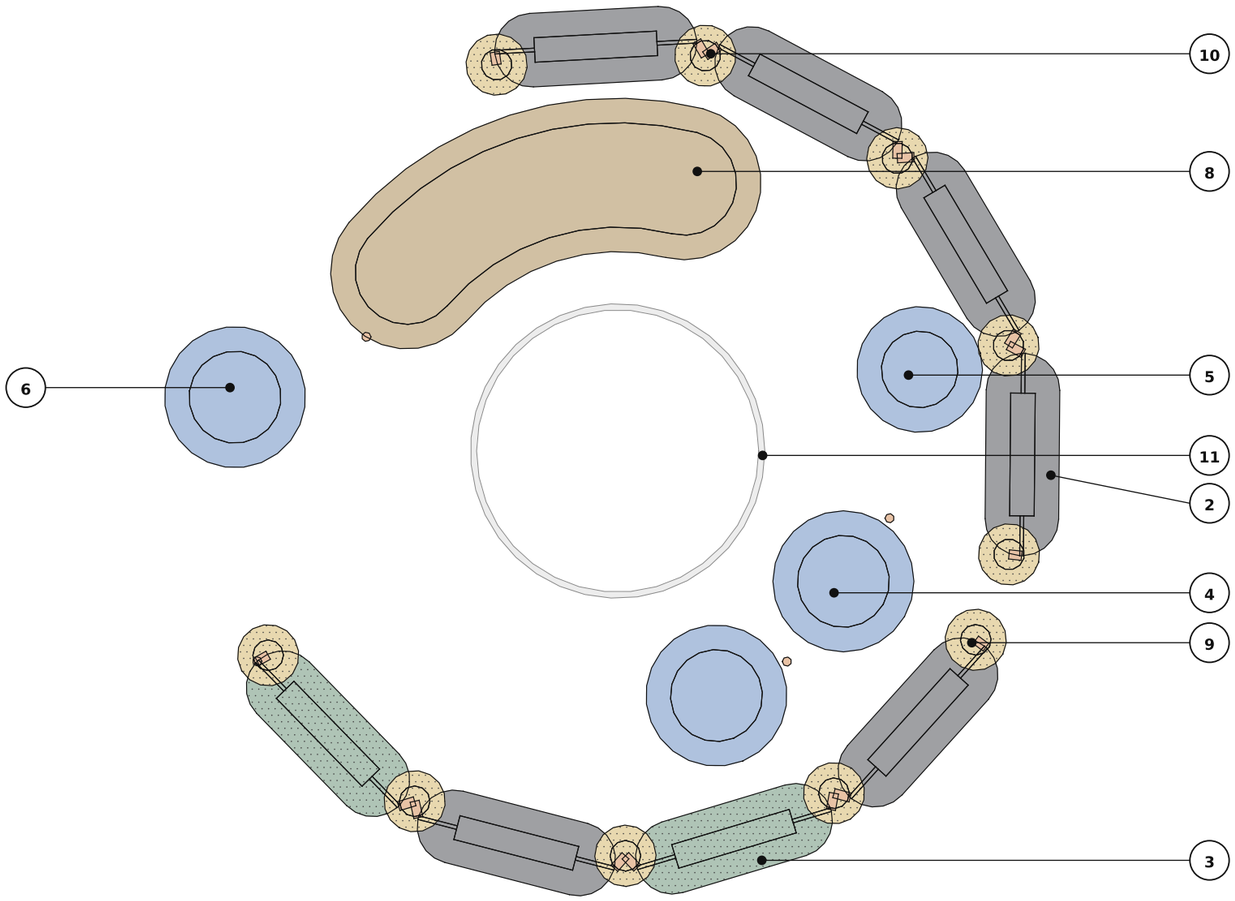


REVISIONS

Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	DCK-502	deck plate	G10	1
2	DCK-504	rectifier stick module (D1 D3 D5 D8 D11 D12)	2CL77 + silicone	6
3	DCK-505	surge resistor module (R1 R3)	22 kΩ + silicone	2
4	DCK-506	capacitor module C3 / C6	190 pF + silicone	2
5	DCK-507	capacitor module C8	100 pF + silicone	1
6	DCK-508	capacitor module Csa	100 pF + silicone	1
7	P-003 / P-004	screw terminals of the capacitors	brass	8
8	DCK-509	clamp string module Z1	66 × 1.5KE200A + silicone	1
9	DCK-503	junction terminal and block	brass + silicone	10
10	DCK-501	leads, straps and wires	Cu / PTFE HV wire	32
11	CAN-401	the can (for reference)	—	ref.

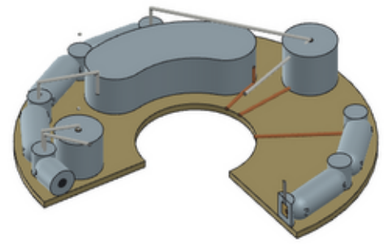

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

NOTES

1 Each part sits in the study's plan: the sticks along the outer lane r 132, the others as placed; every part potted, 8 mm of silicone over it (sim/parts-first-cut-findings.md §5).
2 Deck B is the mirror about -21.3° (sim/multiplier_layout.py MIRROR, PART_MIRROR): D2 for D1 and so on.
3 The plate is bonded on the can's outside, |z| 30-36 (sim/multiplier_layout.py DECK_Z0, DECK_T); its two 6 mm holes pass the cross nets l1 / r1 to deck B.
4 Pot the deck as one: the junctions' blocks, the leads over the parts and the straps to the can inside the same pour; no void (vacuum-cast, then pressure-cure).

DCCREG turbine · deck A (deck B the mirror)

Deck A, its parts potted on the G10 plate		Drawing no.
Material:		**DCCREG-DCK-500**
Mass: —	Qty per machine: 2	Rev A Sheet 22 of 103 A3
Scale: 1:2	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**PROPOSED · DRAFT**