
SECTION A–A 1:1



REVISIONS		
Rev	Date	Description
A	2026-10-11	First issue, draft for quotation

PARTS LIST

item	drawing	description	material	qty
1	HUB-202	vessel, borosilicate	borosilicate 3.3	1
2	HUB-201	ring A / ring B, Cu foil bands	Cu-ETP 0.1 mm	2
3	HUB-201	beads, Cu wire rings	Cu-ETP	4
4	—	interface gel, 0.5 mm	silicone gel	1
5	HUB-203	retainer	PEEK	1
6	HUB-204	shaft coupler	G10	1
7	P-007	AH core	77 MnZn	2
8	HUB-205	AH former	G-10	2
9	HUB-206	AH coil	Cu	2
10	SHF-303	shaft-half flange	1.4404	2

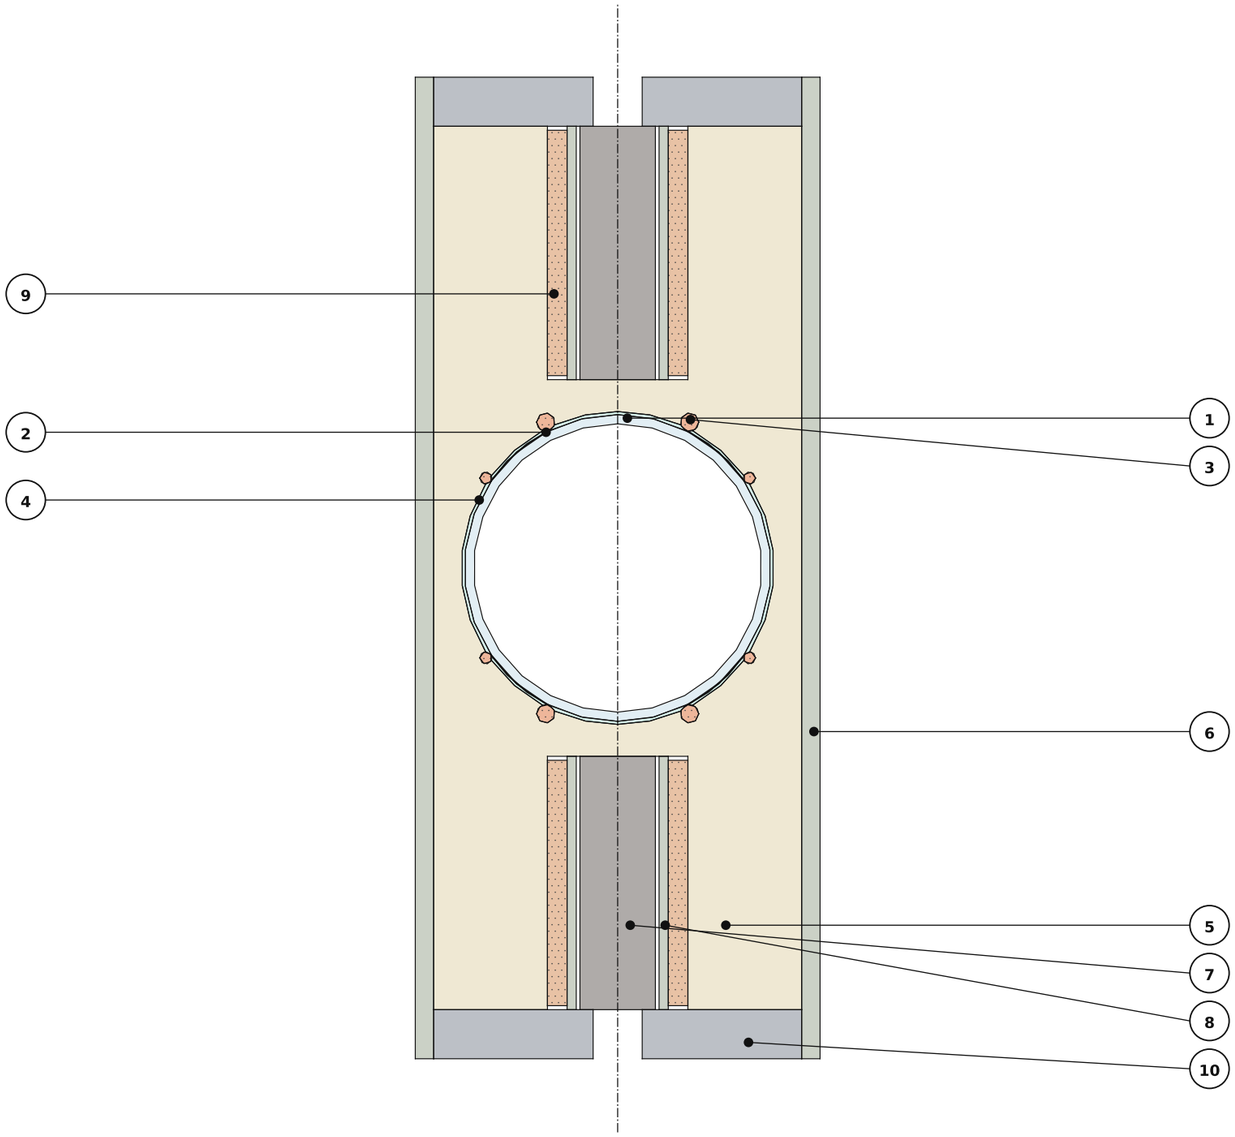

3-D view, a quarter cut away; the reference parts left out (axonometric, not to scale)

NOTES

1 Build order: the rings and beads on the vessel (HUB-201); the vessel in the retainer's pocket, the gel vacuum-cast 0.5 mm into it (presets/hub-locked.json interface_filler); the AH cores and coils in their seats; the coupler bonded over the retainer and both flanges.
2 The flanges are turned to Ø60 to sit in the coupler's bore (docs/rings-design.md §2); bonded and pinned.
3 The rings' leads leave through the coupler's channels to the can's bushings (CAN-400).

DCCREG turbine · the hub

Hub, locked, in its coupler		Drawing no.
Material:		**DCCREG-HUB-200**
Mass: —	Qty per machine: 1	Rev A Sheet 3 of 103 A3
Scale: 1:1	Tolerances: ISO 2768-mK	Date: 2026-10-11
Drawn: generated by docs/make_drawing_set.py	Checked: — Approved: —	**LOCKED DESIGN · DRAFT**