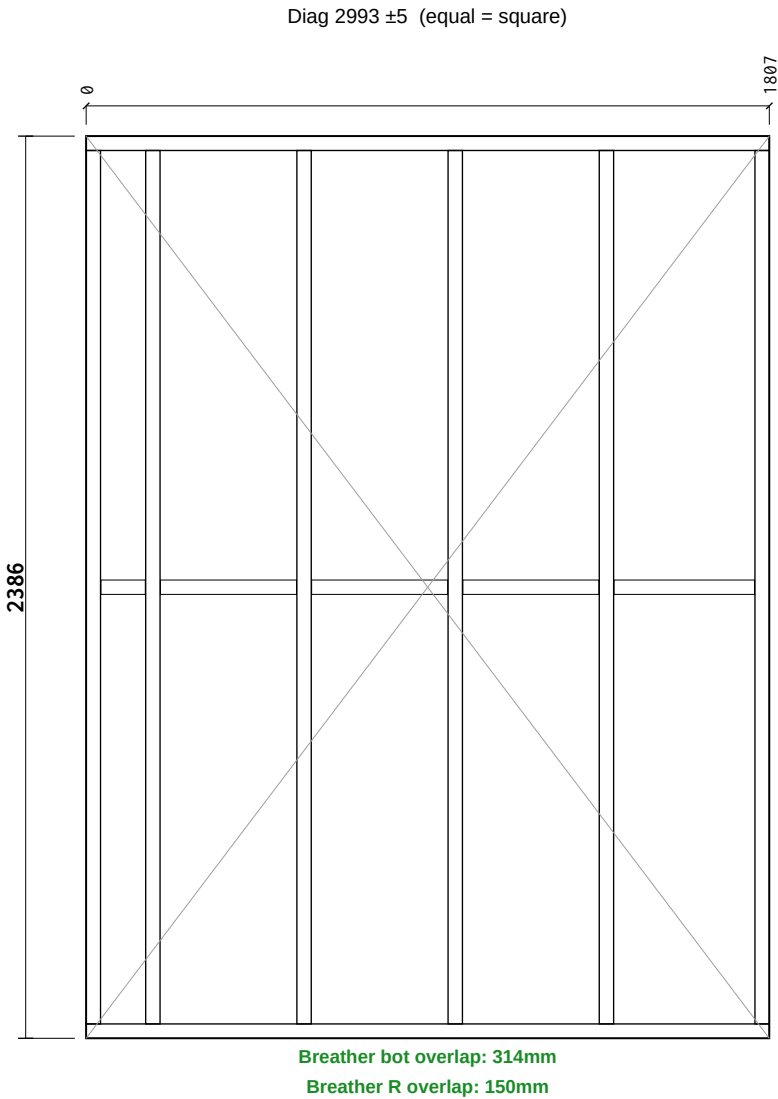


Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1807	0	0	1
TR1 Top Rail	38×89 C16	1807	0	0	1
ES1 End Stud	38×89 C16	2310	0	0	1
ES2 End Stud	38×89 C16	2310	0	0	1
VS1 Vertical Stud	38×89 C16	2310	0	0	4
NG1 Noggin	38×89 C16	372	0	0	1
NG2 Noggin	38×89 C16	360	0	0	3
NG3 Noggin	38×89 C16	118	0	0	1
Total: 13 pcs / 19.04 m					

Sheathing & Insulation

Material	W	HLabel
----------	---	--------

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails

Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm


Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.




Breather Membrane:
Laps 100mm horizontal / 150mm vertical, upper lapping lower.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.

KEY PLAN



Revisions (Rev · Date · Note):		C01 - Construction issue					
Date:	2026-09-13	Scale:	1:20	Drawn:	TS	Checked:	
Project Name:		MP Adams Plot 3, Eckington					
Site:	Eckington			Client:	MP Adams		
Title:	Panel Fabrication — 38 x 140 C16 CLS						
Project Number:	P3			Revision:	C01		
Panel No:	GF-IN1			Drawing No:	P3-MF-GF-IN1		
Panel L×H×T:	1807×2386×89			Weight:	27 kg		
Status:	CONSTRUCTION			Sheet:	1 / 1		

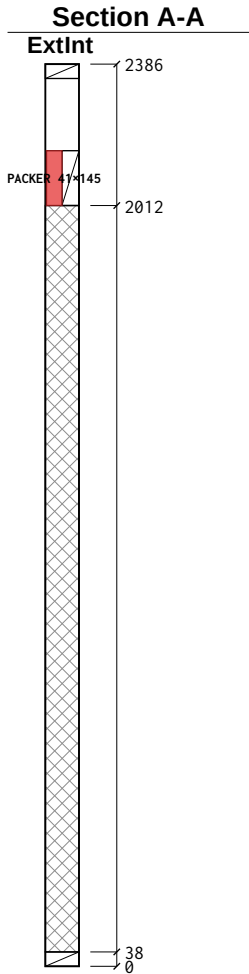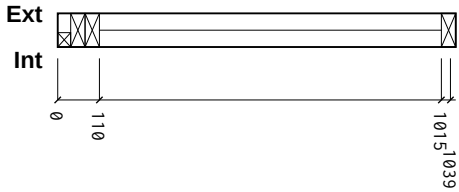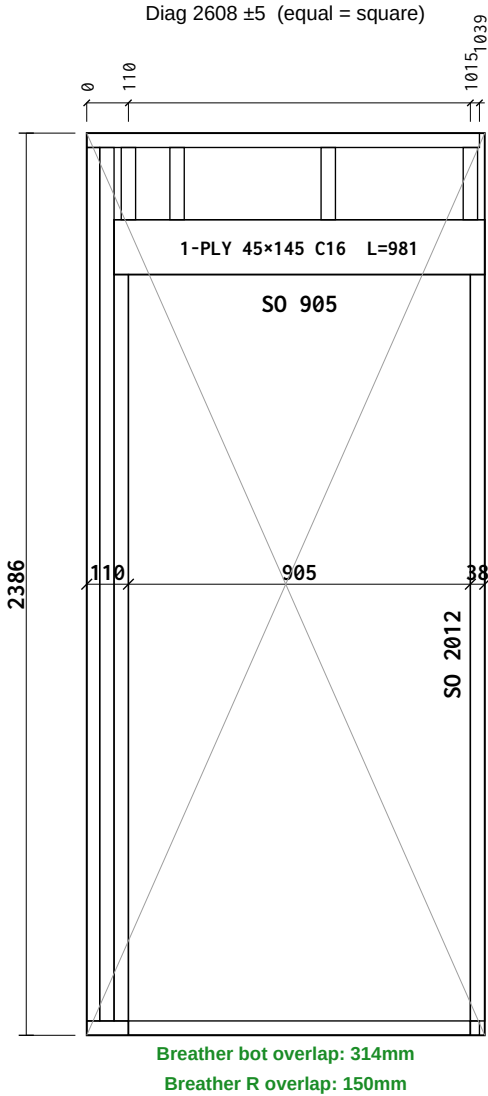

Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	905	0	0	1
BR2 Bottom Rail	38×89 C16	110	0	0	1
BR3 Bottom Rail	38×89 C16	24	0	0	1
TR1 Top Rail	38×89 C16	1039	0	0	1
ES1 End Stud	38×89 C16	191	0	0	1
ES2 End Stud	38×89 C16	191	0	0	1
KS1 Vertical Stud	38×89 C16	2310	0	0	1
CS1 Cripple Stud	38×89 C16	1974	0	0	2
LP1 Lintel Ply	981×45 C16	981	0	0	1
PK1 Lintel Packer	981×41 C16	981	0	0	1
OS1 OSB Support	38×89 C16	191	0	0	2
JS1 Junction Stud	38×34 C16	2310	0	0	1

Total: 14 pcs / 13.37 m

Sheathing & Insulation

Material	W	H	Label
----------	---	---	-------

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails

Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm


Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.




Breather Membrane:
Laps 100mm horizontal / 150mm vertical, upper lapping lower.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.

KEY PLAN



Revisions (Rev · Date · Note):				C01 - Construction issue			
Date: 2026-09-13		Scale: 1:20		Drawn: TS		Checked:	
Project Name:				MP Adams Plot 3, Eckington			
Site: Eckington		Client: MP Adams					
Title:							
Panel Fabrication — 38 x 140 C16 CLS							
Project Number: P3		Revision: C01					
Panel No: GF-IN2		Drawing No: P3-MF-GF-IN2					
Panel L×H×T: 1053×2386×89		Weight: 19 kg					
Status: CONSTRUCTION		Sheet: 1 / 1					

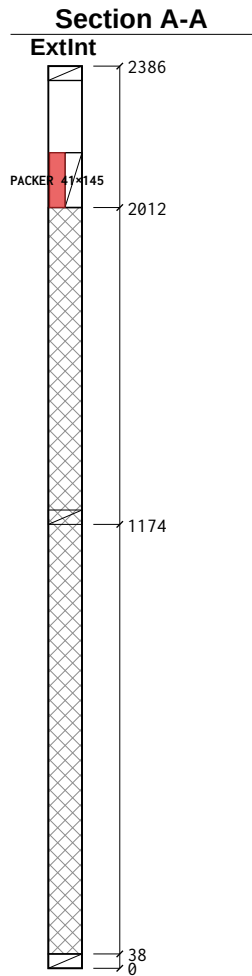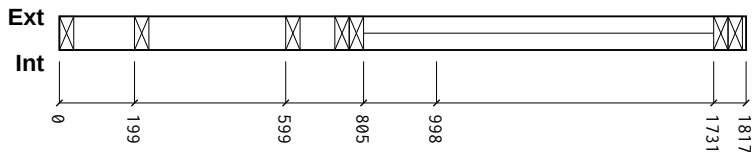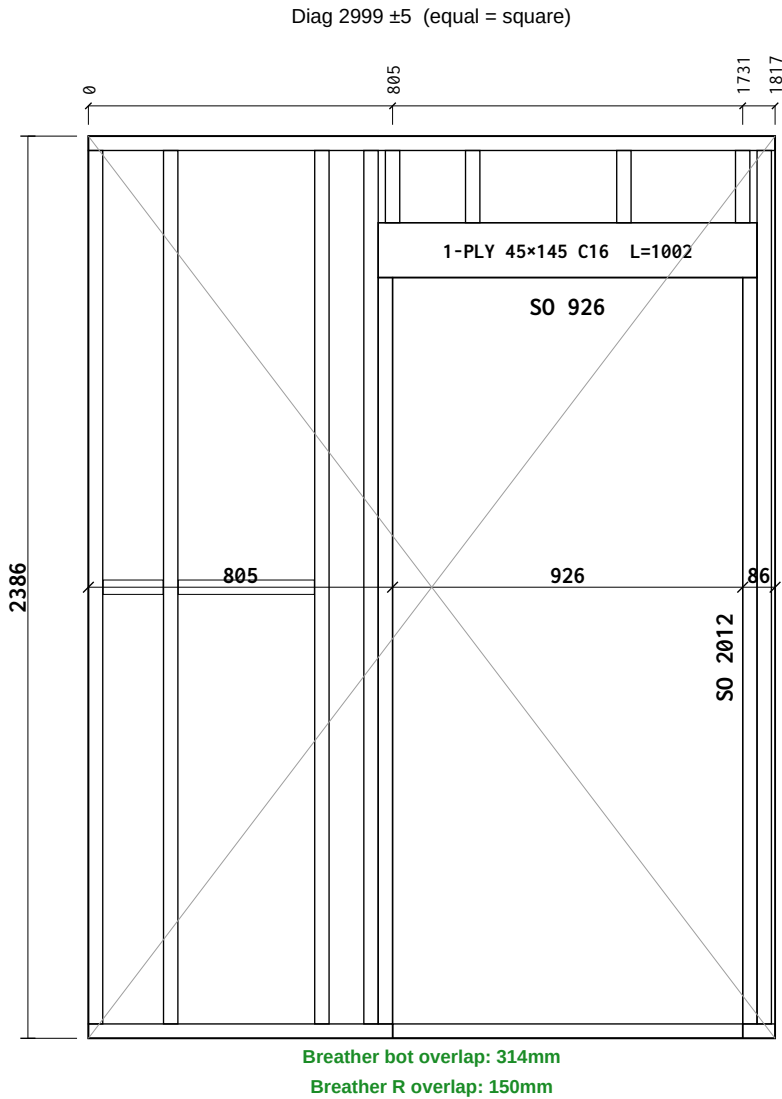

Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38x89 C16	926	0	0 1
BR2	Bottom Rail	38x89 C16	805	0	0 1
BR3	Bottom Rail	38x89 C16	86	0	0 1
TR1	Top Rail	38x89 C16	1817	0	0 1
ES1	End Stud	38x89 C16	2310	0	0 1
ES2	End Stud	38x89 C16	191	0	0 1
KS1	Vertical Stud	38x89 C16	2310	0	0 2
CS1	Cripple Stud	38x89 C16	1974	0	0 2
LP1	Lintel Ply	1002x45 C16	1002	0	0 1
PK1	Lintel Packer	1002x41 C16	1002	0	0 1
OS1	OSB Support	38x89 C16	191	0	0 2
VS1	Vertical Stud	38x89 C16	2310	0	0 2
VS2	Vertical Stud	38x89 C16	191	0	0 1
NG1	Noggin	38x89 C16	360	0	0 1
NG2	Noggin	38x89 C16	159	0	0 1

Total: 19 pcs / 22.42 m

Sheathing & Insulation

Material	W	HLabel
----------	---	--------

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1x90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1x90mm length field galvanised twisted strip nails

Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm


Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Breather Membrane:
Laps 100mm horizontal / 150mm vertical, upper lapping lower.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.




KEY PLAN



Revisions (Rev · Date · Note):

C01 - Construction issue

Date:	2026-09-13	Scale:	1:20	Drawn:	TS	Checked:	
Project Name:		MP Adams Plot 3, Eckington					
Site:	Eckington			Client:	MP Adams		
Title:		Panel Fabrication — 38 x 140 C16 CLS					
Project Number:	P3			Revision:	C01		
Panel No:	GF-IN3			Drawing No:	P3-MF-GF-IN3		
Panel LxHxT:	1817x2386x89			Weight:	34 kg		
Status:	CONSTRUCTION			Sheet:	1 / 1		

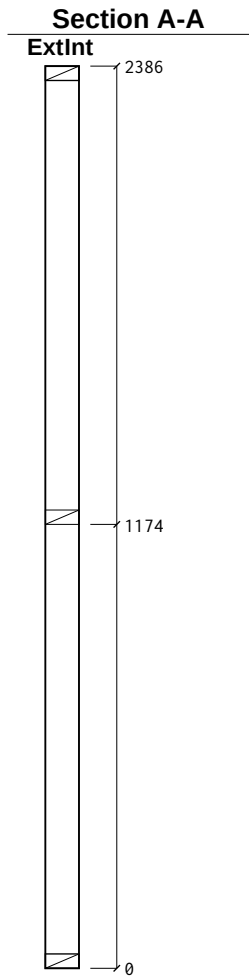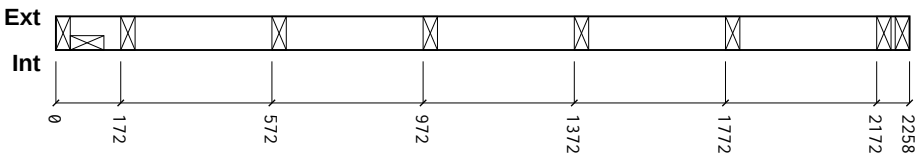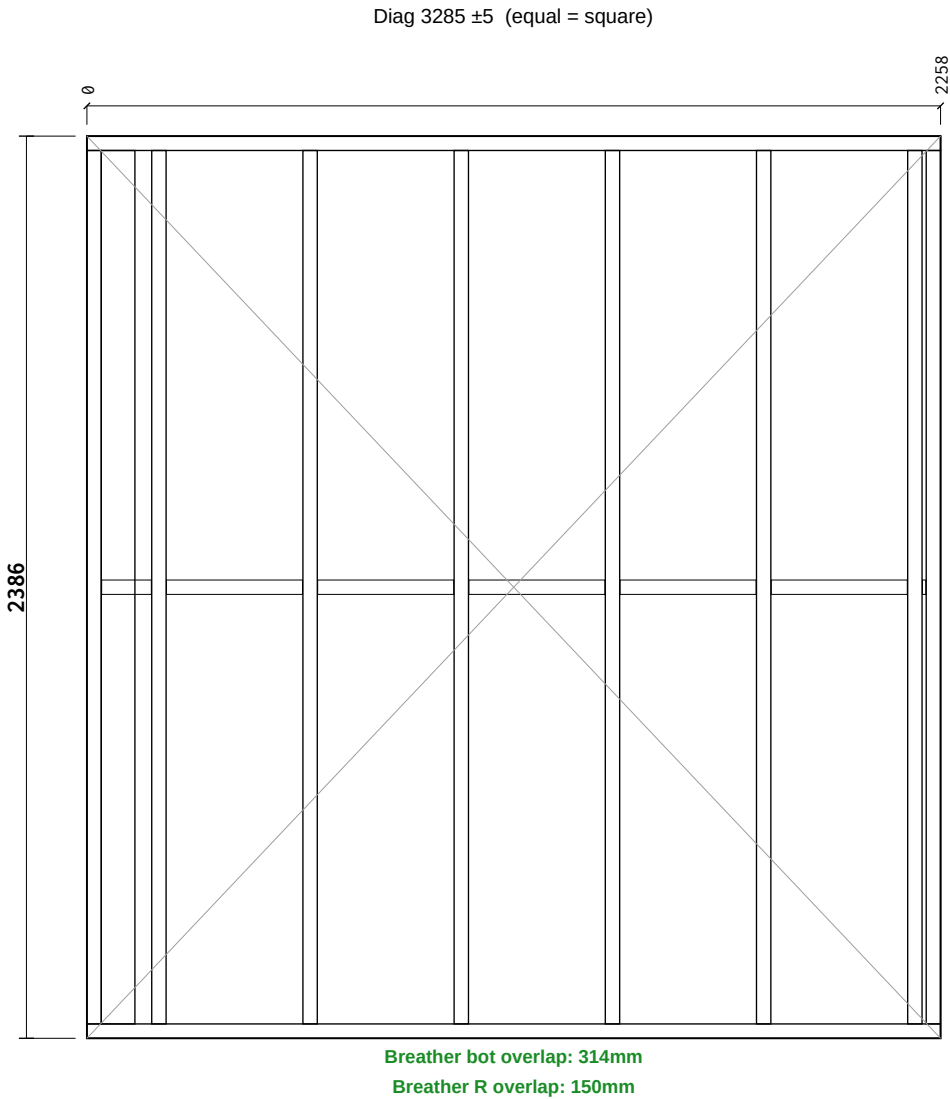

Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	2258	0	0	1
TR1 Top Rail	38×89 C16	2258	0	0	1
ES1 End Stud	38×89 C16	2310	0	0	1
ES2 End Stud	38×89 C16	2310	0	0	1
VS1 Vertical Stud	38×89 C16	2310	0	0	6
JS1 Junction Stud	38×89 C16	2310	0	0	1
NG1 Noggin	38×89 C16	360	0	0	5
NG2 Noggin	38×89 C16	132	0	0	1
NG3 Noggin	38×89 C16	9	0	0	1
Total: 18 pcs / 27.25 m					

Sheathing & Insulation

Material	W	HLabel
----------	---	--------

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails

Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm


Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Breather Membrane:
Laps 100mm horizontal / 150mm vertical, upper lapping lower.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.

KEY PLAN



Revisions (Rev · Date · Note):		C01 - Construction issue					
Date:	2026-09-13	Scale:	1:20	Drawn:	TS	Checked:	
Project Name:		MP Adams Plot 3, Eckington					
Site:	Eckington			Client:	MP Adams		
Title:	Panel Fabrication — 38 x 140 C16 CLS						
Project Number:	P3			Revision:	C01		
Panel No:	GF-IN4			Drawing No:	P3-MF-GF-IN4		
Panel L×H×T:	2258×2386×89			Weight:	39 kg		
Status:	CONSTRUCTION			Sheet:	1 / 1		