


Diag 3351 ±5 (equal = square)

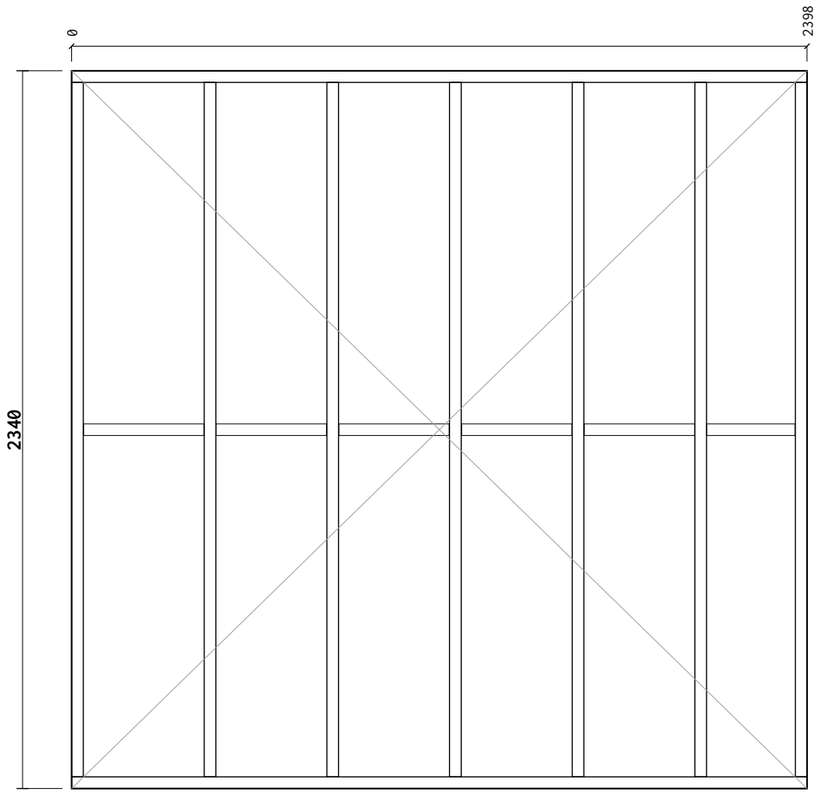



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	2398	0	0	1
TR1 Top Rail	38×89 C16	2398	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	5
NG1 Noggin	38×89 C16	392	0	0	1
NG2 Noggin	38×89 C16	360	0	0	4
NG3 Noggin	38×89 C16	288	0	0	1

Total: 15 pcs / 22.76 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN1		Drawing No: P4-MF-FF-IN1	
Panel L×H×T: 2398×2340×89		Weight: 32 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 2716 ±5 (equal = square)

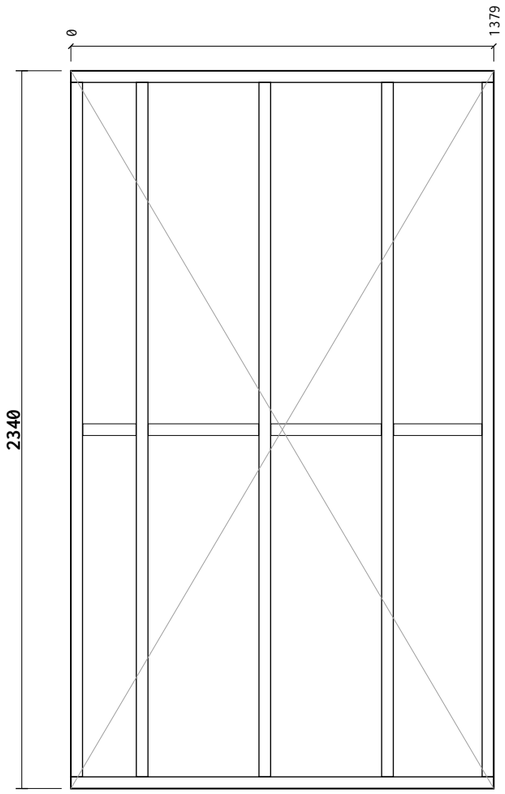



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1379	0	0	1
TR1 Top Rail	38×89 C16	1379	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	3
NG1 Noggin	38×89 C16	360	0	0	2
NG2 Noggin	38×89 C16	288	0	0	1
NG3 Noggin	38×89 C16	173	0	0	1

Total: 11 pcs / 15.26 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN



Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **FF-IN2**		Drawing No: **P4-MF-FF-IN2**	
Panel L×H×T: **1379×2340×89**		Weight: **22 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

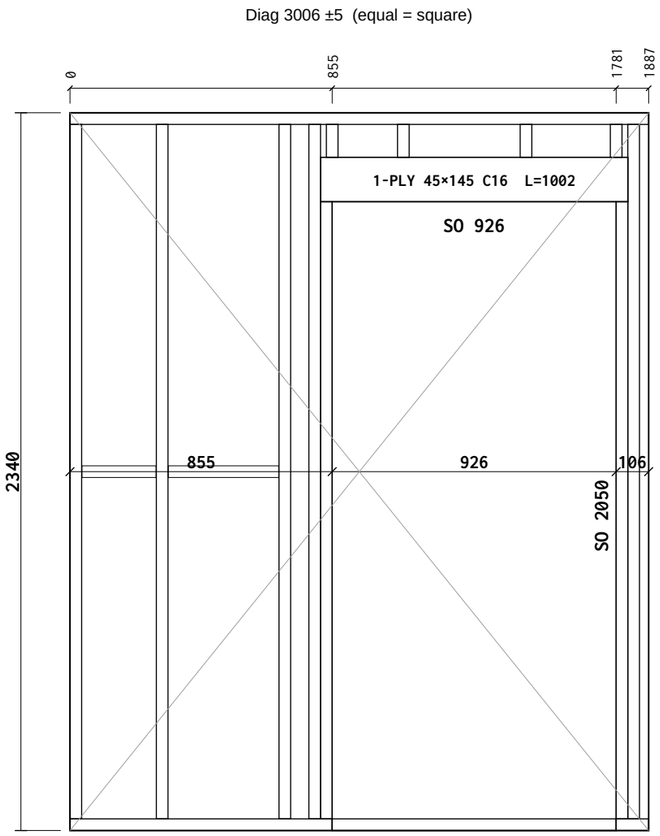



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	926	0	0	1
BR2	Bottom Rail	38×89 C16	855	0	0	1
BR3	Bottom Rail	38×89 C16	106	0	0	1
TR1	Top Rail	38×89 C16	1887	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	107	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	2
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	2264	0	0	2
VS2	Vertical Stud	38×89 C16	107	0	0	1
NG1	Noggin	38×89 C16	360	0	0	1
NG2	Noggin	38×89 C16	242	0	0	1

Total: 19 pcs / 22.15 m

Sheathing & Insulation

Material	W	HLabel

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN3		Drawing No: P4-MF-FF-IN3	
Panel L×H×T: 1887×2340×89		Weight: 34 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 3352 ±5 (equal = square)

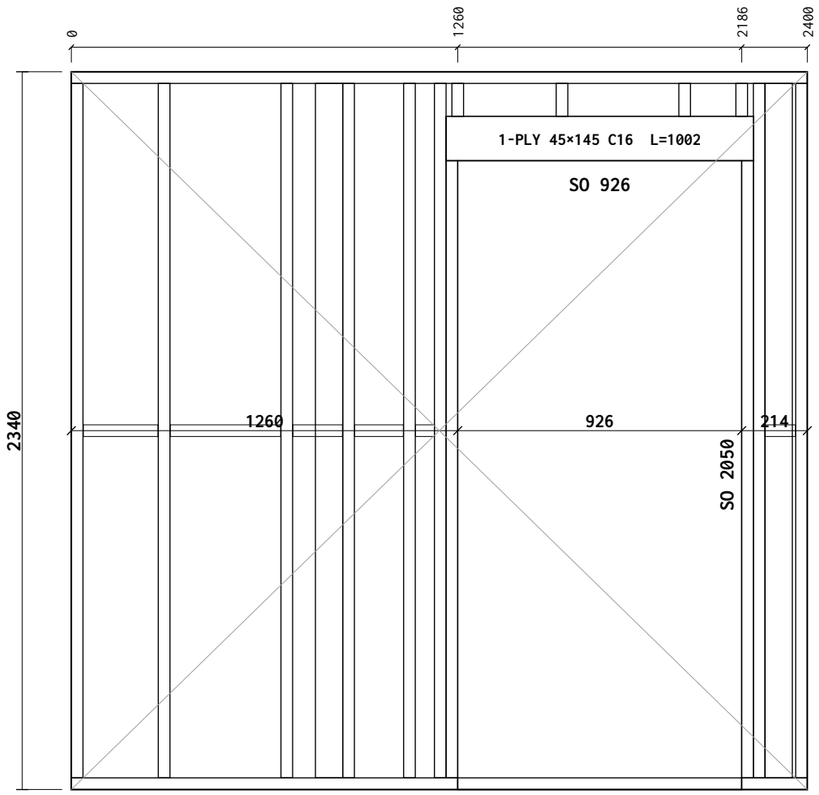



Section A-A



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1260	0	0	1
BR2	Bottom Rail	38×89 C16	926	0	0	1
BR3	Bottom Rail	38×89 C16	214	0	0	1
TR1	Top Rail	38×89 C16	2400	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	2
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	2264	0	0	4
VS2	Vertical Stud	38×89 C16	107	0	0	2
JS1	Junction Stud	38×89 C16	2264	0	0	2
NG1	Noggin	38×89 C16	360	0	0	1
NG2	Noggin	38×89 C16	244	0	0	1
NG3	Noggin	38×89 C16	161	0	0	1
NG4	Noggin	38×89 C16	159	0	0	1
NG5	Noggin	38×89 C16	99	0	0	1
NG6	Noggin	38×89 C16	61	0	0	1

Total: 28 pcs / 34.98 m

Sheathing & Insulation

Material	W	HLabel

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN





Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **FF-IN4**		Drawing No: **P4-MF-FF-IN4**	
Panel L×H×T: **2400×2340×89**		Weight: **52 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

Diag 3129 ±5 (equal = square)

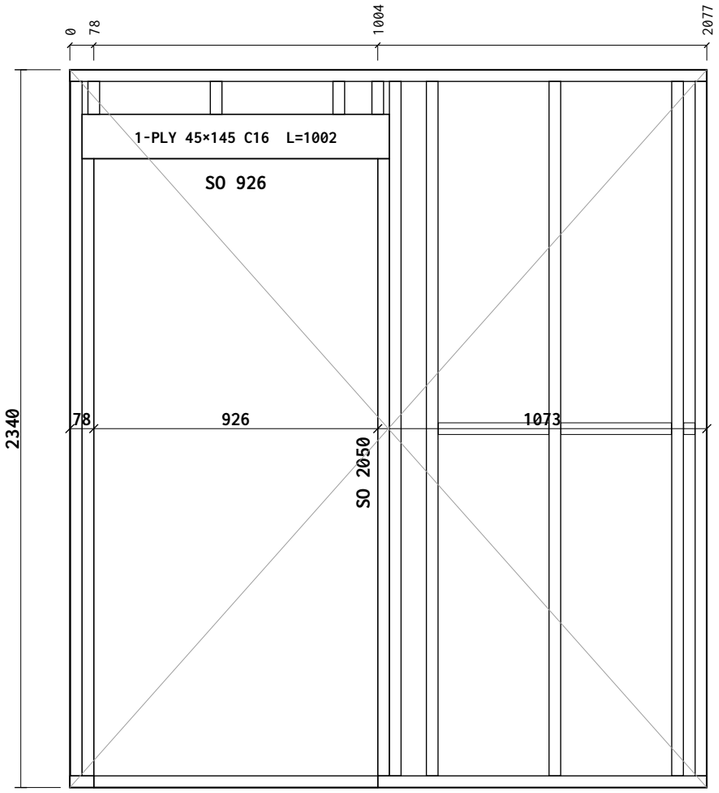





Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1073	0	0	1
BR2 Bottom Rail	38×89 C16	926	0	0	1
BR3 Bottom Rail	38×89 C16	78	0	0	1
TR1 Top Rail	38×89 C16	2077	0	0	1
ES1 End Stud	38×89 C16	107	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
KS1 Vertical Stud	38×89 C16	2264	0	0	2
CS1 Cripple Stud	38×89 C16	2012	0	0	2
LP1 Lintel Ply	1002×45 C16	1002	0	0	1
PK1 Lintel Packer	1002×41 C16	1002	0	0	1
OS1 OSB Support	38×89 C16	107	0	0	2
VS1 Vertical Stud	38×89 C16	2264	0	0	3
VS2 Vertical Stud	38×89 C16	107	0	0	1
NG1 Noggin	38×89 C16	360	0	0	2
NG2 Noggin	38×89 C16	36	0	0	1

Total: 21 pcs / 24.95 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **FF-IN5**		Drawing No: **P4-MF-FF-IN5**	
Panel L×H×T: **2077×2340×89**		Weight: **38 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

Diag 2655 ±5 (equal = square)

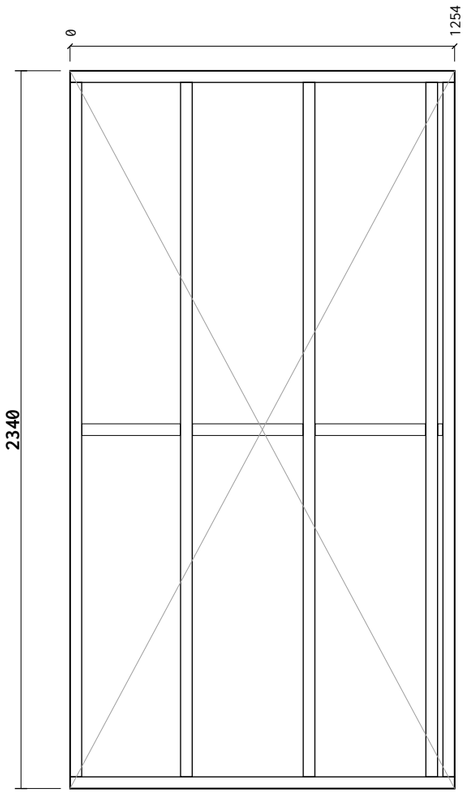



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1254	0	0	1
TR1 Top Rail	38×89 C16	1254	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	3
NG1 Noggin	38×89 C16	360	0	0	2
NG2 Noggin	38×89 C16	320	0	0	1
NG3 Noggin	38×89 C16	16	0	0	1

Total: 11 pcs / 14.88 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN6		Drawing No: P4-MF-FF-IN6	
Panel L×H×T: 1254×2340×89		Weight: 21 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

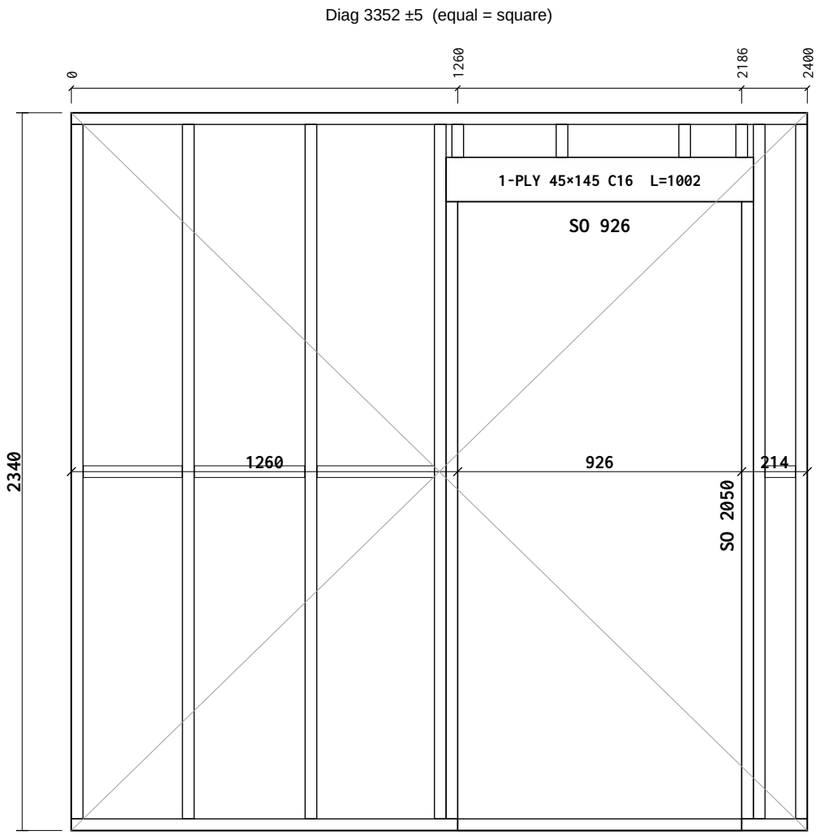



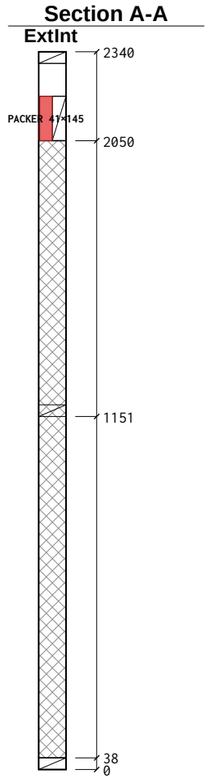

Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1260	0	0	1
BR2	Bottom Rail	38×89 C16	926	0	0	1
BR3	Bottom Rail	38×89 C16	214	0	0	1
TR1	Top Rail	38×89 C16	2400	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	2
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	2264	0	0	2
VS2	Vertical Stud	38×89 C16	107	0	0	2
NG1	Noggin	38×89 C16	383	0	0	1
NG2	Noggin	38×89 C16	360	0	0	1
NG3	Noggin	38×89 C16	322	0	0	1
NG4	Noggin	38×89 C16	99	0	0	1

Total: 22 pcs / 26.00 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN7		Drawing No: P4-MF-FF-IN7	
Panel L×H×T: 2400×2340×89		Weight: 39 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

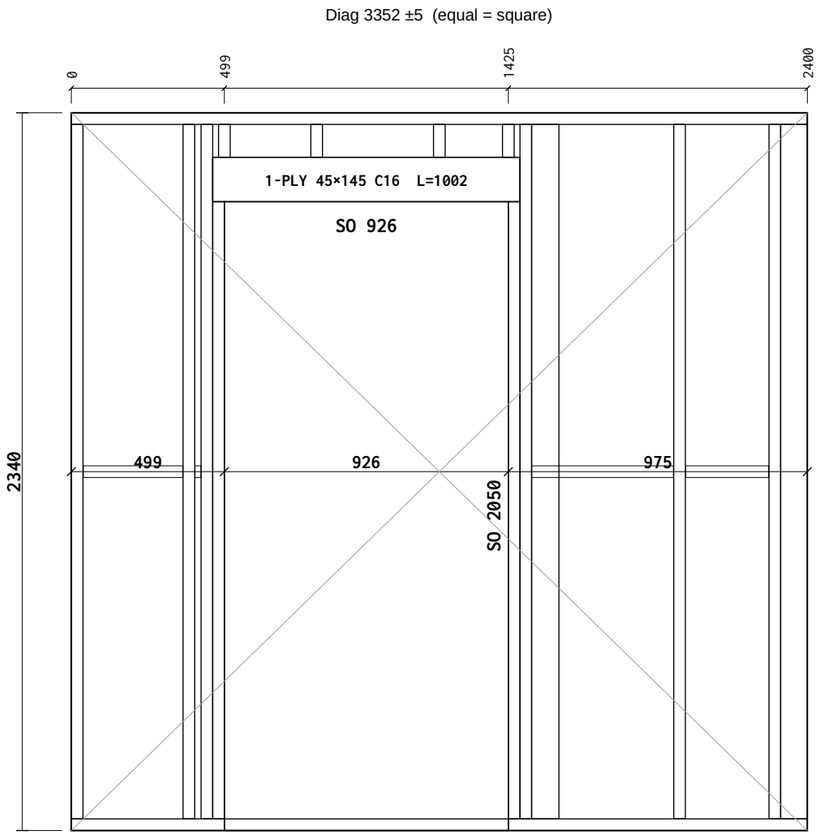





Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	975	0	0	1
BR2	Bottom Rail	38×89 C16	926	0	0	1
BR3	Bottom Rail	38×89 C16	499	0	0	1
TR1	Top Rail	38×89 C16	2400	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	2
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	2264	0	0	2
VS2	Vertical Stud	38×89 C16	107	0	0	2
JS1	Junction Stud	38×89 C16	2264	0	0	1
JS2	Junction Stud	38×87 C16	2264	0	0	1
NG1	Noggin	38×89 C16	462	0	0	1
NG2	Noggin	38×89 C16	324	0	0	1
NG3	Noggin	38×89 C16	271	0	0	1
NG4	Noggin	38×89 C16	20	0	0	1

Total: 24 pcs / 30.45 m

Sheathing & Insulation

Material	W	HLabel

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN8		Drawing No: P4-MF-FF-IN8	
Panel L×H×T: 2400×2340×89		Weight: 46 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 2611 ±5 (equal = square)

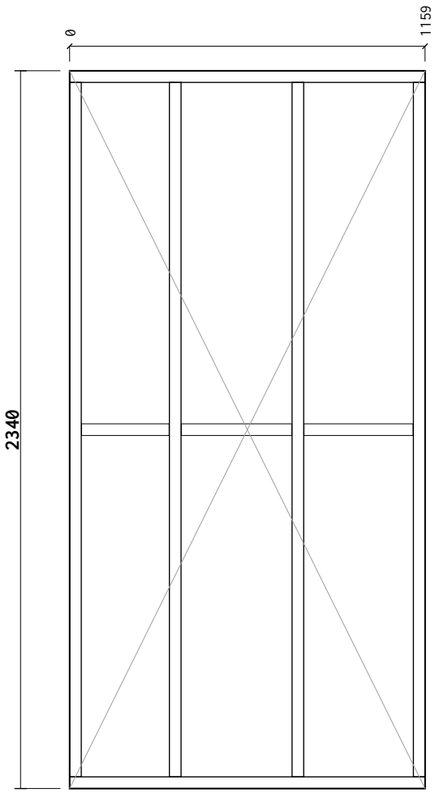

Section A-A





Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1159	0	0	1
TR1	Top Rail	38×89 C16	1159	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
VS1	Vertical Stud	38×89 C16	2264	0	0	2
NG1	Noggin	38×89 C16	360	0	0	1
NG2	Noggin	38×89 C16	356	0	0	1
NG3	Noggin	38×89 C16	285	0	0	1

Total: 9 pcs / 12.38 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **FF-IN9**		Drawing No: **P4-MF-FF-IN9**	
Panel L×H×T: **1159×2340×89**		Weight: **18 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

Diag 2691 ±5 (equal = square)

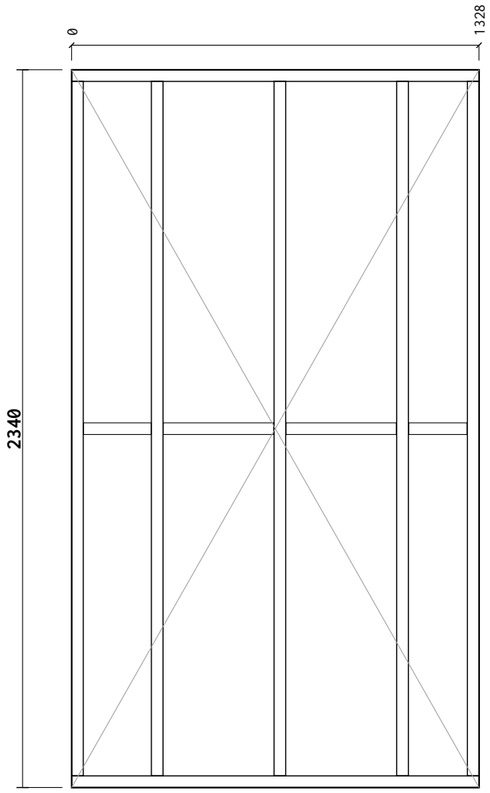



Section A-A



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1329	0	0	1
TR1	Top Rail	38×89 C16	1329	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
VS1	Vertical Stud	38×89 C16	2264	0	0	3
NG1	Noggin	38×89 C16	360	0	0	2
NG2	Noggin	38×89 C16	220	0	0	1
NG3	Noggin	38×89 C16	190	0	0	1

Total: 11 pcs / 15.11 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN10		Drawing No: P4-MF-FF-IN10	
Panel L×H×T: 1329×2340×89		Weight: 21 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 2691 ±5 (equal = square)

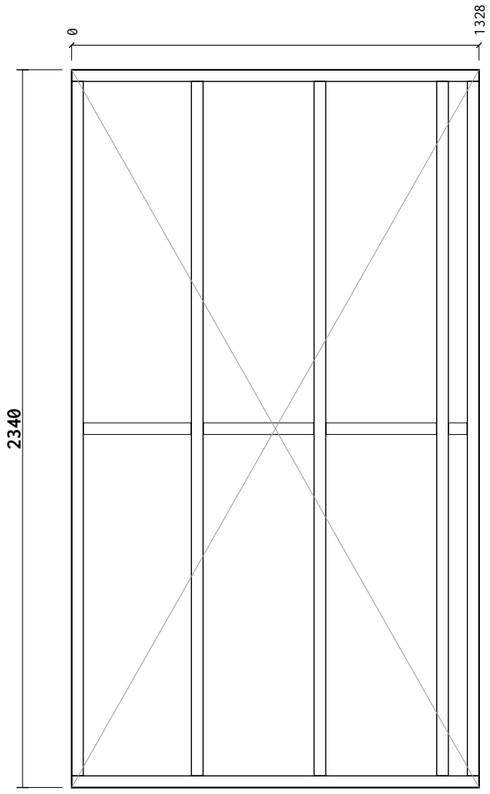



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1329	0	0	1
TR1 Top Rail	38×89 C16	1329	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	3
NG1 Noggin	38×89 C16	360	0	0	2
NG2 Noggin	38×89 C16	351	0	0	1
NG3 Noggin	38×89 C16	60	0	0	1

Total: 11 pcs / 15.11 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN11		Drawing No: P4-MF-FF-IN11	
Panel L×H×T: 1329×2340×89		Weight: 21 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 2356 ±5 (equal = square)

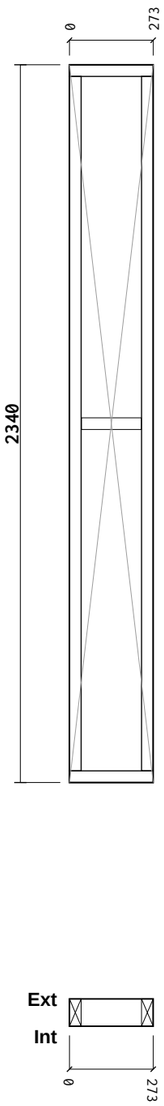

Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	273	0	0	1
TR1 Top Rail	38×89 C16	273	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
NG1 Noggin	38×89 C16	195	0	0	1

Total: 5 pcs / 5.27 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN12		Drawing No: P4-MF-FF-IN12	
Panel L×H×T: 273×2340×89		Weight: 7 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

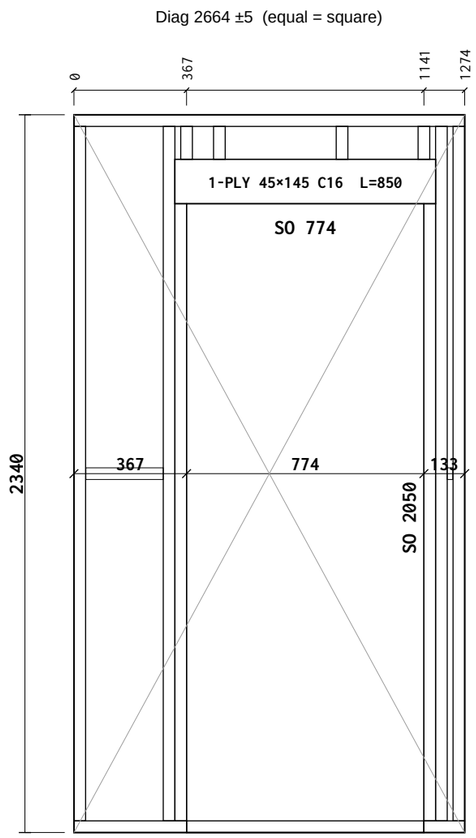





Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	774	0	0	1
BR2	Bottom Rail	38×89 C16	367	0	0	1
BR3	Bottom Rail	38×89 C16	133	0	0	1
TR1	Top Rail	38×89 C16	1274	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	2264	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	2
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	850×45 C16	850	0	0	1
PK1	Lintel Packer	850×41 C16	850	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	107	0	0	2
NG1	Noggin	38×89 C16	252	0	0	1
NG2	Noggin	38×89 C16	18	0	0	1

Total: 18 pcs / 18.03 m

Sheathing & Insulation

Material	W	HLabel

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN



Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **FF-IN13**		Drawing No: **P4-MF-FF-IN13**	
Panel L×H×T: **1274×2340×89**		Weight: **28 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

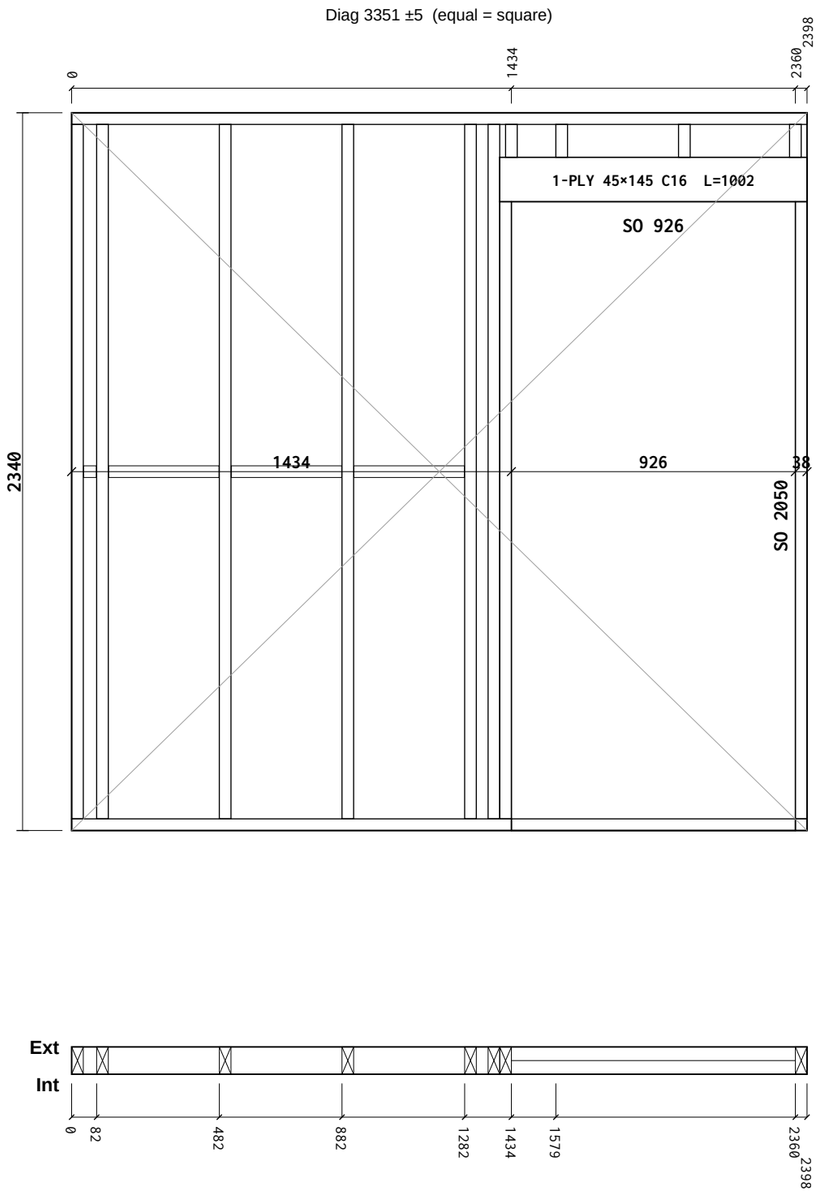

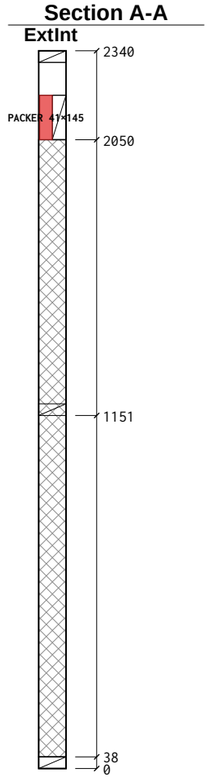

Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1434	0	0	1
BR2	Bottom Rail	38×89 C16	926	0	0	1
BR3	Bottom Rail	38×89 C16	38	0	0	1
TR1	Top Rail	38×89 C16	2398	0	0	1
ES1	End Stud	38×89 C16	2264	0	0	1
ES2	End Stud	38×89 C16	107	0	0	1
KS1	Vertical Stud	38×89 C16	2264	0	0	1
CS1	Cripple Stud	38×89 C16	2012	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	107	0	0	2
VS1	Vertical Stud	38×89 C16	2264	0	0	4
VS2	Vertical Stud	38×89 C16	107	0	0	1
NG1	Noggin	38×89 C16	360	0	0	3
NG2	Noggin	38×89 C16	42	0	0	1

Total: 22 pcs / 25.96 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails

Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note)
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN14		Drawing No: P4-MF-FF-IN14	
Panel L×H×T: 2398×2340×89		Weight: 39 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 3001 ±5 (equal = square)

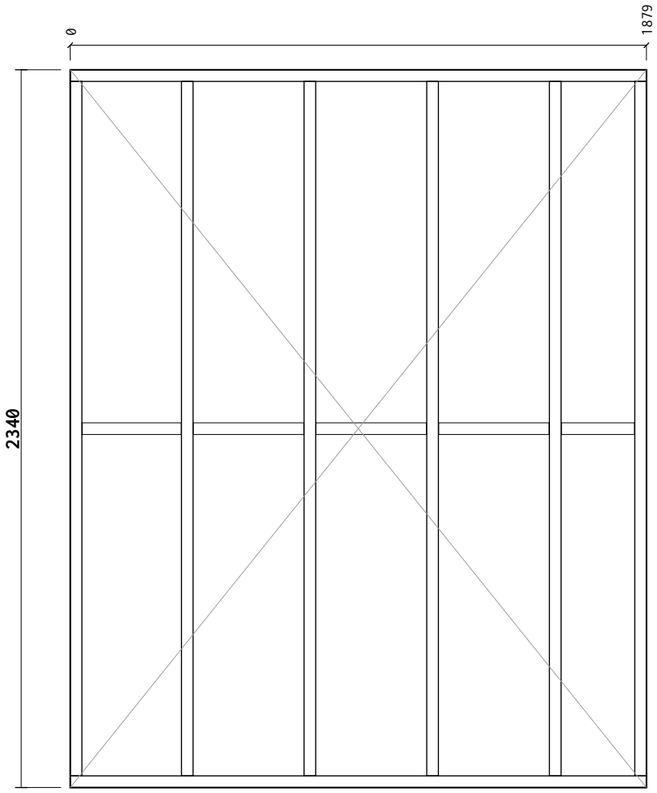



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1879	0	0	1
TR1 Top Rail	38×89 C16	1879	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	4
NG1 Noggin	38×89 C16	360	0	0	3
NG2 Noggin	38×89 C16	323	0	0	1
NG3 Noggin	38×89 C16	238	0	0	1

Total: 13 pcs / 18.98 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN15		Drawing No: P4-MF-FF-IN15	
Panel L×H×T: 1879×2340×89		Weight: 27 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 3074 ±5 (equal = square)

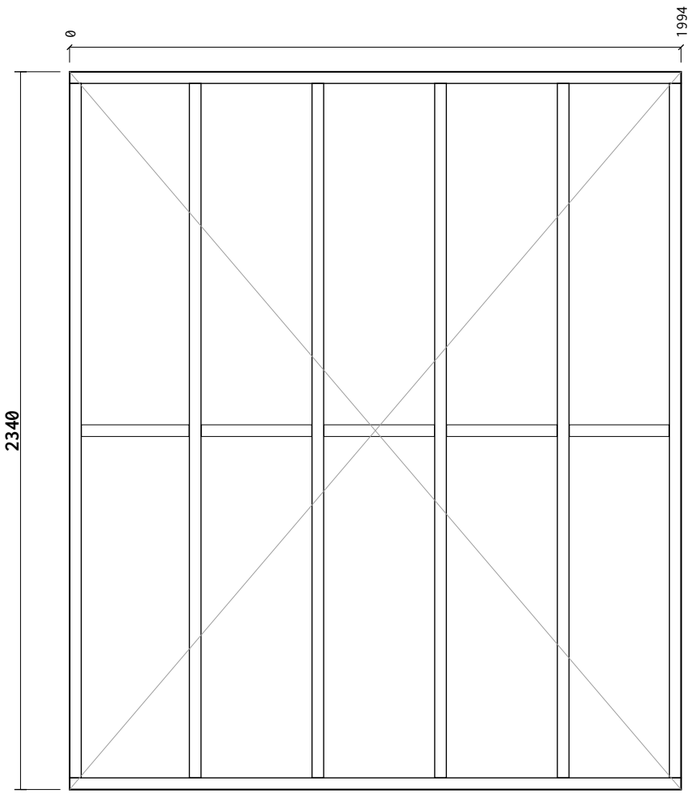



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	1994	0	0	1
TR1 Top Rail	38×89 C16	1994	0	0	1
ES1 End Stud	38×89 C16	2264	0	0	1
ES2 End Stud	38×89 C16	2264	0	0	1
VS1 Vertical Stud	38×89 C16	2264	0	0	4
NG1 Noggin	38×89 C16	360	0	0	3
NG2 Noggin	38×89 C16	351	0	0	1
NG3 Noggin	38×89 C16	325	0	0	1

Total: 13 pcs / 19.33 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.

KEY PLAN



Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: FF-IN16		Drawing No: P4-MF-FF-IN16	
Panel L×H×T: 1994×2340×89		Weight: 27 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	