


Diag 2840 ±5 (equal = square)

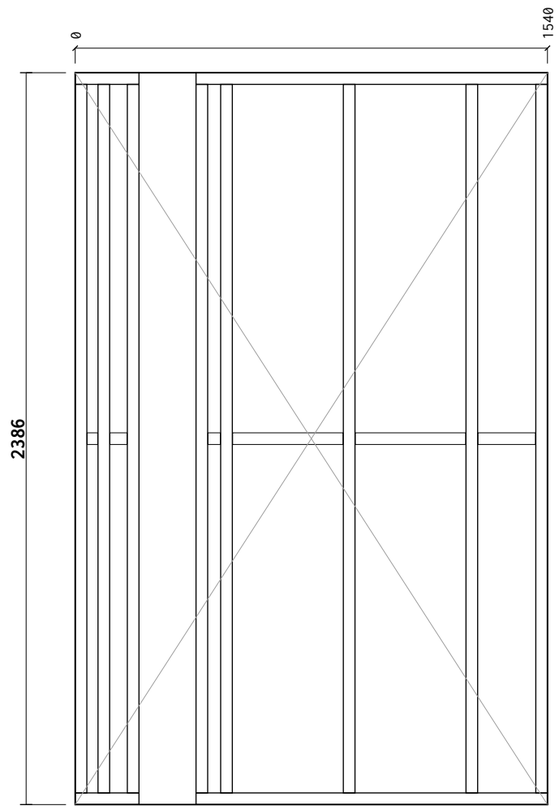



Section A-A

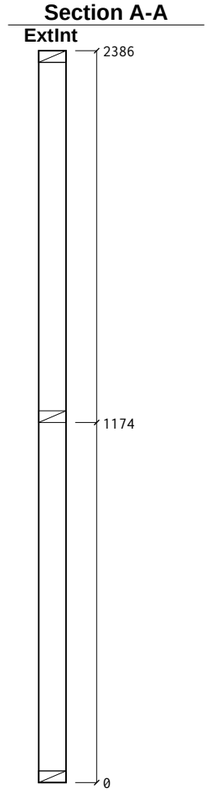

Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1146	0	0	1
BR2	Bottom Rail	38×89 C16	208	0	0	1
TR1	Top Rail	38×89 C16	1146	0	0	1
TR2	Top Rail	38×89 C16	208	0	0	1
ES1	End Stud	38×89 C16	2310	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
VS1	Vertical Stud	38×89 C16	2310	0	0	6
NG1	Noggin	38×89 C16	360	0	0	2
NG2	Noggin	38×89 C16	188	0	0	1
NG3	Noggin	38×89 C16	56	0	0	1
NG4	Noggin	38×89 C16	40	0	0	1
NG5	Noggin	38×89 C16	34	0	0	1

Total: 18 pcs / 22.23 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **GF-IN1**		Drawing No: **P4-MF-GF-IN1**	
Panel L×H×T: **1540×2386×89**		Weight: **32 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

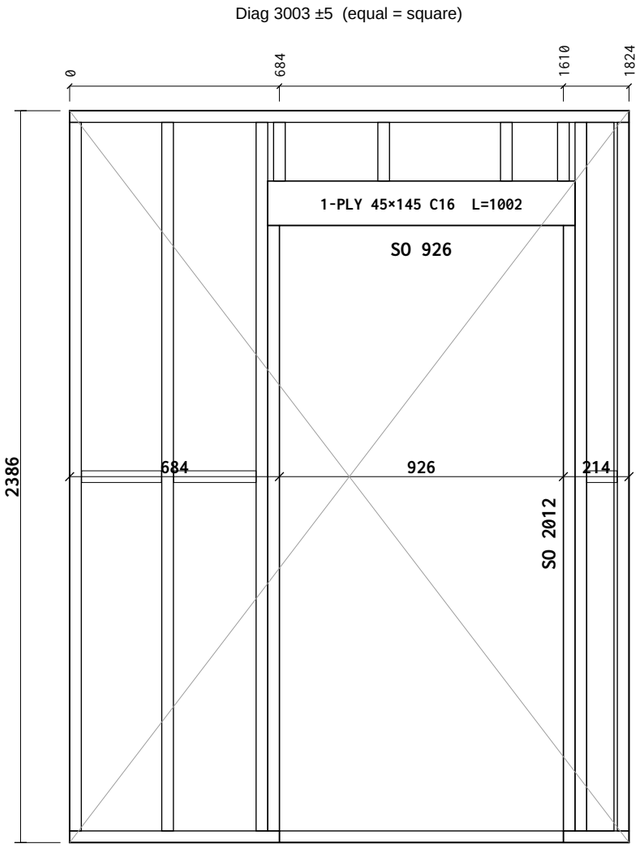

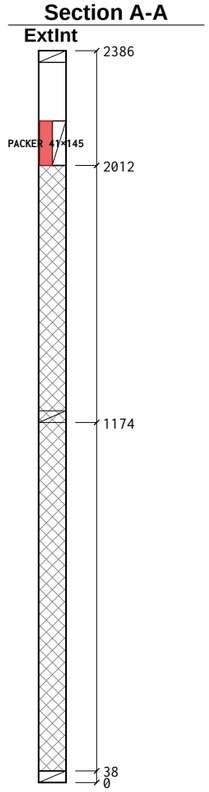



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	926	0	0	1
BR2	Bottom Rail	38×89 C16	684	0	0	1
BR3	Bottom Rail	38×89 C16	214	0	0	1
TR1	Top Rail	38×89 C16	1824	0	0	1
ES1	End Stud	38×89 C16	2310	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
KS1	Vertical Stud	38×89 C16	2310	0	0	2
CS1	Cripple Stud	38×89 C16	1974	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	191	0	0	2
VS1	Vertical Stud	38×89 C16	2310	0	0	1
VS2	Vertical Stud	38×89 C16	191	0	0	2
JS1	Junction Stud	38×89 C16	2310	0	0	1
NG1	Noggin	38×89 C16	269	0	0	1
NG2	Noggin	38×89 C16	260	0	0	1
NG3	Noggin	38×89 C16	99	0	0	1

Total: 21 pcs / 24.85 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **GF-IN2**		Drawing No: **P4-MF-GF-IN2**	
Panel L×H×T: **1824×2386×89**		Weight: **38 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

Diag 2862 ±5 (equal = square)

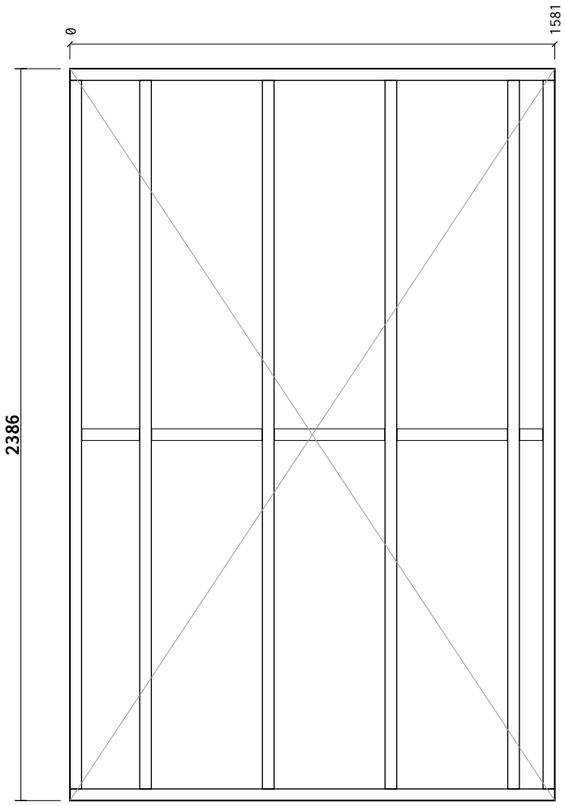



Section A-A



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	1581	0	0	1
TR1	Top Rail	38×89 C16	1581	0	0	1
ES1	End Stud	38×89 C16	2310	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
VS1	Vertical Stud	38×89 C16	2310	0	0	4
NG1	Noggin	38×89 C16	360	0	0	3
NG2	Noggin	38×89 C16	188	0	0	1
NG3	Noggin	38×89 C16	75	0	0	1

Total: 13 pcs / 18.36 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: GF-IN3		Drawing No: P4-MF-GF-IN3	
Panel L×H×T: 1581×2386×89		Weight: 26 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	

Diag 3216 ±5 (equal = square)

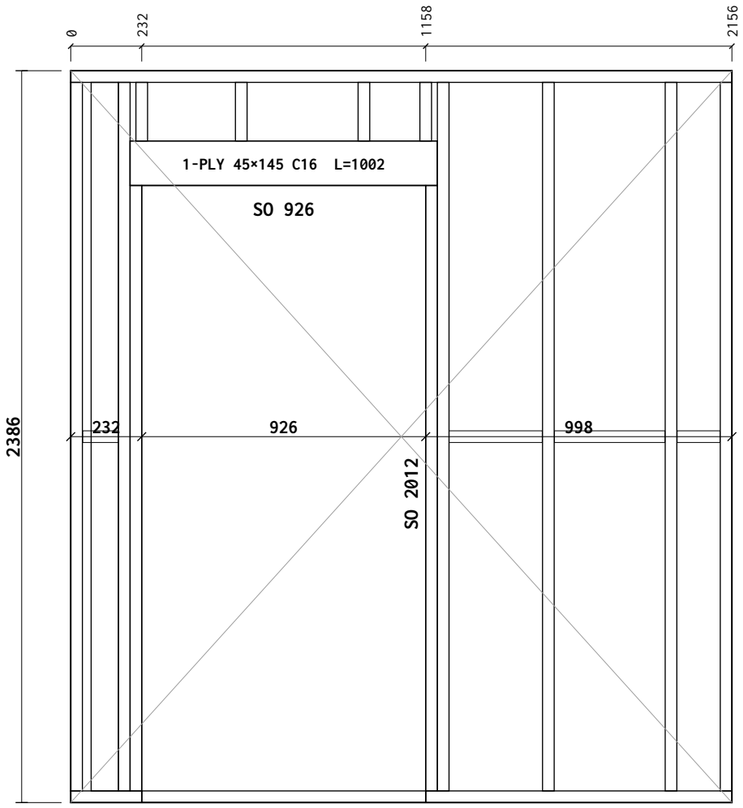



Section A-A



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	999	0	0	1
BR2	Bottom Rail	38×89 C16	926	0	0	1
BR3	Bottom Rail	38×89 C16	231	0	0	1
TR1	Top Rail	38×89 C16	2156	0	0	1
ES1	End Stud	38×89 C16	2310	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
KS1	Vertical Stud	38×89 C16	2310	0	0	2
CS1	Cripple Stud	38×89 C16	1974	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	191	0	0	2
VS1	Vertical Stud	38×89 C16	2310	0	0	2
VS2	Vertical Stud	38×89 C16	191	0	0	2
JS1	Junction Stud	38×89 C16	2310	0	0	1
NG1	Noggin	38×89 C16	360	0	0	1
NG2	Noggin	38×89 C16	304	0	0	1
NG3	Noggin	38×89 C16	140	0	0	1
NG4	Noggin	38×89 C16	116	0	0	1

Total: 23 pcs / 28.12 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **GF-IN4**		Drawing No: **P4-MF-GF-IN4**	
Panel L×H×T: **2156×2386×89**		Weight: **42 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

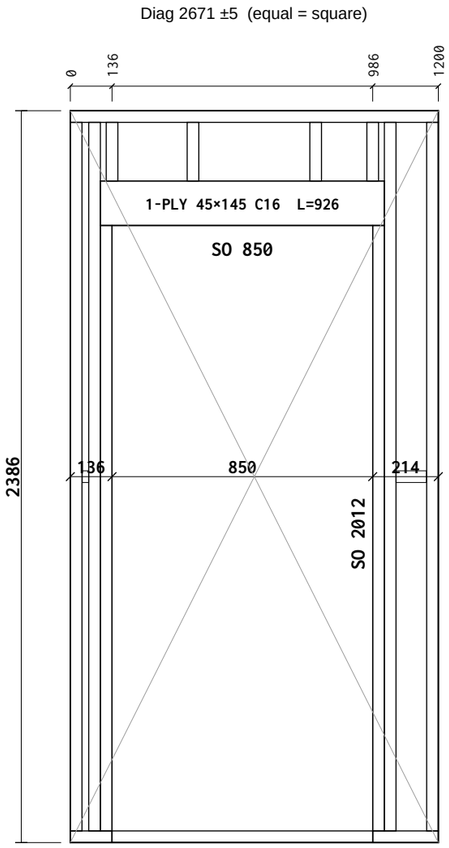

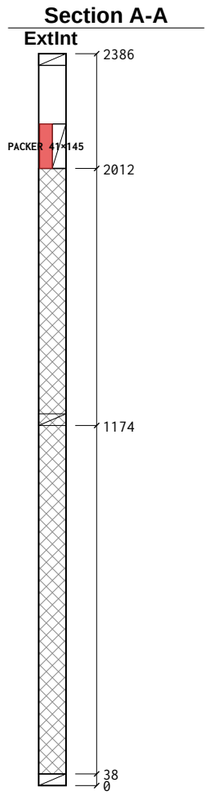



Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	850	0	0	1
BR2	Bottom Rail	38×89 C16	214	0	0	1
BR3	Bottom Rail	38×89 C16	136	0	0	1
TR1	Top Rail	38×89 C16	1200	0	0	1
ES1	End Stud	38×89 C16	2310	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
KS1	Vertical Stud	38×89 C16	2310	0	0	2
CS1	Cripple Stud	38×89 C16	1974	0	0	2
LP1	Lintel Ply	926×45 C16	926	0	0	1
PK1	Lintel Packer	926×41 C16	926	0	0	1
OS1	OSB Support	38×89 C16	191	0	0	2
VS1	Vertical Stud	38×89 C16	191	0	0	2
NG1	Noggin	38×89 C16	99	0	0	1
NG2	Noggin	38×89 C16	21	0	0	1

Total: 18 pcs / 18.32 m

Sheathing & Insulation

Material	W	HLabel

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction


Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **GF-IN5**		Drawing No: **P4-MF-GF-IN5**	
Panel L×H×T: **1200×2386×89**		Weight: **28 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

Diag 3216 ±5 (equal = square)

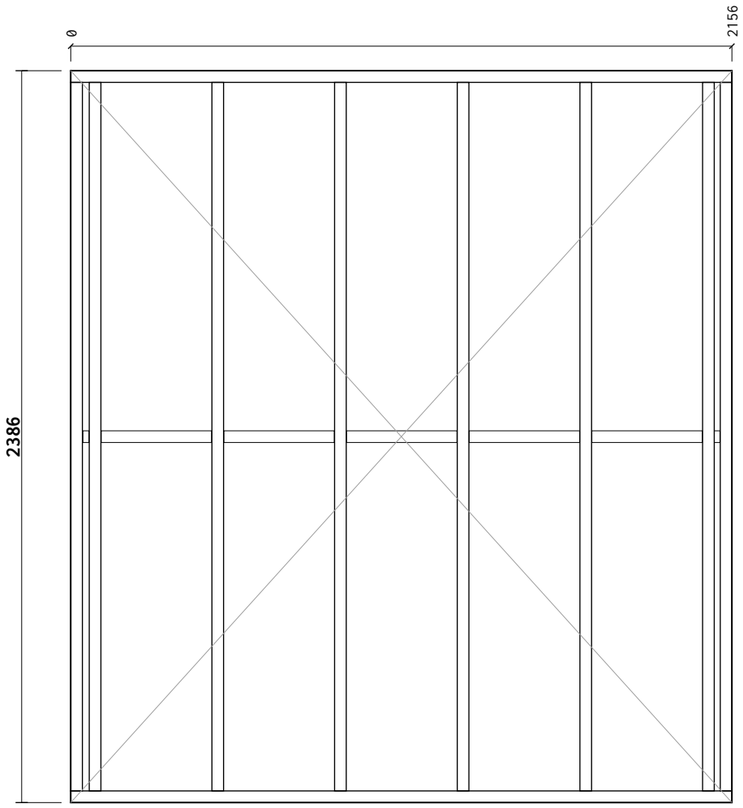



Section A-A



Cut List

Item	Section	Len	Bot°	Top°	Qty
BR1 Bottom Rail	38×89 C16	2156	0	0	1
TR1 Top Rail	38×89 C16	2156	0	0	1
ES1 End Stud	38×89 C16	2310	0	0	1
ES2 End Stud	38×89 C16	2310	0	0	1
VS1 Vertical Stud	38×89 C16	2310	0	0	6
NG1 Noggin	38×89 C16	360	0	0	5
NG2 Noggin	38×89 C16	20	0	0	1
NG3 Noggin	38×89 C16	18	0	0	1

Total: 17 pcs / 24.63 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.


Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.


KEY PLAN




Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: **2026-10-11**	Scale: **1:20**	Drawn: **TS**	Checked:
Project Name: **MP Adams Plot 4, Eckington**			
Site: **Eckington**		Client: **MP Adams**	
Title: **Panel Fabrication — 38 x 140 C16 CLS**			
Project Number: **P4**		Revision: **C04**	
Panel No: **GF-IN6**		Drawing No: **P4-MF-GF-IN6**	
Panel L×H×T: **2156×2386×89**		Weight: **35 kg**	
Status: **CONSTRUCTION**		Sheet: **1 / 1**	

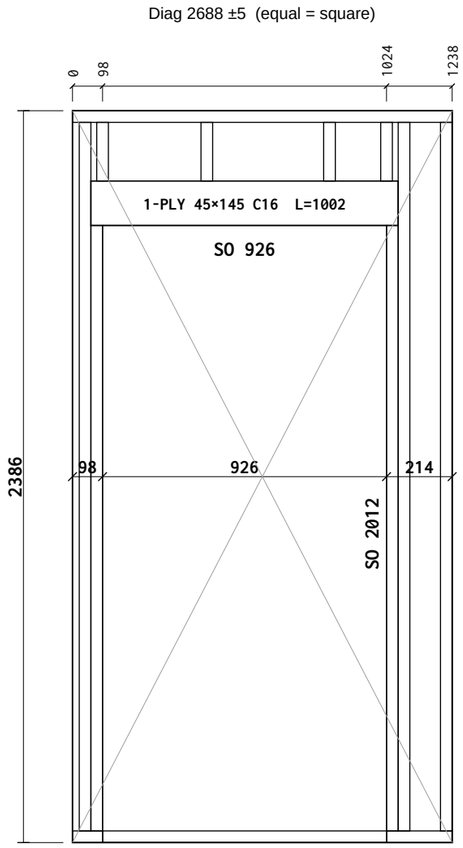



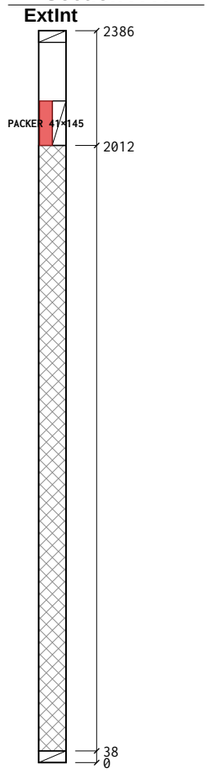

Cut List

Item		Section	Len	Bot°	Top°	Qty
BR1	Bottom Rail	38×89 C16	926	0	0	1
BR2	Bottom Rail	38×89 C16	214	0	0	1
BR3	Bottom Rail	38×89 C16	98	0	0	1
TR1	Top Rail	38×89 C16	1238	0	0	1
ES1	End Stud	38×89 C16	191	0	0	1
ES2	End Stud	38×89 C16	2310	0	0	1
KS1	Vertical Stud	38×89 C16	2310	0	0	2
CS1	Cripple Stud	38×89 C16	1974	0	0	2
LP1	Lintel Ply	1002×45 C16	1002	0	0	1
PK1	Lintel Packer	1002×41 C16	1002	0	0	1
OS1	OSB Support	38×89 C16	191	0	0	2
VS1	Vertical Stud	38×89 C16	191	0	0	1

Total: 15 pcs / 16.12 m

Sheathing & Insulation

Material	W	H	Label

General Notes:

Frame Nailing:
140mm Frames Nail Using 3no, 3.1×90mm length field galvanised twisted strip nails
90mm Frames Nail Using 2no, 3.1×90mm length field galvanised twisted strip nails


Sheathing Nails:
Components ≤ 100mm should be +/- 1mm
Components > 100mm should be +/- 1.5mm
Stepped check should be +/- 1.5mm
Sloped Opening sizes are +/-2mm

Nailing:
30x90mm Nails, 75mm Ctrs Perimeter / 150mm Ctrs Internal.

Manufacturing Tolerances:
Length ±3 · Height ±2 · Diagonals ±5 · Openings 0/+5 (mm).
Do not scale — work to figured dimensions. All dims in mm.

Panel Changes:
When the panel design is changed, a clean-up of the workbench, jig, and offcut tray is required before the next panel is laid out. Verify cut-list against this drawing's revision before continuing.

KEY PLAN



Revisions (Rev · Date · Note):
C04 - Steel approved by the engineer: steel + steel timber drawings issued for construction

Date: 2026-10-11	Scale: 1:20	Drawn: TS	Checked:
Project Name: MP Adams Plot 4, Eckington			
Site: Eckington		Client: MP Adams	
Title: Panel Fabrication — 38 x 140 C16 CLS			
Project Number: P4		Revision: C04	
Panel No: GF-IN7		Drawing No: P4-MF-GF-IN7	
Panel L×H×T: 1238×2386×89		Weight: 25 kg	
Status: CONSTRUCTION		Sheet: 1 / 1	