DELTA Version 4
User's Guide

Contributors

P. Thunis, A. Pederzoli, E. Georgieva,
C. Cuvelier, D. Pernigotti, B. Degraeuwe

Joint Research Centre, Ispra

Last update: July 2014

Table of Contents

Concepts ____ *3*

1. Introduction ____ **4**

2. Basic principles ____ **4**

3. Overview ____ **5**

3.1. Exploration ____ 6

3.2. Benchmarking ____ 7

4. Model quality Objective and Performance criteria ____ **7**

4.1. Model quality Objective (MQO) ____ 7

4.2. Performance criteria for Bias, R and SD ____ 8

4.3. Performance criteria for high percentile values ____ 10

4.4. An expression for the measurement uncertainty ____ 10

4.5. The 90% principle ____ 15

5. Benchmarking report ____ **15**

5.1. Hourly frequency ____ 16

5.2. Yearly frequency ____ 18

6. References ____ **21**

User's Guide ____ *22*

1. Installation and running steps ____ **23**

2. Preparation of input files ____ **24**

2.1. Init.ini ____ 24

2.2. Startup.ini ____ 24

2.3. Observation file ____ 27

2.3.1. Hourly Frequency ____ 27

2.3.2. Yearly Frequency ____ 28

2.4. Model file ____ 29

2.4.1. Hourly Frequency ____ 29

2.4.2. Yearly Frequency ____ 32

2.5. Using DELTA with yearly output ____ 33

3. Exploration mode ____ **33**

3.1. The data selection interface ____ 35

3.2. The analysis interface ____ 37

3.3. The main graphical interface ____ 39

3.4. Top menu selections ____ **Error! Bookmark not defined.**

4. DELTA functionalities and user's tuning options ____ **41**

4.1. "Playing" with uncertainty parameters: the "goals_criteria_oc" input file ____ 41

4.2. Saving summary statistics information in ASCII ____ 41

4.3. Mouse-driven recognize functionality ____ 42

4.4. Managing multiple datasets: the "MyDeltaInput" option ____ 42

5. Benchmarking mode ____ **42**

6. Distributed Dataset: Po-Valley **43**

7. Utility programs **43**

7.1. Data-Check Integrity Tool 43
7.2. CSV to NetCDF 44
7.3. Preproc-CDF 44

DIAGRAMS Overview ***46***

TEMPLATE: Diagram name (Elaboration name) 47
BARPLOT (Mean, Stddev, Exc. Days) 48
BARPLOT (Spatial Correlation) 49
BARPLOT (R, Mbias, RMSE, IOA, RDE, NMB, RPE, FAC2, NMSD) 50
BARPLOT (CUMUL) 51
SCATTER (Mean mod vs. mean obs) 52
SCATTER (One station – All time values) 53
TIME SERIES 54
TARGET (8H Max, Daily, Hourly) 55
SUMMARY REPORT (8H Max, Daily, Hourly) 56
MPC correlation (8H Max, Daily, Hourly) 57
MPC std. Dev. (8H Max, Daily, Hourly) 58
Taylor 59
Q-Q plot (One station All values) 60
Dynamic evaluation (Day-Night) 61
Dynamic evaluation (Summer-Winter) 62
Dynamic evaluation (Weekdays – Weekends) 63
GeoMap (Target) 64
Google Earth (Mean, Exc. Days, Bias, NMB, Std. Dev, R, RMSE, RDE, σM/σO, NMSD) 65

Annexes ***66***

1. A simplified formulation for the uncertainty 67
2. What's new 67

Part I

Concepts

1. Introduction

This document describes version 4 of the DELTA tool. This tool is an IDL-based evaluation software which includes the main assets of the EuroDelta, CityDelta, and POMI tools (Cuvelier et al. 2007; Thunis et al. 2007). It allows the user to perform rapid diagnostics of air quality and meteorological model performances. Although DELTA focuses on the air pollutants mentioned in the Air Quality Directive 2008 (AQD) it can be used for other variables as well. It works on the comparison of time series at specific locations and therefore addresses all relevant spatial scales (from local to regional). Some material about DELTA has been already presented in different documents:

METHOD2012: *Performance criteria to evaluate air quality modeling applications, P. Thunis, A. Pederzoli, D. Pernigotti. Atmospheric Environment, Volume 59, November 2012, Pages 476-482*

UNCERT2012: Set of 3 peer-reviewed publications and a working note:

- *Performance criteria to evaluate air quality modeling applications, P. Thunis, A. Pederzoli, D. Pernigotti. Atmospheric Environment, Volume 59, November 2012, Pages 476-482*
- *Model quality objectives based on measurement uncertainty: Part 1: Ozone, P. Thunis, D. Pernigotti and M. Gerboles, 2012, Atmospheric Environment, Volume 79, November 2013, Pages 861-868*
- *Model quality objectives based on measurement uncertainty: Part II:PM10 and NO2. D. Pernigotti, P. Thunis, M. Gerboles and C. Belis, Atmospheric Environment, Volume 79, November 2013, Pages 869-878*
- *Modeling quality objectives in the framework of the FAIRMODE project: working document. D. Pernigotti, M. Gerboles and P. Thunis, April 2014. Available on the fairmode webpage: http://fairmode.jrc.ec.europa.eu/wg1.html.*

PROCBENCH*: A procedure for air quality models benchmarking. 2011.*
P. Thunis, E. Georgieva, S. Galmarini (document available on DELTA web site)

We will here recall the main concepts and details of the DELTA Tool, as well as the improvements made in version 4 with respect to previous versions.

2. Basic principles

- DELTA works with <u>modelled-observed data pairs at surface level</u>, i.e. temporal series of modelled and monitored data at selected ground level locations (e.g. monitoring stations). In theory the software works therefore independently of model gridding and spatial scale. Of course the user must use an appropriate methodology to ensure comparability between grid-cell averaged model results and punctual measurements.
- A **minimum data availability** is required for statistics to be produced at a given station. Presently the requested percentage of available data over the selected period is **75%** as defined in the AQD 2008. For other variables than discussed in the AQD the same

percentage threshold applies. Statistics for a single station are only produced in DELTA when data availability of paired modelled and observed data is at least of 75% for the time period considered. When time averaging operations are performed the same availability criteria of 75% applies. For example daily averages will be performed only if data for 18 hours are available. Similarly O3 daily maximum 8-hour means will be performed only when 6 hourly values are available.

- Although DELTA focuses mostly on the evaluation of single model results, it allows analysing multiple model results. This is intended to help in the comparison of the results from different model versions.
- The current statistical diagrams and indicators proposed in DELTA have been selected based on literature review (see PROCBENCH). Usage of composite diagrams (e.g. Taylor, Target,…) has been favoured.
- Model results are assessed (when possible) with respect to "performance criteria" which indicate the level of accuracy considered to be acceptable for regulatory applications (see METHOD2012 and UNCERT2012 for more details). In this new version of the DELTA tool uncertainty-based performance criteria have been inserted for O3, NO2, PM10, PM2.5, WS and TEMP. For the latter two the criteria are proposed currently for testing purposes only.
- Both meteorological (scalars only) and air quality data can be handled by DELTA.
- Benchmarking is included in the DELTA software to allow the production of model performance summary reports by the users (see Section 5). For this benchmarking DELTA focuses on the evaluation of modelling applications related to the AQD. Pollutants and temporal scales are therefore those relevant to the AQD, i.e. O3, PM10, PM2.5 and NO2 data covering an entire calendar year.

3. Overview

The structure of the software is schematically presented in Figure 1. There are four main modules:

- *Input module* – refers to air quality and meteorological data, both from modelling and monitoring, prepared in a specific format. Instructions on how to prepare these input files are given in the User's Guide;
- *Configuration module* - includes configuration files, which link the input to the desired statistical elaboration. One of these files is the *startup.ini* file (to be prepared by the user) which contains details on the monitoring stations and measured variables (see User's Guide). Other important configuration files, embedded in the tool are the *performance_and_goal_criteria* file which lists the performance criteria used in DELTA for the different species and the *myDeltaInput* file which facilitates the management of multiple datasets;
- *Analysis module* – is the core of the DELTA where different statistical indicators and diagrams are produced. This module can be operated in two modes – exploration and benchmarking
- *Output module* – includes the results of the selected statistical elaborations (graphics or statistics values). For the benchmarking mode this output follows a predefined template, not modifiable by the user (see Section 5).

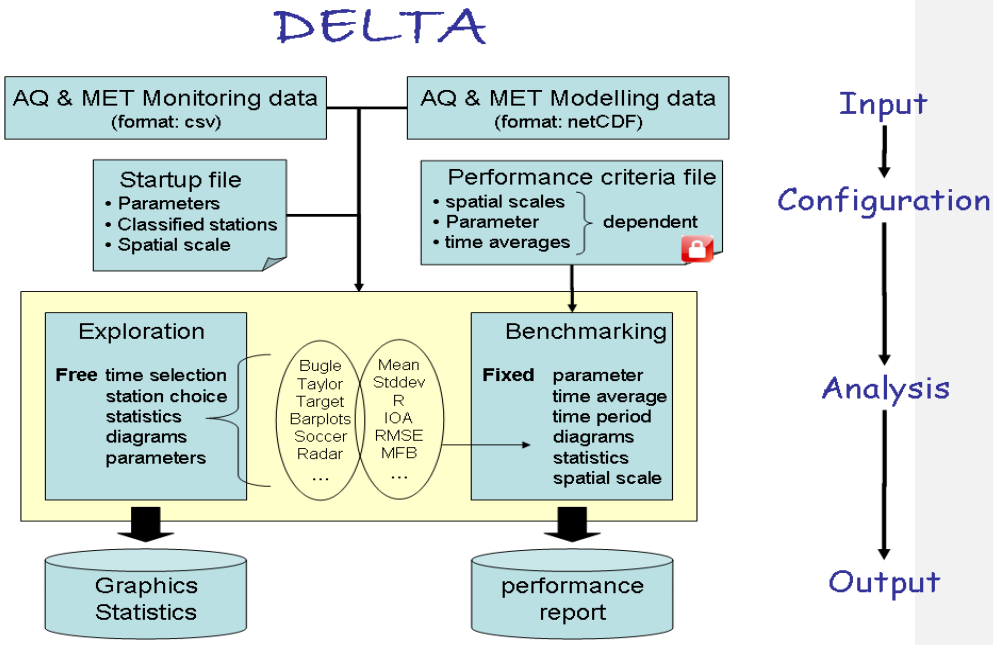

Figure 1. Structure of the DELTA software

Within the analysis two main modes exist: exploration and benchmarking mode. They are described in the next sections.

3.1. Exploration

This mode allows the user to analyse different statistical metrics and diagrams, using various time intervals, various stations, various parameters (meteorological variables or pollutants) from one model or more. Different types of analysis can be performed:

- Temporal analysis can be performed with different options (running averages, daily min/max/mean, selection of seasons, week days/ week-end, and daylight/ night time hours.
- Spatial analysis can be performed in two ways: based on the classification of the monitoring stations in different geographical entities or by using the Google Earth (or GeoMap) option, a functionality which permits to visualise a statistical parameter at each station as a point on a 2D map
- Multidimensional analysis can be performed. Dimensions here refer to monitoring parameters, models, scenarios and stations. One or more elements for each of those dimensions can be chosen and overlaid on a single diagram.

3.2. Benchmarking

This mode allows to produce summary reports containing performance criteria for different statistical indicators related to a given model application in the frame of the AQD. The reports are obtained through an automatic procedure and follow a pre-defined template structured around core indicators and diagrams (see Section 5). Some bounds for specific statistical indicators (performance criteria) are included, aiming to help in the assessment of the model performance.

Contrary to the exploration mode described above, freedom left to the user in benchmarking mode is minimal, i.e. DELTA automatically produces the performance report.

The template for reporting model performances is application specific (assessment or planning). In the current prototype version only assessment templates are considered and have been prepared for O3, NO2 and PM10. In terms of diagrams and indicators, the template is independent of spatial scale and pollutant but performance criteria (see next Section) can be pollutant and/or scale specific. Note that specific templates are proposed for models delivering annual averages only.

4. Model quality Objective and Performance criteria

The main statistical indicators referred to in the follow-up analysis are:

Mean Bias	$NMB = \overline{M} - \overline{O}$
Root Mean Square Error	$RMSE = \sqrt{\frac{1}{N}\sum_{i=1}^{N}(M_i - O_i)^2}$
Correlation Coefficient	$R = \sum_{i=1}^{N}(M_i - \overline{M}).(O_i - \overline{O}) \Big/ \sqrt{\sum_{i=1}^{N}(M_i - \overline{M})^2} \cdot \sqrt{\sum_{i=1}^{N}(O_i - \overline{O})^2}$
Centred Root Mean Square error	$CRMSE = \sqrt{\frac{1}{N}\sum_{i=1}^{N}\left[(M_i - \overline{M}) - (O_i - \overline{O})\right]^2}$
Normalised mean standard deviation	$NMSD = (\sigma_M - \sigma_O)/\sigma_O$

Table 1: List of the main statistical indices related to the MQO

4.1. Model quality Objective (MQO)

As described in METHOD2012 and UNCERT2012 the Model Quality Objective (MQO) used to test model results for a given application is defined as:

$$MQO = \frac{RMSE}{2RMS_U} = \frac{1}{2}\frac{\sqrt{\sum(O_i - M_i)^2}}{\sqrt{\sum U_i^2}} \leq 1 \qquad \textbf{(1)}$$

where RMS_U is the quadratic mean of the expanded measurement uncertainty U. With this formulation for the MQO the error between observed and modelled values (numerator) is compared to the absolute measured uncertainty (denominator). Three cases can occur:

1) MQO≤0.5. In this case the RMSE between observed and modeled values is less than the observation uncertainty. Model results are in average within the range of the observation uncertainty for that station and it is meaningless to further improve model performances.

2) 0.5<MQO≤1. In this case the RMSE between observed and modeled values is in average larger than the range of observation uncertainty but the model might still be a better predictor of the "true value" than observations.

3) MQO>1. In this case differences between observations and model results become significant.

This approach is flexible as it allows introducing more detailed information on observation uncertainty as they become available. Such an analysis is proposed in UNCERT2012 and is briefly summarized in Section 4.4 below. Note also that the MQO threshold remains always unity regardless of the pollutant or scale considered. Details on these interpretations are available in METHOD2012.

For annual average values, the MQO expressed in (1) reduces to

$$\mathrm{MQ}O = \frac{BIAS}{2\mathrm{U}(\overline{\mathrm{O}})} \leq 1 \quad \textbf{(2)}$$

4.2. Performance criteria for Bias, R and SD

As described in METHOD2012 the equation relating some statistical indicators among themselves:

$$\frac{\mathrm{RMSE}^2}{(2RMS_U)^2} = \frac{NMB^2}{(2RMS_U)^2} + \frac{(\sigma_\mathrm{M} - \sigma_\mathrm{O})^2}{(2RMS_U)^2} + \frac{2\sigma_\mathrm{O}\sigma_\mathrm{M}(1-\mathrm{R})}{(2RMS_U)^2} \quad \textbf{(3)}$$

can be used to derive performance criteria for 3 other indicators: R, NMB NMSD as follows:

Indicator	Performance criteria	Reference
Bias	$\lvert NMB \rvert < 2\frac{RMS_U}{\overline{O}}$	(4)
Correlation	$R > 1 - 2\left(\frac{RMS_U}{\sigma_O}\right)^2$	(5)
Standard deviation	$\lvert NMSD \rvert < 2\frac{RMS_U}{\sigma_O^2}$	(6)

Table 2: Model performance criteria for Bias, Correlation and standard deviation

It is important to note that the performance criteria for R, NMB and NMSD represent necessary but not sufficient conditions to ensure that the MQO is fulfilled. They are used here

to indicate which aspects of the modeling application need to be improved. Indicative values for these indicators as a function of geographic area or station type are provided in METHOD2012.
Since the performance criteria for R, NMSD and NMB are station and time dependent (through σ_O and the mean concentration), normalized criteria can also be defined from Equation (2), (3) and (4) as follows:

Indicator	Performance criteria	Reference
Bias	$\frac{\lvert \overline{M} - \overline{O} \rvert}{2RMS_U} < 1$	(7)
Correlation	$\frac{(1-R)\sigma_0^2}{(2RMS_U)^2} < 1$	(8)
Standard deviation	$\frac{\lvert \sigma_M - \sigma_O \rvert}{2RMS_U} < 1$	(9)

Table 3: Normalized model performance criteria for Bias, Correlation and standard deviation

One of the main advantages of this approach is to provide a selection of statistical indicators with a consistent set of performance criteria based on one single input: the observation uncertainty U. The main RMSE-based performance criteria (i.e. the MQO) provides a general overview of the model performances while the associated Performance criteria for correlation, standard deviation and Bias can be used to highlight which of the model performances aspects need to be improved.

In previous DELTA versions (up to 3.4) only conditions (**Error! Reference source not found.**, **Error! Reference source not found.**) and (**Error! Reference source not found.**) have been used for visualization purposes. From version 3.5 onwards we differentiate different zones based on the following criteria:

Zone	Bias	Standard deviation	Correlation	MQO	Ref
1	$\frac{NMB^2}{(2RMS_U)^2} < 1$	$\frac{(\sigma_M - \sigma_O)^2}{(2RMS_U)^2} < 1$	$\frac{2\sigma_M \sigma_O (1-R)}{(2RMS_U)^2} < 1$	MQO<1	(10)
2	$0.5 < \frac{NMB^2}{(2RMS_U)^2} < 1$	$0.5 < \frac{(\sigma_M - \sigma_O)^2}{(2RMS_U)^2} < 1$	$0.5 < \frac{2\sigma_M \sigma_O (1-R)}{(2RMS_U)^2} < 1$		(11)
3	$\frac{NMB^2}{RMS_U{}^2} < 0.5$	$\frac{(\sigma_M - \sigma_O)^2}{RMS_U{}^2} < 1$	$\frac{2\sigma_M \sigma_O (1-R)}{RMS_U{}^2} < 1$	MQO<0.5	(12)

Table 4: Criteria used to differentiate the different zones (orange, green and dashed lines limits) in the MQO and MPC diagrams

Zone 1: This is the fulfillment zone (green in diagrams). For the bias, correlation and standard deviation the criteria is calculated by assuming a perfect behavior for the two other statistical indexes (e.g. the criteria for bias is built on the assumption that R=1 and SD_O=SD_M). For yearly averaged values the bias criteria becomes the MQO.

Zone 2: This zone (orange in diagrams) is built from Equation **Error! Reference source not found.**) and checks which of the three error types is dominating (i.e. if a term is larger than

0.5 in $\frac{\mathrm{RMSE}^2}{(2RMS_U)^2} = \frac{NMB^2}{(2RMS_U)^2} + \frac{(\sigma_M - \sigma_O)^2}{(2RMS_U)^2} + \frac{2\sigma_O\sigma_M(1-\mathrm{R})}{(2RMS_U)^2}$ (3

$\frac{\mathrm{RMSE}^2}{(2RMS_U)^2} = \frac{NMB^2}{(2RMS_U)^2} + \frac{(\sigma_M - \sigma_O)^2}{(2RMS_U)^2} + \frac{2\sigma_O\sigma_M(1-\mathrm{R})}{(2RMS_U)^2}$.

This zone still indicates fulfillment but the type of error associated to the selected indicator is dominating.

Zone 3: The error between modeled and observed values lies in the observation uncertainty range. This zone is indicated by a dashed line within the green shaded area

4.3. Performance criteria for high percentile values

The performance criteria described above provide insight on the quality of the model average performances but does not inform on the model capability to reproduce extreme events (e.g. exceedances). For this purpose another performance criteria indicator is defined as follows:

$$I_{perc} = \frac{M_{perc} - O_{perc}}{2U(O_{perc})} \leq 1 \qquad \textbf{(Eq. 13)}$$

where "perc" is a selected percentile value (in our case 95%) and M_{perc} and O_{perc} are the modelled and observed values corresponding to the selected percentile. The denominator is directly given as a function of the observation uncertainty characterizing the O_{perc} value.

4.4. An expression for the measurement uncertainty

In equation **Error! Reference source not found.**), (2) and ($I_{perc} = \frac{M_{perc} - O_{perc}}{2U(O_{perc})} \leq 1$ (Eq. 13) the observation uncertainty (normalization factor) appears as quadratic mean RMS_U, $U(\bar{O})$ or U_{perc}, respectively. The derivation of these uncertainty expressions, allowing a simple implementation and calculation in DELTA is detailed in UNCERT2012 and only the final formulations are provided here. The uncertainty of a single observation value is expressed as:

$$U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2} \qquad \textbf{(Eq. 14)}$$

Where:

- u_r^{RV} represents the estimated relative measurement uncertainty around a reference value (RV) for a reference time averaging, e.g. the daily/hourly Limit Values (LV) of the AQD.
- α is the fraction of the uncertainty around the Limit Value which is non-proportional to the concentration level.

- k is the coverage factor. Each value of k gives a particular confidence level that the true value lays within the interval of confidence consisting in $O_i \pm U$. Most commonly, the expanded uncertainty is scaled by using the coverage factor k = 2, to give a level of confidence of approximately 95 percents. Levels of confidence of 90% and 99% would lead to coverage factors around k=1.40 and k=2.6, respectively. More details are provided in METHOD2012 and UNCERT2012 regarding the link between the confidence levels associated to the measurements and model results on one hand and the confidence level associated to the modeled-to-measured differences as used in the MQO (see Eq. 1).

From Equation $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14) it is possible to derive a simplified expression for RMS_U as:

$$RMS_U = ku_r^{RV}\sqrt{(1-\alpha)(\overline{O}^2 + \sigma_0^2) + \alpha * RV^2} \quad \text{(Eq. 15)}$$

where σ_0 is the standard deviation of the measured time series.
For model producing annual averages, the uncertainty is expressed as:

$$U(\overline{O}) = ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p^*}\left(\overline{O}^2 + \sigma_o^2\right) + \frac{\alpha * RV^2}{N_{np}}} \cong ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p}\overline{O}^2 + \frac{\alpha * RV^2}{N_{np}}} \quad \text{(Eq. 16)}$$

where N_p and N_{np} are used for annual averages only and account for the compensation of errors due to random noise and other factors like periodic re-calibration of the instruments. For annual averages, the standard deviation term is assumed to be linearly related to the observed mean value. The calculation of the N_p coefficient accounts for this assumption (see Method 2012 and UNCERT2012 (working document) for more details).

For the percentile uncertainty used in equation $I_{perc} = \frac{M_{perc} - O_{perc}}{2U(O_{perc})} \leq 1$ (Eq. 13 $I_{perc} = \frac{M_{perc} - O_{perc}}{2U(O_{perc})} \leq 1$ (Eq. 13), equation ($U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14 $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14) is used with $O=O_{perc}$.

The following values have been proposed (UNCERT2012). Note that the value of alpha for PM2.5 referred to in the UNCERT2012 – working note has been arbitrarily modified from 0.018 to 0.050 in order to avoid larger uncertainties for PM10 than PM2.5 in the lowest range of concentrations.

	k	u_r^{LV}	LV (ug/m3)	α	Np	Nnp
NO2	2.00	0.120	200	0.040	5.2	5.5
O3	1.40	0.090	120	0.620	NA	NA
PM10	2.00	0.140	50	0.018	40	1
PM25	2.00	0.180	25	0.05	40	1

WS (test)	2.00	0.130	5	0.800	NA	NA
TEMP (test)	2.00	0.025	25	1.000	NA	NA

Table 5: List of the parameters used to calculate the uncertainty (see formulas (12) and (13))

The values reported in this table can be used to produce uncertainty curves for each compound (see figures below).

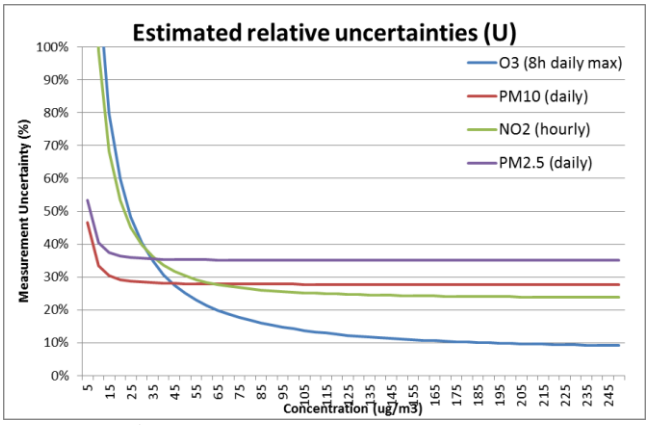

Figure 2: Relative uncertainties for daily averaged PM10 and PM2.5, hourly NO2 and 8h daily maximum O3 as a function of concentratioon level (from equation $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ **(Eq. 14 and parameters in above Table)**

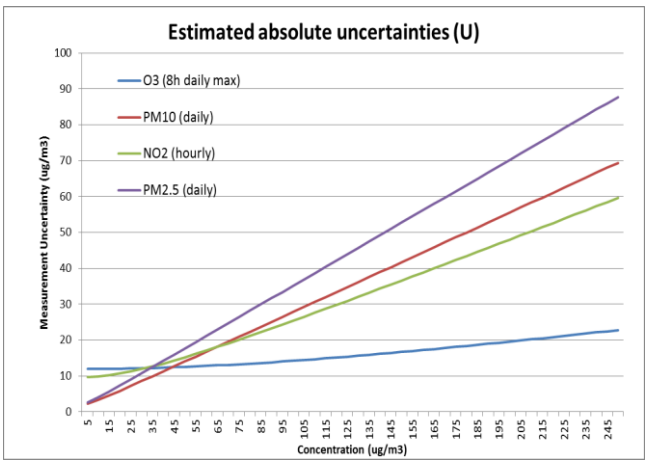

Figure 3: Absolute uncertainties for daily PM10 and PM2.5, hourly NO2 and 8h daily maximum O3 as a function of the concentratioon level (from equation $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ **(Eq. 14 and parameters in above Table)**

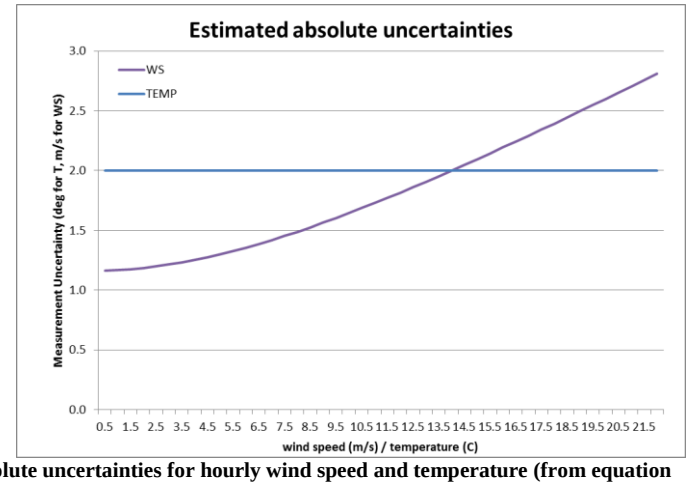

Figure 4: Absolute uncertainties for hourly wind speed and temperature (from equation $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ **(Eq. 14 and parameters in above Table)**

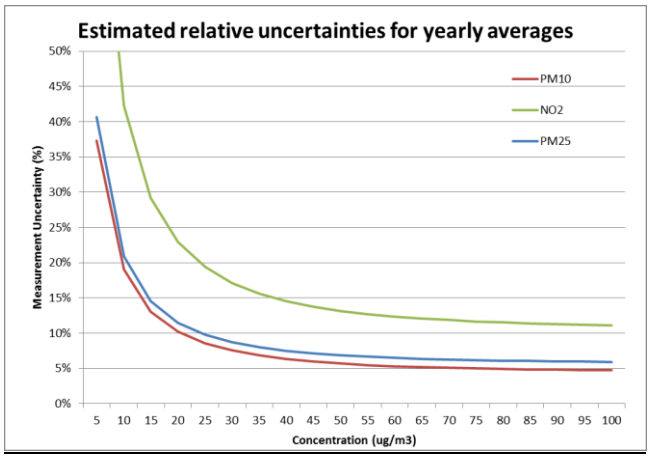

Figure 5: Relative uncertainties for yearly PM10, PM2.5 and NO2 as a function of the concentratioon level (from equation $U(\overline{O}) = ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p^*}\left(\overline{O}^2 + \sigma_o^2\right) + \frac{\alpha * RV^2}{N_{np}}} \cong ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p}\overline{O}^2 + \frac{\alpha * RV^2}{N_{np}}}$ **(Eq. 16 and parameters in above Table)**

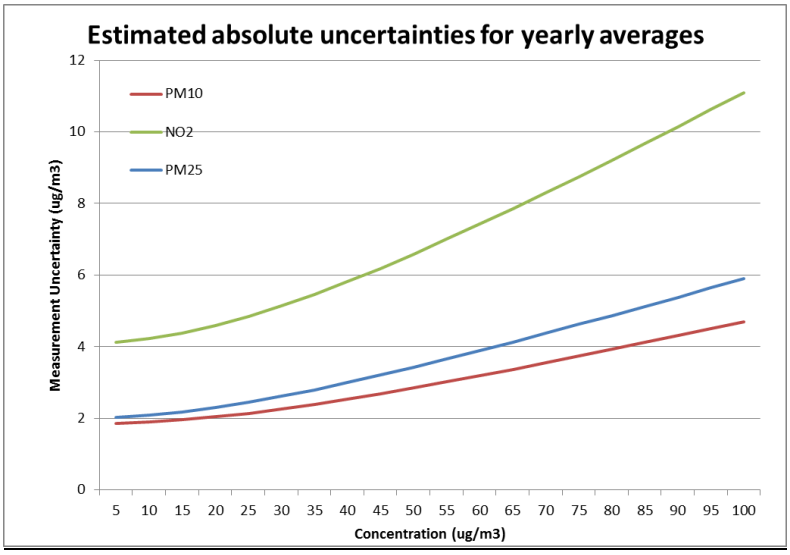

Figure 6: Absolute uncertainties for yearly PM10, PM2.5 and NO2 as a function of the concentratioon level (from equation $U(\overline{O}) = ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p^*}\left(\overline{O}^2+\sigma_o^2\right)+\frac{\alpha * RV^2}{N_{np}}} \cong ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p}\overline{O}^2+\frac{\alpha * RV^2}{N_{np}}}$ **(Eq. 16 and parameters in above Table)**

In the figure below we compare the formulations ($U(O) = ku_r^{RV}\sqrt{(1-\alpha)O+\alpha * RV^2}$ (Eq. 14) and $RMS_U = ku_r^{RV}\sqrt{(1-\alpha)(\overline{O}^2+\sigma_0^2)+\alpha * RV^2}$ (Eq. 15) for a single value and a time series respectively. For visualisation purposes we assume that a linear relationship holds between the squared mean and the sum of the squared mean and variance of the observations, i.e. $\overline{O}^2+\sigma_0^2 = \eta\overline{O}^2$. Based on 2009 yearly observations, the following values of η have been used (0.3 for NO2, 0.6 for PM10 and PM2.5 and 0.1 for O3). Note that this linear simplification is done here for visualisation purposes only while the full formulation $RMS_U = ku_r^{RV}\sqrt{(1-\alpha)(\overline{O}^2+\sigma_0^2)+\alpha * RV^2}$ (Eq. 15) is used in DELTA.

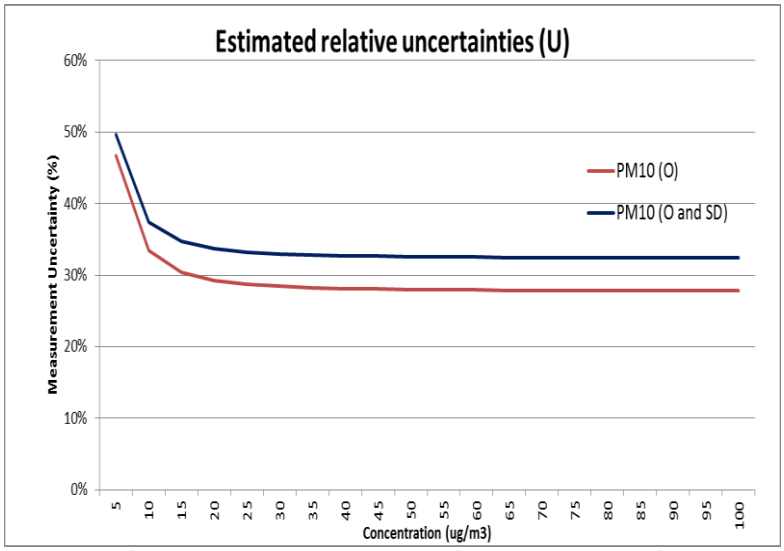

Figure 7: Comparison of daily averaged PM10 uncertainty for a single value and for an entire time series. [comparison of formulations $U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ **(Eq. 14 referred to as (O) in figure) and** $RMS_U = ku_r^{RV}\sqrt{(1-\alpha)(\overline{O}^2 + \sigma_0^2) + \alpha * RV^2}$ **(Eq. 15 referred to as (O and SD) in figure)]**

For communication (to public/stakeholders) purposes the formulation of the uncertainty proposed here can be substituted quite efficiently by a simpler linear formulation which is detailed in the Annexes.

4.5. The 90% principle

For all statistical indicators used in DELTA for benchmarking purposes the approach currently used in the AQD has been followed. This means that model performance criteria must be fulfilled for at least 90% of the available stations. Given the integer nature of the station number this criteria sometimes means a larger than 90% of the available stations to fulfil the criteria. For example all stations will need to fulfil the criteria if the number of stations is lower than 10. This point is also relevant when considering group of stations (see User's Guide Section 4.1) when the 90% option is selected; the number of stations which can be discarded and the effective percentage of stations kept within a given group depends on the number of stations composing this group.

5. Benchmarking report

These reports are currently available for the hourly NO2, the 8h daily maximum O3 and daily PM10.

5.1. Hourly frequency

Target Diagram (Fig2 Upper diagram)

The MQO as described by Equation (1) is used as main indicator. In the normalised Target diagram, it represents the distance between the origin and a given station point. As mentioned above the performance criterion for the target indicator is set to unity regardless of spatial scale and pollutant and it is expected to be fulfilled by at least 90% of the available stations.

The percentage of stations fulfilling the target criterion is indicated in the upper left corner and is meant to be used as the main indicator in the benchmarking procedure. As mentioned above, values higher than 90% must be reached. In addition to the information mentioned above the proposed Target diagram also provides the following information:

- A distinction between stations according to whether their error is dominated by bias (either negative or positive), by correlation or standard deviation.

- Identification of performances for single stations or group of stations (e.g. different geographical regions in this example) by the use of symbols and colours.

More details on this adapted Target diagram can be found in METHOD2012.

Summary Report (Fig.2 Lower diagram)

The summary statistics table provides information on model performances. It is meant as a complementary source of information to the MQO (upper diagram) to identify model strengths and weaknesses. It is structured as follows:

- ROWS 1-2 provide the measured observed means and number of exceedances for the selected stations.
- ROWS 3-6 provide an overview of the temporal statistics for bias, correlation and standard deviation as well as information on the ability of the model to capture the highest range of concentration values. Each point represents a specific station. Values for these four parameters are estimated by equations (5), (6),(7) and (11) respectively. The green shaded area represents criteria fulfilment. The orange shaded area (for the three first indicators) represents fulfilment but the error associated to the particular statistical indicator is dominant (see Section 4.2 and Table 4 in particular for more details). **Note again that fulfilment of the bias, correlation,standard deviation and high percentile related indicators does not guarantee that the overall MQO based on RMSE is fulfilled.**
- ROWS 7-8 provide an overview of spatial statistics for correlation and standard deviation. Average values over the selected time period are first calculated for each station and these values are then used to compute the spatial correlation and standard deviation. Fulfillment of the performance criteria (6) and (7) is then checked for these values. As a result only one point representing the spatial correlation of all selected stations is plotted.. Color shading follows the same rules as for rows 3-5.

The second column provides information on the number of stations fulfilling the performance criteria, Green for above 90% of the stations and red below 90%. Note that for indicators reaching values beyond the proposed scale, the symbol representing the station will be plotted in the middle of the dashed zone on the right/left side of the proposed scale

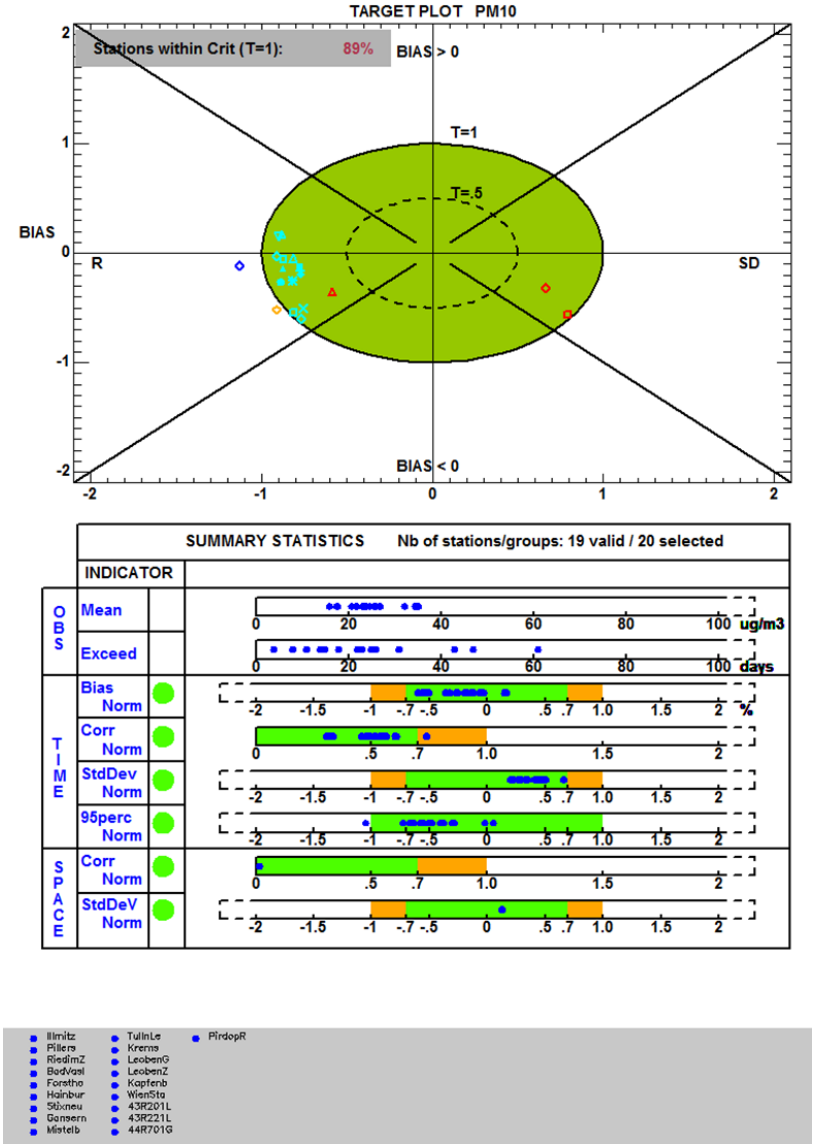

Figure 8: Example of benchmarking performance summary report.

5.2. Yearly frequency

Scatter Diagram (Fig.3 Upper diagram)

The MQO described in Section 4.1 for yearly averaged results (i.e. based on the bias) is used as main indicator. In the scatter plot, it is used to represent the distance from the 1:1 line. As mentioned above it is expected to be fulfilled by at least 90% of the available stations.

The Scatter diagram also provides information on performances for single stations or group of stations (e.g. different geographical regions in this example below) by the use of symbols and colours.

More details on the scatter diagram and possible options can be found in METHOD2012.

Summary Report (Fig.3 Lower diagram)

The summary statistics table provides information on model performances. It is meant as a complementary source of information to the bias-based MQO to identify model strengths and weaknesses. It is structured as follows:

- ROW 1 provides the measured observed means for the selected stations.
- ROW 2 provides information on the fulfilment of the bias-based MQO for each selected stations. Note that this information is redundant with the scatter diagram but kept if the summary report is used independently from the scatter diagram.
- ROWS 3-4 provide an overview of spatial statistics for correlation and standard deviation. Annual values are used to calculate the spatial correlation and standard deviation. Criteria (6) and (7) are here used to check fulfilment of the performance criteria. The same explanation for the green and orange shaded areas as for the hourly report holds.

The second column provides information on the number of stations fulfilling the performance criteria, Green for above 90% of the stations and red below 90%. For indicators reaching values beyond the proposed scale, the symbol representing the station will be plotted in the middle of the dashed zone on the right/left side of the proposed scale

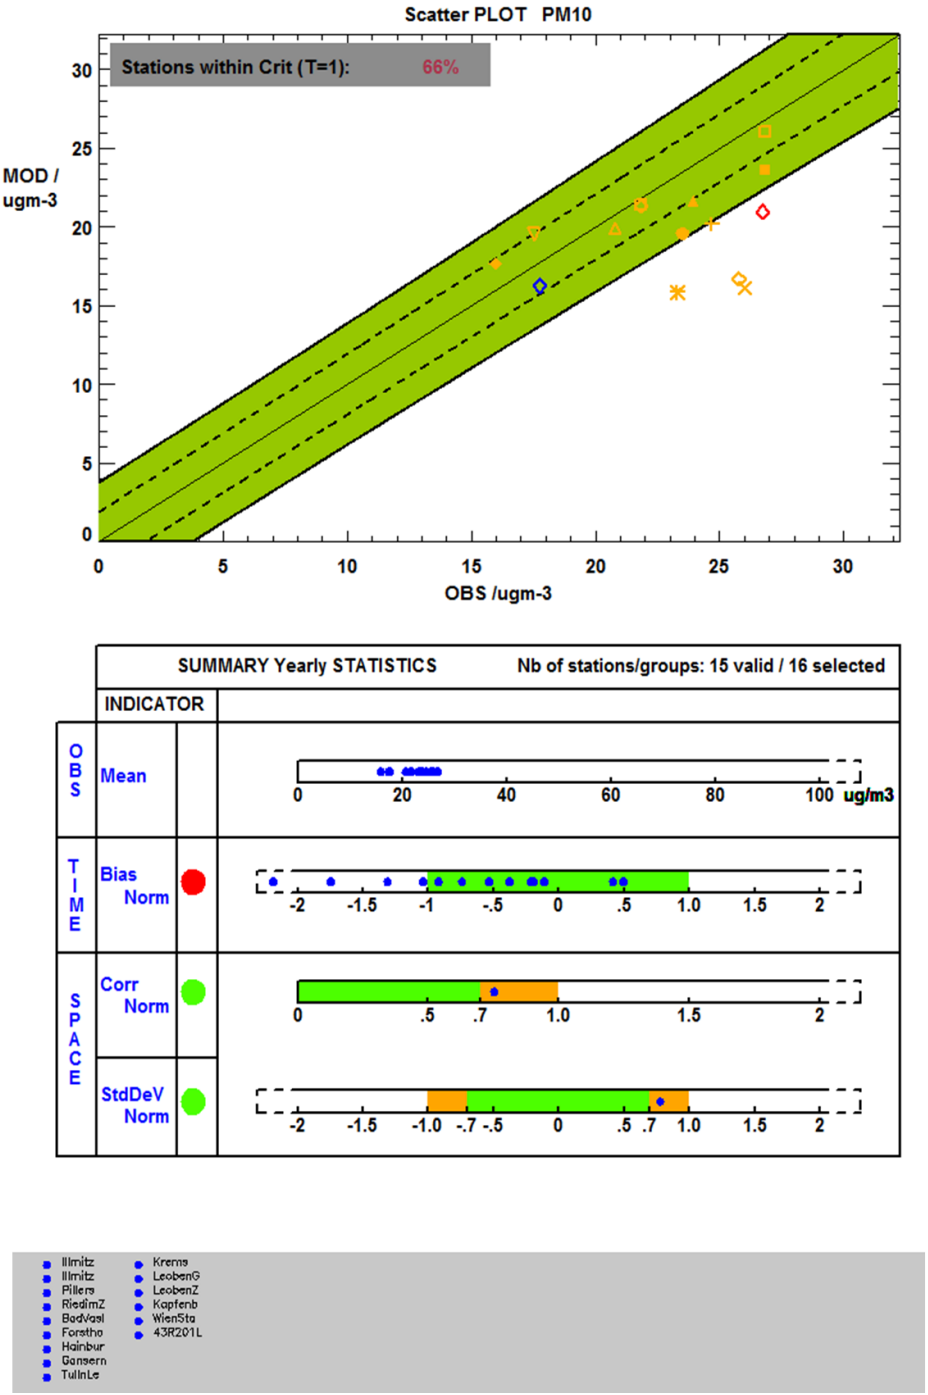

Figure 3: Example of benchmarking performance summary report

6. References

Cuvelier C., P. Thunis, R. Vautard, M. Amann, B. Bessagnet, M. Bedogni, R. Berkowicz, J. Brandt, F. Brocheton, P. Builtjes, C. Carnavale, A. Coppalle, B. Denby, J. Douros, A. Graf, O. Hellmuth, A. Hodzic, C. Honoré, J. Jonson, A. Kerschbaumer, et al., 2007: CityDelta: A model intercomparison study to explore the impact of emission reductions in European cities in 2010. Atmospheric Environment, Volume 41, Issue 1, Pages 189-207

Thunis P., L. Rouil, C. Cuvelier, R. Stern, A. Kerschbaumer, B. Bessagnet, M. Schaap, P. Builtjes, L. Tarrason, J. Douros, N. Moussiopoulos, G. Pirovano, M. Bedogni, 2007, Analysis of model responses to emission-reduction scenarios within the CityDelta project, Atmospheric Environment, Volume 41, Issue 1, January 2007, Pages 208-220

Thunis P., E. Georgieva, S. Galmarini, 2010: A procedure for air quality models benchmarking. (http://fairmode.ew.eea.europa.eu/fol568175/work-groups)

P. Thunis, A. Pederzoli, D. Pernigotti, 2010: Performance criteria to evaluate air quality modeling applications, Atmospheric Environment, Volume 59, November 2012, Pages 476-482

Thunis P., D. Pernigotti and M. Gerboles, 2012: Model quality objectives based on measurement uncertainty: Part 1: Ozone. 2012 Atmospheric Environment, Volume 79, November 2013, Pages 861-868

Pernigotti D., P. Thunis, M. Gerboles and C. Belis.2012. Model quality objectives based on measurement uncertainty: Part II: PM10 and NO2. Atmospheric Environment, Volume 79, November 2013, Pages 869-878

Part II

User’s Guide

1. Installation and running steps

The current version (4) of the Delta tool was installed and developed under a Windows environment. The next steps refer to the installation on a Windows XP machine.

Installation steps

- Go to the IDL Web site http://www.exelisvis.com/language/en-us/productsservices/idl.aspx and register as a new user (or login as an old user). If you register as a new user, you will receive an email with a link to activate your account (this can take 24 hours).

- Go to 'Downloads' – 'Product Downloads', and select: IDL, Windows, Product Download. Click on the version for your operating system (32 bits, or 64 bits).

- Click on the purpose of your download, and your agreement with the laws.

- Click on 'IDL 8.X – Microsoft Windows …' to start the download. Both IDL and IDL-VM will be downloaded (but you need only to use IDL-VM, for which you do not need any license).

- Install "IDL-VM" (i.e. run "idl8X_winXX_setup.exe"). Set the installation directory for example as C:\ITT. At the end of the installation you do NOT have to run the license application ("No").

- Follow next steps instructions on the DELTA home page (http://aqm.ies.jrc.it/DELTA/) under the "Download" section. Password on request

- For convenience, you can change the properties of the IDL8.X-VM icon. Right-click on the IDL8.X-VM icon – go to properties and set the 'Start in' to, e.g. "C:\Delta". The location you specify should be the location, where you have placed the file Delta.sav (this is an IDL executables).

Running steps

- The normal procedure for running an IDL program such as Delta Tool isRun IDL VM (double-click icon).

- In the window browse and select appropriate ".sav".

- Since the program has to read-in the data, it will take some time before it pops up.

- However, in order to run Delta Tool you must first prepare appropriate input files as explained in section **Error! Reference source not found.**. You can also

et started by running a sample data set such as the POMI data set which can be downloaded from the Delta Tool download page.

2. Preparation of input files

In order to run the tool, the following files have to be prepared by the user

- ✓ Two configuration files: <startup.ini> and <init.ini>. The same configuration files can be used for several models and years. The two files should be placed in folder ...\resource. Add something on mydeltainput option
- ✓ Files with observed data (one file for each monitoring station). These files should be in .csv format and be placed in folder ...\data\monitoring
- ✓ Files with modeled data at the locations of the stations (one file per model and scenario). Such files should be in .cdf format (except for yearly averaged modeled data where the choice exists between csv and cdf formats), and there should be one file for each model and year. Each .cdf file may contain model results for several locations (stations). The .cdf files should be placed in folder ...\data\modeling. There is a utility to create such cdf files from csv files (see Section 8.2).

Comment [PT1]: I think this is not quite correct, so it should be reformulated. <startup.ini> includes the year, so one cannot use the same configuration file for a different year.

2.1. Init.ini

The resource folder contains an ASCII file named *init.ini* where specific software (WORD, ADOBE...) location information should be provided. The user should modify the paths according to his personal installation settings. This is needed, e.g, to be able to use the help in the Delta Tool.The right hand side of the following lines (end of the *init.ini* file) should be adapted:

BROWSER_LOCATION=C:\Program Files\Mozilla Firefox\firefox.exe
WORKSHEET_LOCATION=C:\Program Files\Microsoft Office\OFFICE11\EXCEL.EXE
DOCUMENTSREADER_LOCATION=C:\Program Files\Microsoft Office\OFFICE11\WINWORD.EXE
NOTEPAD_LOCATION=notepad.exe
PDFREADER_LOCATION=C:\Program Files\Adobe\Acrobat 7.0\Acrobat\Acrobat.exe
GOOGLEEARTH_LOCATION=C:\Program Files\Google\Google Earth\client\googleearth.exe

REMARK: This *init.ini* file is not to be confused with the init.ini file that has to be copied to the IDL folder (e.g. C:\Program Files\Exelis\IDL8X) as explained on the download page. This second init.ini has only one line with the path to the DELTA TOOL data (e.g. C:\DELTA).

2.2. Startup.ini

The configuration file (startup.ini) is common to both inputs with hourly and yearly frequencies. It is located in ...\resource. The file is in ASCII format and contains some general information about the spatial scale, the parameters selected for evaluation and the characteristics of the monitoring stations. The file has three main sections:

- MODEL – includes information about the year, spatial scale and input frequency.
- PARAMETERS - includes variable names and measurement units
- MONITORING – includes list of all stations with their siting characteristics and parameters measured.

The following conventions apply:

- Each blank row or each line beginning with "[", ";" or "#" will be discarded
- No blanks between fields are permitted
- Line breaks are not allowed.
- The three section headers: “[MODEL]”, “[PARAMETERS]” and “[MONITORING]” are compulsory,
- Station codes must be unique.
- The station names should not include blanks and special characters such as “.”,” ’ ”, “;”
- Only the symbol “_” is allowed.
- Variables must be separated by an asterisk.
- The station names must be EXACTLY the same used in the observation data files and modeled data files.

Example:

```
[MODEL]
;Year
;frequency
;Scale
2009
hour
urban
[PARAMETERS]
;Species*type*measure unit
SO2;POL;µgm-3
NO2;POL; µgm-3
PM25;POL; µgm-3
PM10;POL; µgm-3
WS;MET; m/s
TEMP;MET; C
[MONITORING]
Stat_Code;Stat_Name;Stat_Abbreviation;Altitude;Lon;Lat;GMTlag;Region;Stat_Type;Area_Type;Siting; listOfvariables
IT00000;station0;STAT0;681.;8.931;44.31;GMT+1;Lombardia;Background;Urban;Plane;TEMP*PM10*O3;
IT00001;station1;STAT1;962.;10.03;44.97;GMT+1;Veneto;Traffic;SubUrban;Hilly;TEMP*O3;
IT00002;station2;STAT2;851.;11.34;44.18;GMT+1;Piemonte;traffic;urban;Mountain;WS*PM10*O3*SO2;
IT00003;station3;STAT3;806.;7.597;46.02;GMT+1;Emilia-Romagna;Industrial;Rural;Valley;WS;
IT00004;station4;STAT4;769.;8.222;44.29;GMT+1;Lombardia;Background;Urban;Plane;TEMP*O3;
IT00005;station5;STAT5;163.;9.193;45.85;GMT+1;Friuli Venezia Giulia;Unknown;Unknown;Coastal;PM10;
...
<EOF>
```

Comment [PT2]: Explain

Description:

Comment [PT3]: Are the various parameters case sensitive

[MODEL] section:
The first three lines are just comments

- *Year*: year of interest (for bissextile years only first 8760 data are considered)
- *Frequency*: Either hour or year. This parameter should be set to "hour" for models delivering outputs with an hourly or daily frequency and set to "year' for models delivering outputs as annual averages (see User's Guide Section 2.5).
- *scale*: Either local (traffic), urban or regional. But not used currently

[PARAMETERS] section:
The first line is a comment which gives a hint of the contents of the following lines:

Comment [PT4]: The subsequent rows end with a semicolon. Is this necessary? Obviously, it is not required for lines in the other sections.

- *Species*: name of the variable
- *Type*: "POL" and "MET" indicate air quality and meteorological variables respectively. These categories are created to facilitate filtering during the selection phase and can be defined by the user at his convenience.
- M*easure units*: the units MUST be µgm-3 for concentrations. For the other variables, see the notes below.

Notes:

- Each line contains the name of a parameter, the type and the measurement unit, separated by semicolons. The parameters are those available in the dataset. It is permitted to have lines with parameters not present in the dataset. The sequence of parameters is irrelevant..
- Some parameter names and units are pre-assigned and should obligatory be followed (since they are used in the benchmarking procedure): O3 [µgm-3], NO2 [µgm-3], PM10 [µgm-3], WS [ms-1], WD [deg] (wind speed and wind direction), TEMP [degC] - temperature, SH [g/kg] (specific humidity)

[MONITORING] section

The first row contains the labels. The labels currently referred to as: region, station type, area type and siting can be modified by the user and will appear as modified in the data selection window. Each subsequent row refers to a given station, where:

- *Stat_Code*: national identification of the station e.g. AT0001ST, or VEN00356, or user's assigned code (e.g. STAT001)
- *Stat_Name*: combination of letters and/or numbers ; only the symbol "_" is allowed blanks and special characters are not allowed
- *Stat_Abbreviation*: station name abbreviation (4 letters). The abbreviation will be the one identifying the station on the DELTA output graphs and statistics
- *Altitude*: height above sea level (in meters)

- *Lon, Lat*: Longitude and Latitude (in decimal degrees)
- *GMTlag*: Time zone
- Region: Name of the administrative region to which the station belongs. In alternative – a user defined region (Naming rules similar to "Stat_Name")
- *Stat_Type*: background, traffic, industrial
- *Area_Type*: urban, suburban, rural
- *Siting*: Categories are proposed: mountain, hilly, plane, valley or coastal. They will be used eventually to group stations and calculate average statistics for each group; If other categories suit better user's stations, they can be defined here.
- *listOfvariables*..: The variables measured at each station , (PM10, O3, WS etc). The variables are separated by an asterisk.

Notes:

- It is left to the user to assign appropriate fields to classify stations. In our example, REGION, STAT_type, Area_Type and Siting are selected but other choices could have been made. These choices will configure the widget menus to help with the selection of stations according to the chosen fields.
- There are a few modifications between the version 2.0 and 3.0 (or later) of the startup.ini. However the user can use its version 2.0 of the file with newer DELTA versions. The startup file will update automatically and three new lines will be inserted.

2.3. Observation file

2.3.1. Hourly Frequency

Monitoring stations to be used with the tool may have either air quality data, either meteorological data or both.

Files names and type:

- Each station must have an associated file containing the data in comma separated format and with extension .csv, e.g. "**station1.csv"**
- The file names should be consistent with the naming rules used in the configuration file (startup.ini).

Files location:

….\data\monitoring

Files structure:

The first row must contain the labels of the columns: year (4 digits), month (1-12), hour (0-23) and the names of the observed parameters at each station. Following lines should include the observed values on an hourly basis (8760 rows (or 8784 for leap year) if entire year is available). If for a given hour data are missing for all parameters, the line can be omitted. Data are recognized by their associated date and time.

Example: filename <station1.csv>

```
year;month;day;hour;O3;PM10;WS;WD;TEMP;
2005;1;1;0;40.1;55.4;0.75;310;15.6;
2005;1;1;1; 40.1;55.4;0.75;310;15.6;
2005;1;1;2; 40.1;55.4;0.75;310;15.6;
…
2005;12;31;23; 40.1;55.4;0.75;310;15.6;
<EOF>
```

Comment [HRO5]: All lines in the file end with semicolon. Is this necessary? It in not the default for Excel to put a semicolon at the end of lines, so it makes things more complicated if a user has to prepare data like this.

Particular requirements:

- The station names used in startup.ini must be used for each one of these files.
- For non-annual average values each file must contain observation values on an hourly basis. For leap years, data for February 29th may be included in the files.
- Data will be read by dates. Missing dates (i.e. lines) will automatically be treated by DELTA as -999.
- If data are monitored on a daily basis (e.g PM10), please put the daily value at <u>all</u> hours from 0 to 23 for this day.

Remark: Daily deposition observations (for example rain) should be distributed over the 24 hours of the particular day.

- If both air quality and meteorological measurements are available for the same site, the data must be included in the same file (as in the example above)
- Each blank row or beginning with "[", ";" or "#" "#" will be discarded
- No spaces are permitted between the fields.
- Line breaks are not allowed.

2.3.2. Yearly Frequency

Files names and type:

- Each station must have an associated file containing the data in comma separated format and with extension .csv, e.g. "**station1.csv"**
- The file names should be consistent with the naming rules used in the configuration file <startup.ini> (see Section 2.2).

Files location:

….\data\monitoring

Files structure:

The first row must start with the label “YearlyAvg” to indicate that yearly averaged results are used. Should follow the year (4 digits) and species of interest. All fields should be separated by semi-column. Row 2 should contain the numeric observed values for the parameters mentioned in row 1.

Example: filename <station1.csv>

YearlyAvg;2009;PM10;NO2;WS
; parameter1;parameter2;parameter3
55.1;15.6; 2.1
<EOF>

Particular requirements:

- The station names used in startup.ini must be used for each one of these files.
- If data are missing the gaps should be filled by -999.
- If both air quality and meteorological measurements are available for the same site, the data must be included in the same file (as in the example above)
- Each blank row or beginning with "[", ";" or "#" "#" will be discarded
- No spaces are permitted between the fields.
- Line breaks are not allowed.

2.4. Model file

2.4.1. Hourly Frequency

Modeled data can be prepared in one of the following formats:

- netcdf (option 1) format (one single file for a given model and time period with separate ncdf-variables for each station and species)

- netcdf (option 2) format (one single file for a given model and time period and species with separate ncdf-variables for each station)

- csv format (similar to the one described for the observations) Such files cannot be used directly, but a utility (an IDL processor) is provided on the Delta Tool web site to convert them into netcdf format.
-

Description of the netcdf (option 1) format

- One single netcdf file should be provided for a given model. It must contain a time profile for each station and variable listed in <startup.ini >.

- The names of the parameters should be the same as in the configuration file <startup.ini>.

- The units in the netcdf file should be the same as specified in startup.ini

Files location:

….\data\modeling

Files structure:

Each data block inside the netCDF file should be named as "Stat_name_Parameter" (see examples below) where "Stat_name" is the name of the station corresponding to the one set in the <startup.ini >, and "Parameter" refers to the modeled pollutants and meteorological variables, as indicated in the <startup.ini >

Each data block should contain either (a) 1 year of hourly data for each station and parameter (1dimensional array with 8760 hourly data) or (b) a specific time period smaller than the entire year. In the latter case an additional attribute should be included in the netCDF file to set the initial starting time (in hours) as follows (global attributes: StartHour = 1320 indicating that the period of interest starts at hour=1320). Within the specific time period data should be continuous, i.e. include missing values as "-999".

In the case of a leap year model results for February 29th should be included if the period contains this day.

Modeled data at a given station may contain either air quality fields, meteorological fields or both.

Example: <2008_WRFCHIM_TIME.cdf>

```
netcdf 2008_WRFCHIM_TIME.cdf {
dimensions:
  T = 8760 ;
variables:
  float station0_CO2(T);
  float station1_NO2(T);
  float station1_WS(T);
  float station1_WD(T);
  float station2_CO2(T);
  float station2_NO2(T);
  float station2_WS(T);
  float station2_WD(T);
}
```

Example: <2008_WRFCHIM_TIME.cdf> with time period less than entire year

```
netcdf 2008_WRFCHIM_TIME.cdf {
```

```
dimensions:
  T = 744 ;
global attributes:
 StartHour = 1320s;
variables:
  float station0_CO2(T);
  float station1_NO2(T);
  float station1_WS(T);
  float station1_WD(T);
  float station2_CO2(T);
  float station2_NO2(T);
  float station2_WS(T);
  float station2_WD(T);
}
```

Particular requirements:

- If a parameter is entirely missing (i.e. not provided by the model) for a station, but the same parameter is present in the monitoring dataset for the same station, the user must include that parameter in the *.netcdf file as a hourly series of "-999".

Description of the netcdf (option 2) format

- One single netcdf file should be provided for a given model and species. It must contain a time profiles for each station listed in <startup.ini >.

- All parameters within a given variable (e.g. NO2, PM10...) should be listed in a systematic order defined in a global attribute

- The names of the parameters should be the same as in the configuration file <startup.ini> (see Section 2.2).

Files location:

….\data\modeling

Files structure:

Each data block inside the netCDF file should be named as "Stat_name_Parameter" (see examples below) where "Stat_name" is the name of the station corresponding to the one set in the <startup.ini >

Each data block should contain either (a) 1 year of hourly data for each station and parameter (1dimensional array with 8760 hourly data, or 8784 for leap year). Or (b) a specific time period smaller than the entire year. In the latter case an additional attribute should be included in the netCDF file to set the initial starting time (in hours) as follows (global attributes: StartHour = 1320 indicating that the period of interest starts at hour=1320). Within the specific time period data should be continuous, i.e. include missing values as "-999".

Modelled data at a given station may contain either air quality fields, meteorological fields or both.

Example: <2008_CHIM_TIME.cdf>

```
netcdf 2008_CHIM_TIME.cdf {
dimensions:
  V = 3 ;
  T = 8760 ;
variables:
  float station0 (T,V);
  float station1 (T,V);
  float station2 (T,V);
// global attributes :
  : Parameters = 78b, 79b, 50b, 32b, 80b, 77b, 49b, 48b, 32b, 79b, 51b ;
}
Here '78b, 79b, 50b, 32b, 80b, 77b, 49b, 48b, 32b, 79b, 51b' is the byte
format of 'NO2 PM10 O3'.
```

Example: <2008_CHIM_TIME.cdf> with given time period (less than entire year)

```
netcdf 2008_CHIM_TIME.cdf {
dimensions:
  V = 3 ;
  T = 744 ;
global attributes:
 StartHour = 1320s;
variables:
  float station0 (T,V);
  float station1 (T,V);
  float station2 (T,V);
// global attributes :
  : Parameters = 78b, 79b, 50b, 32b, 80b, 77b, 49b, 48b, 32b, 79b, 51b ;
}
Here '78b, 79b, 50b, 32b, 80b, 77b, 49b, 48b, 32b, 79b, 51b' is the byte
format of 'NO2 PM10 O3'.
```

Particular requirements:

If a parameter is entirely missing (i.e. not provided by the model) for a station, but the same parameter is present in the monitoring dataset for the same station, the user must include that parameter in the *.netcdf file as a hourly series of "-999".

Description of modelled data in csv format (option 3)

Files in csv format cannot be used directly. A utility (an IDL processor) is provided on the Delta Tool web site (link to utilities on the download page) to convert them into netcdf format. You are referred to a readme file accompanying this tool for an explanation of the format.

2.4.2. Yearly Frequency

Modeled data should be prepared in ASCII (csv*)* format. One single file should be provided for a given model. It must contain annual average values for each station listed in <startup.ini >.

File name: <YEAR_MODELNAME_TIME.csv>

Files location: .\data\modeling

Files structure:

```
YearlyAvg;2009;O3;PM10...
;Station;ValueParam1;ValueParam2...
Illmitz;40.3;45.34
Pillers;78;54.54
...
```

2.5. Using DELTA with yearly output

By default the input files are configured for hourly frequency models but for models delivering annual averages it is possible to tune all configuration files to keep only relevant diagrams and elaborations within the selection menus (e.g. all diagrams using correlation will be discarded).For doing this, go in your startup.ini file and set the frequency parameter to "year".

3. Delta Tool top menu

When starting Delta Tool the upper right-hand corner contains a menu that allows you, e.g. to run a Benchmark, and to save and retrieve selections you have made.

- **File**
  - Save image: Save main window diagram in various format (jpeg, tif...)
  - BatchComposition: Allow the user to create his own batch composed of 1 to 4 different graphics
  - BatchSave: Save current elaboration as batch
  - BatchRestore: Restore batch from existing ones.

- Exit
- **Benchmark** (see Section 4)
  - Assessment
    - daily 8h maximum O3
    - Daily averaged PM10
    - Hourly NO2
    - Yearly PM10
    - Yearly NO2
  - Planning (not available yet)
- **Mode**
  - Select mode (inactive)
  - Hide/Show Recognize Info: Mouse recognize window is turned on/off
- **Data selection**
  - Select data: Opens the "Data selection" window (similar to "data selection").
  - Save data: Save current "data selection"
  - Restore data: Restore "data selection" from existing ones.
- **Analysis**
  - Select Analysis: Opens the "Analysis" window (similar to "Analysis").
  - Save Analysis: Save current analysis choices.
  - Restore Analysis: Restore "analysis" from existing ones
- **Help**
  - Help file: Open the current DELTA version User's guide (pdf format). The correct directory in which "adobe.exe" is located should be specified in the "init.ini" file in the "resource" directory.
  - Data check Integrity Tool: Open an independant window with the Check-IO processor to check consistency of the input data (see Section 8.1)
  - Delta WWW: Open the DELTA WWW homepage. The correct directory in which the browser executable is located should be specified in the "init.ini" file in the "resource" directory.
  - About: Version information
  - Disclaimer:

4. Exploration mode

In order to calculate a given statistical indicator and visualize it by a diagram the user has first to make selections in two interface windows – "data selection" and "analysis window" (activated through the starting window, see Section 4). The data selection and analysis interfaces are described in sections 4.1 and 4.2 respectively. Finally the main DELTA graphical interface, which reflects the options previously selected by the user in the two interface windows, is described in section 4.3.

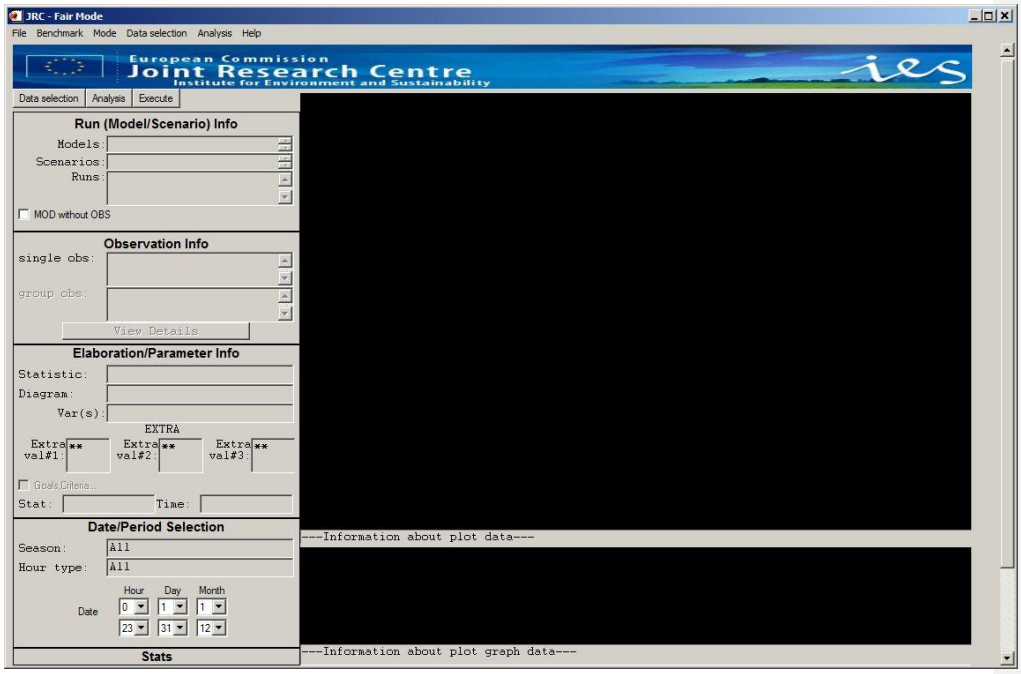

Figure 9 The DELTA main interface (starting window)

4.1. The data selection interface

A selection has to be made by the user in terms of

- a model/scenario (year) pair
- a parameter (e.g. NO2)
- a monitoring station

An example is given in Figure 10.

In brief, the selections are made in the following way:

- **Model selection**: In the left pane select one or more models + scenarios.
- **Parameter selection**: In the right pane first select Type, then Parameters (you may select several elements by Ctrl + Click).
- **Station selection:** The panels Region, Station Type, Area Type and Siting indicate some filters, which may help you in selection of stations. Apply relevant filters, so the panel Available becomes populated with some stations. Use Ctrl + Click on those you wish to select. Finally, click the Add button to make the selection effective.
- **Optionally save:** You may save the list of stations by clicking the 'Save Obs' button (the 'Load Obs' button allows you to retrieve a previously saved list).

Some more details follow.

Various filters are available to facilitate the selection of the appropriate monitoring stations in terms of regions, types. These filters are defined in the configuration file <startup.ini>, where the user can make the station classification categories case specific.
Note: When a user selects a parameter (e.g. O_3) in the "data selection" window, all stations measuring that parameter automatically appear in the "available" section. The user can then make his selection among these available stations and add them in the “selected” section. At this stage the user can still change his mind and select another parameter (e.g. PM10). The list of selected stations will be updated after warning the user.

The user has the possibility to save his choices and to reload them at a later time. Two modalities exist which can be useful to avoid repeating frequently used selections.

Modality (1): In order to save the selections in the data selection window, choose “save data” from the top “data selection” pop up menu. A new window appears with the request to put a file name. File extension must be *.elb. By default the file is saved in the dir…. \save. To reload the saved selections, -choose “restore data” from the top “data selection” pop up menu.

Modality (2): In order to save the station selection only, press the button ‘save obs’ in the lower right corner of the data selection window. A new window appears with the request to put a file name. File extension will be *.obl. By default the file is saved in the dir…. \save. To reload the saved selections, -press the button “Load Obs”.

A set of stations can either be treated as a number of single entities or as a group. In the case of groups the user will be asked to select between “mean” and “90% percentile”options. In the first case the mean of the stations statistical indicators will be represented as a single number on the diagram whereas in the second option the worst statistical indicator among 90% of the available stations (rejecting 10%) is selected. This latter choice is used with diagrams in which performance criteria are present and indicate whether this criterion is fulfilled for the selected group of stations.

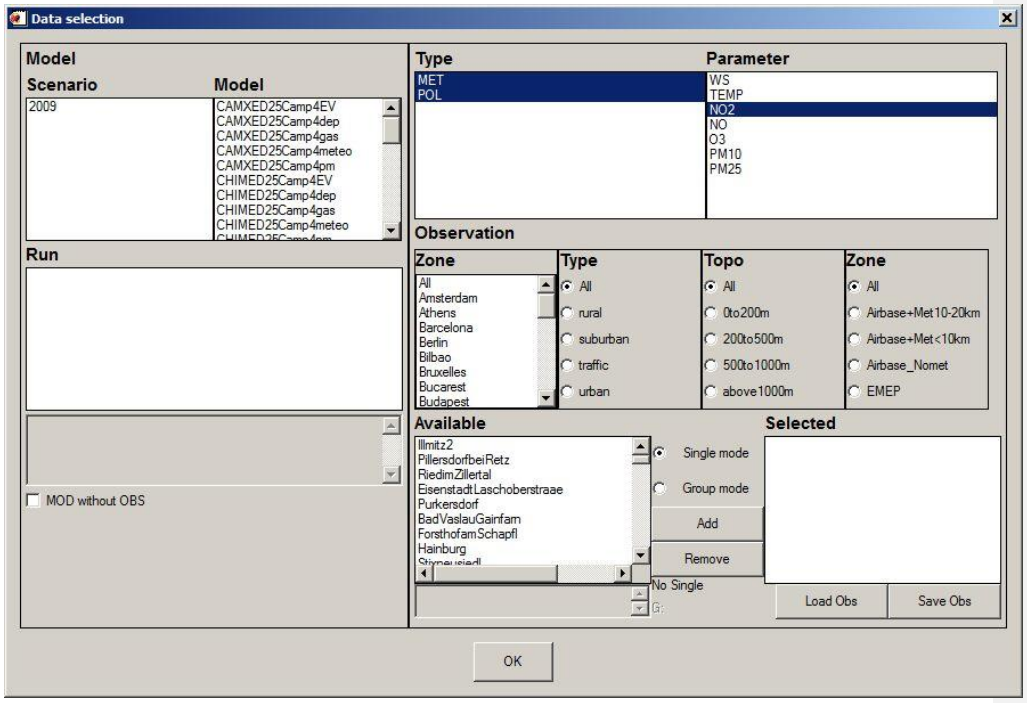

Figure 10: DELTA data selection interface. Example of EC4 macs stations from the EuroDelta modeling exercise

4.2. The analysis interface

The analysis interface (Figure 11) allows the user to select the type of statistics and diagram, as well as the desired temporal operations to be performed on the original data ("Time Avg" and "Daily Stats"). Available diagrams are described in the Annexes Section (Part III).

Each of these plot types can be selected to illustrate different statistical metrics (statistics column). This is especially true for the barplots which is the common way to visualise single statistical metrics (Mean, RMSE, bias, IOA, Exceedance days...). Some of these statistics require threshold values which can be included (e.g. SOMO, Exceedance days…) on the same window. The field for threshold values should contain numbers separated by an #.

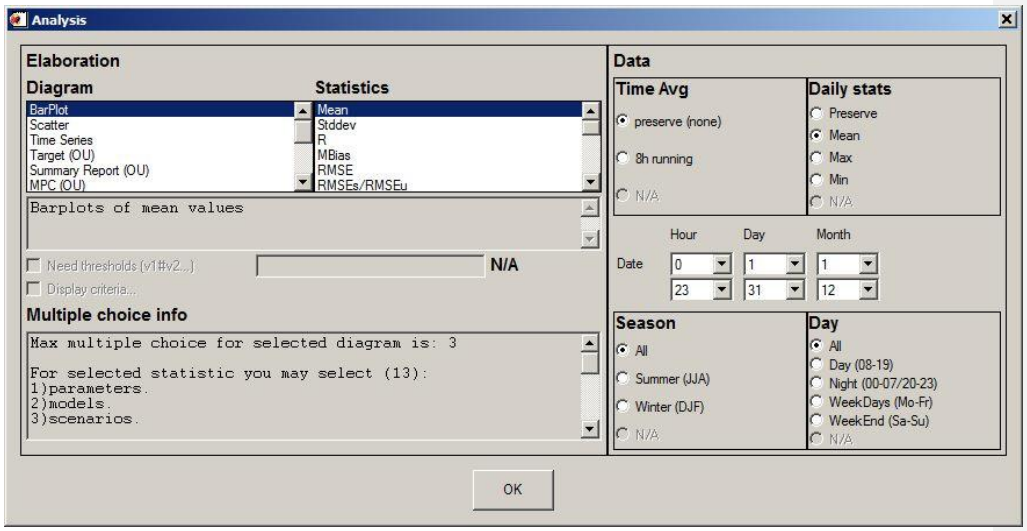

Figure 11: DELTA analysis selection interface

The lower left part of the analysis selection interface ("multiple choice info") gives information on the different possibilities offered to the user in terms of combination of parameters, stations, and models to generate the diagram. These possibilities give the degree of freedom in selecting items of the four main entities: scenario (year); model; parameter; monitoring stations. The allowed multiple choices for a given diagram are pre-defined in the tool and are described in the Annex.

On the right side of the analysis selection interface, time operations can be chosen to be performed on the selected modelled-observed data pairs, i.e.:

- **Time Avg**.: Time series kept as originally formatted (preserve or 1h) or 8h running average
- **Daily Stats**: Statistical operation applied for each day: mean, max or min.
- **Season**: choice between summer, winter and entire year
- **Day**: Selection between night time hours, daylight hours, entire 24h day, week-ends and week days.

Note that for some statistics and pollutant choices, these flags will be automatically filled to the adequate values.

This feature can be useful if you repeatedly use the same set of selections. In order to save the selections in the analysis window, use the top menu in Delta Tool: click the item "Analysis" and choose "Save Analysis" in the drop-down menu. A new window appears with the request to put a file name. File extension must be *.elb. By default the file is saved in the dir…. \save. To reload the saved selections, click the item "Analysis" on the top menu and choose "Restore Analysis"..

4.3. The main graphical interface

When you have made your selections in the data selection window and the analysis window you can press the 'Execute' tab. This brings you to Delta Tool's main graphical interface (unless you have made selections that the tool does not support).
The screen is divided into two main areas:

- The left side recapitulates the choices made by the user in the previous interfaces which lead to the generation of a given diagram.

- The right side hosts the diagram and accompanying legend (which also summarizes the options selected by the user). Only one diagram is shown at a time (i.e. no multiple windows).

-

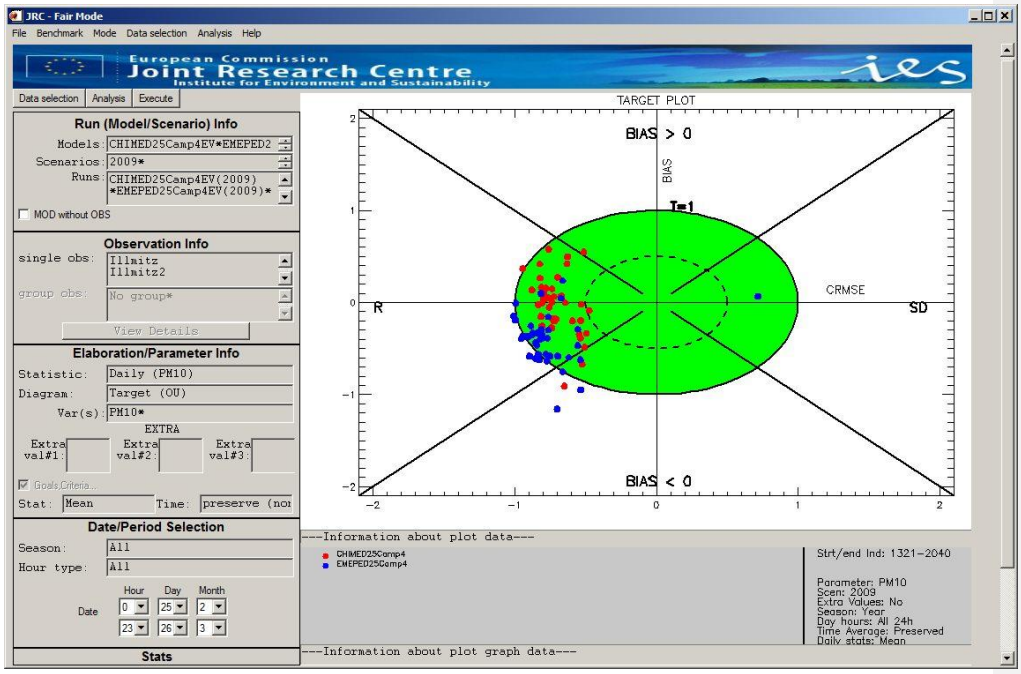

Figure 12: DELTA main graphical window. The example shown is the target plot for daily PM10 as calculated by two models (red and blue) , over the period 25 February 2009 0hr (hour 1320) until 26 March 2009 23hr (hour 2039). Each dot in the diagram corresponds to a station.

5. DELTA functionalities and user's tuning options

5.1. "Playing" with uncertainty parameters: the "goals_criteria_oc" input file

In the configuration file "goals_criteria_oc.dat" the user can find lines of the type:

3;PM10;ALL;OU;PMEAN;28*0.018*40*1*50*;Descr of: GC 56

Lines with "OU" as fourth parameter contain all information required to calculate the value of the observation uncertainty used to derive the model quality objectives. The numbers separated by asterisks can be modified by the user to test alternative uncertainty estimates. By order, these numbers represent (see equation 12 for details):

- ku_r^{RV} (28 in our example) expressed in percentage
- α (0.018 in our example)
- Np and Nnp (40 and 1 in our example)
- RL the reference value (50 in our example)

Different experimental methodologies exist to measure PM, each characterized by a different level of uncertainty. The user can test the impact of switching between different uncertainty estimates, corresponding to values representative of the gravimetric (default reference), beta-ray and teom techniques. In the "goals_criteria_oc.dat" configuration file, the following lines are visible:

26;PM10g;ALL;OU;PMEAN;28*0.018*40*1*50
27;PM10t;ALL;OU;PMEAN;38*0.027*40*1*50
28;PM10b;ALL;OU;PMEAN;38*0.009*40*1*50

To switch among the different PM uncertainty estimates it is necessary to copy the number in between asterisks for the selected uncertainty estimate (PM10g for gravimetric, PM10t for TEOM and PM10b for beta-ray) and use them in the PM10 line used by DELTA.

5.2. Saving summary statistics information in ASCII

Delta saves by default all information contained in each diagram in ASCII format by generating a file named "dumpFile.txt" which can be found in the dump directory. This file will be overwritten at each new generated diagram

Frequently used statistical indicators (e.g. correlation, bias…) can be automatically created by selecting the "summary report & print" analysis diagram option. DELTA will then generate the summary report in the graphical window but also create an ASCII file in the dump directory using the selected model and species to create the name.

Note that both options will create information relative to the selected time period.

5.3. Mouse-driven recognize functionality

For most graphics a small additional window appears with the title “Info on data points (click!)”. This allows the user to click on the diagram and retrieve information about the quantitative values of the different points/stations represented. This feature can be switched on and off through the top menu in Delta Tool: click the item “Mode” and choose “Hide/Show Recognizer info”.

5.4. Managing multiple datasets: the “MyDeltaInput” option

As mentioned before there are three different types of input information:

- The startup.ini file located in the ./resource directory
- The XXXX_MODEL_TIME.cdf file located in the ./data/modeling directory
- The station.csv files located in the ./data/monitoring directory
-

When dealing with different statup.ini files, different sets of modelling results, and different sets of monitoring stations, it may be useful to be able to overwrite the defaults locations of these three inputs.

The file *MyDeltaInput.dat* in the resource directory contains three lines:

1 - First line contains the name of the startup.ini file in the ./resource directory
2 - Second line contains the location of the model data in the ./data/modeling directory
3 - Third line contains the location of the monitoring data in the ./data/monitoring directory

Example:
startupED2007.ini ; the startup.ini file
modelling_ED2007 ; subdirectory in ,/data/modelling/
monitoring_ED2007 ; subdirectory in ./data/monitoring/

The default (if the MyDeltaInput.dat file is not found) is:
startup.ini
modelling
monitoring

After completion of ‘Execute’ the name of the used startup.ini file, the modelling data location, and the monitoring data location are mentioned beneath the plot.

Note that DELTA can run with/wthout this new configuration input file.

6. Benchmarking mode

From the Delta Tool top menu select the item “Benchmarking” (this is only possible when the “Data Selection” window and the “Analysis” window are closed).
At present the automatic production of performance reports is available for the following pollutant concentrations and time frequencies:

- daily maximum 8h mean O3
- Daily averaged PM10
- Hourly NO2
- Yearly PM10
- Yearly NO2

Reports are produced similar to those presented in Section 5 of the "Concepts" part of this document.

Important:

Currently the performance report is produced automatically for one single model. This single model is selected by default and corresponds to the top-of-the-list model when opening the data-selection interface. For applying the procedure to other models the user is requested to play with the model data files in the ../ data/modeling directory and leave in this directory only the model on which the performance report should be produced.

7. Distributed Dataset: Po-Valley

This dataset contains the results from a model inter-comparison exercise performed by six air quality models for year 2005. The model domain covers the Po Valley (Italy) with at 6 x6 km2 resolution (95x65 cells) grid. Pollutant concentrations have been simulated by 5 transport chemical (CHIMERE, TCAM, CAMX, RCG, MINNI) and 2 meteorological models (MM5 and TRAMPER).

More details about the POMI exercise can be found at the POMI website http://aqm.jrc.ec.europa.eu/POMI/index.html. Observations from 63 monitoring sites located in the Po Valley are also provided. Sites have been classified in regions and station types (suburban, urban and rural).

8. Utility programs

8.1. Data-Check Integrity Tool

From the Delta Tool top menu select the item "Help" > " Data-Check Integrity Tool" (this is only possible when the "Data Selection" window and the "Analysis" window are closed).

This will start a tool, which checks the consistency among the modeling results file (NetCdf), the observation files (csv) and the main configuration file (startup.ini).

There are currently 18 steps included in this consistency check:

1) Checking existence of relevant directories
2) Checking existence of “startup.ini” file
3) Checking existence of appropriate sections within startup.ini
4) Checking correctness of “PARAMETERS” section within Startup.ini
5) Checking correctness of “MONITORING” section within Startup.ini
6) Checking for possible redundancy in station names in startup.ini
7) Checking consistency of the number of stations between startup.ini and obs files
8) Checking consistency of the station names between startup.ini and obs files
9) Checking consistency of the species names between startup.ini and obs files
10) Checking number of lines in obs files
11) Checking for extreme values in obs files
12) Checking for zero values (information check only)
13) Checking for existence of model file
14) Checking for correct attribute in model netCdf file
15) Checking correctness of time dimension in model file
16) Checking model extreme values
17) Checking consistency between species available in startup.ini and model file
18) Producing statistic report

Check_IO produces a log report, as well as a summary report with details concerning the various checks. The reports are located in the main directory where Delta Tool is installed.

8.2. CSV to NetCDF

This program available on the Delta web site allows to produce a model file in NetCdf format from files in csv format similar to the one described for monitoring data. This program works only for data produced with an hourly frequency.

8.3. Preproc-CDF

The Deltapreprocessor is an idl-based tool for the extraction of time series at observational locations from meteorological or air quality model output for use in the DELTA Tool. Input to the PreProcessor is the configuration file 'startup.ini' containing the variables (meteorological variables , and pollutants) to be treated, as well as geographical information about the observational stations. Model output should be in netCDF format with all the variables defined on longitude-latitude coordinates at ground level and hourly frequency. Three interpolation techniques are available for producing the modeled time series at the observational stations:

(i) NN (Nearest Neighbour) where the values at a station are taken from the nearest lon-lat grid point.
(ii) BIL (Bilinear) where a bilinear interpolation is performed on the grid cell in which the station is located; for this the gridcell is first transformed into a square using a bilinear mapping.
(iii) DW (Distance Weighted) where a weighted mean value is calculation in the station grid-cell. The weights are the inverse of the distance from the station to the 4 gridpoints.

Output of the PreProcessor is written to a netCDF file.

During the PreProcessing a number of checks are performed to guarantee the conformity with the DELTA Tool conventions.

The DeltaPreProcessor is available as an idl-executable (sav fle) and runs under the IDL-Virtual Machine in a Windows environment.

Part III

DIAGRAMS Overview

In this Annex all diagrams/elaborations available in DELTA are detailed according to the following template:

TEMPLATE: Diagram name (Elaboration name)	*Elaboration numbers (internal use)*	
DIAGRAM example	**X axis**	
	Y axis	
	Parameters	Possible choice
	Time Avg	Possible options in the DELTA menu
	Daily Stats	
	Season	
	Day	
	Threshold	Required or not

Description	Brief description of diagram
MQO	If Model quality objective and/or model performance criteria are available for the diagram/elaboration a description of the criteria used is provided here. The list of parameters together with specific requirements (time averaging…) is also provided. If groups are allowed to be selected, this will as well be mentioned.

Options	**O**BS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
	Possible options in terms of multiple choices. A cross in OBS means that more than one station can be selected (similar for MOD, PAR and SCEN). If other options are available these will be mentioned under the "other" column. Foe example, O-M means that more than one model and more than one station can be selected at the same time.						Can single stations be selected?	Can station groups be selected?

BARPLOT (Mean, Stddev, Exc. Days)	*0,1,9*

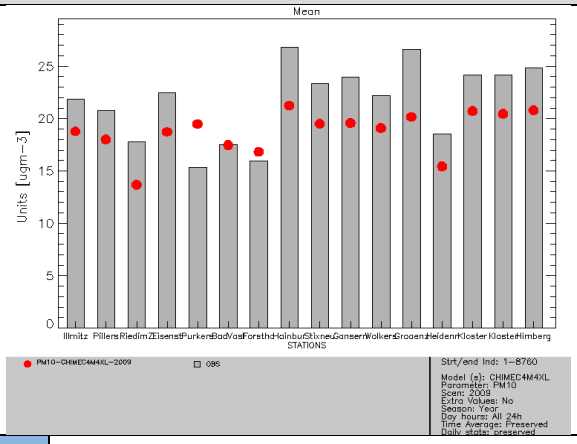

X axis	Stations
Y axis	Value
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	Limit Value for Exc. days

Description

Bar-plots with observed values represented with grey filled bars. Modeled values are indicated with colored circles. In case of multiple choices involving three entities (e.g. models, observations and parameters), multiple bars will appear.

MQO

N\A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X	X	P-O P-M P-S M-S M-O S-O P-M-O P-S-O M-S-O		YES	YES

BARPLOT (Spatial Correlation)	*14*

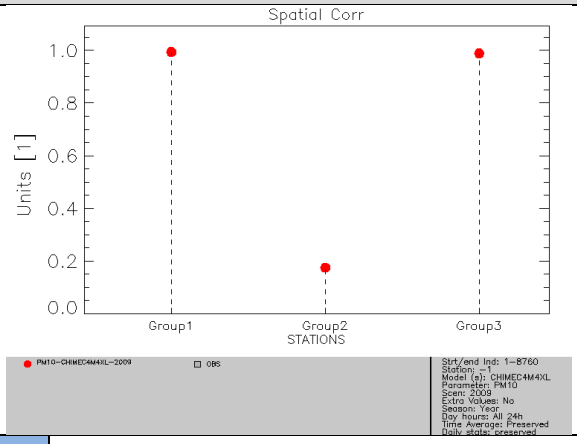

X axis	Station Groups
Y axis	Value
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N\A

Description

For all stations included in a selected group (Note that this diagram only works with groups!) a time average value is calculated for the time period selected. All observed and modeled values within a given group are then correlated to each other to provide a single value per selected group of stations.

MQO

N\A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X	X	P-O M-O		NO	YES

BARPLOT (R, Mbias, RMSE, IOA, RDE, NMB, RPE, FAC2, NMSD)	*2, 3, 4, 7, 8, 23, 30, 33, 54*

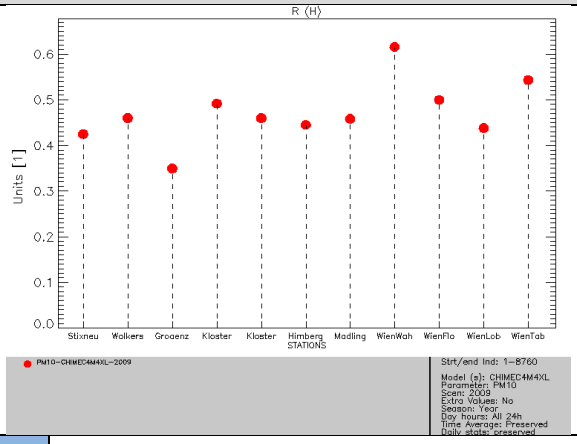

X axis	Stations
Y axis	Values
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N|A

Description

For all stations the selected characteristic is plotted as a colored circle. In case of multiple choice involving two entities (e.g. models and observations) two colored circles will appear while for multiple choice involving three entities (e.g. models, parameters and observations) multiple bars will appear.

MQO

N|A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X	X	P-O P-M P-S M-S M-O S-O P-M-O P-S-O M-S-O		YES	YES

BARPLOT (CUMUL)

38

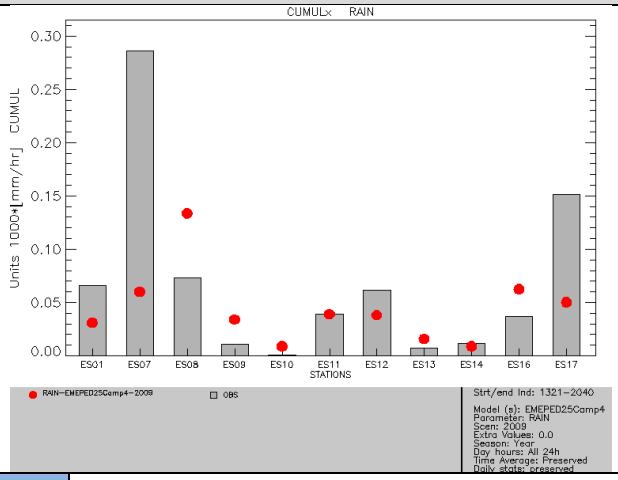

X axis	Stations
Y axis	Values
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	Offset value

Description

For all stations the cumulative total of the selected variable is plotted. This option is useful for deposition variables like rain or deposited pollutants. The total is the sum of the hourly values over the selected period of time, In case of multiple choice involving two entities (e.g. models and observations) two colored circles will appear while for multiple choice involving three entities (e.g. models, parameters and observations) multiple bars will appear.
Take offset value equal to 0.
Example gives quantity of rain at some Spanish stations in 1000*mm/m2 over the period 25/02/2009 – 26/03/2009

MQO

N|A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X	X	P-O P-M P-S M-S M-O S-O P-M-O P-S-O M-S-O		YES	YES

SCATTER (Mean mod vs. mean obs)	*6*

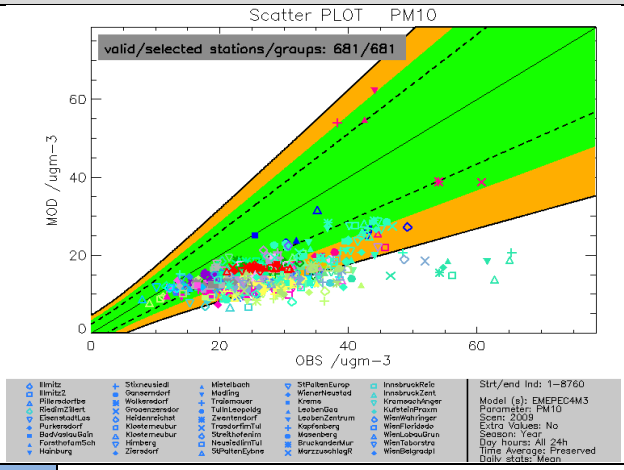

X axis	Mean Observations
Y axis	Mean Model values
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N/A

Description

The scatter diagram plots mean modeled values against mean measurements. If only one model, one parameter and one scenario selected, different symbols and colors are used to represent the different stations. Otherwise dots are used for each station (or group of stations) with colors depending on scenario, model or parameter (see example).

MQO

Dashed and solid lines indicate NMB/2RMS$_U$ ratios of 0.5 and 1, respectively. The orange region (only for hourly/daily) delimited by ratio sqrt(0.5)=0.71 (see equations (**Error! Reference source not found.**) to (**Error! Reference source not found.**))

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
PM10	preserve	Mean	Free	N/A	NO
PM25	preserve	Mean	Free	N/A	NO
O3	8H	Max	Free	N/A	NO
NO2	preserve	preserve	Free	Free	NO
WS	Preserve	Preserve	Free	Free	NO
TEMP	Preserve	Preserve	Free	Free	NO

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X	X	O-M O-P		YES	YES

SCATTER (One station – All time values)

13

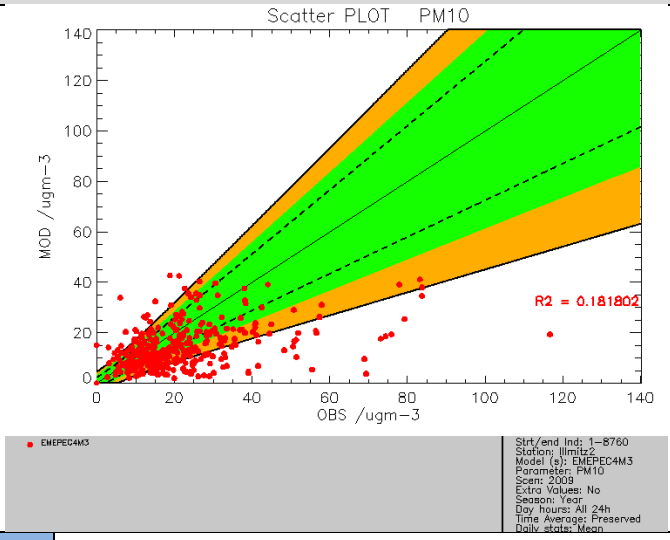

X axis	Observations
Y axis	Model values
Parameters	FREE
Time Avg	N/A
Daily Stats	N/A
Season	FREE
Day	N/A
Threshold	N/A

Description

The scatter diagram plots all time modeled values against measurements for one single station/group selected. If a group is selected, the average of all station values at each time are averaged and plotted against the corresponding modeled value.

MQO

Dashed and solid lines indicate NMB/2RMS$_U$ ratios of 0.5 and 1, respectively. The orange region (only for hourly/daily) delimited by ratio sqrt(0.5)=0.71 (see equations (**Error! Reference source not found.**) to (**Error! Reference source not found.**))

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
PM10	preserve	Mean	Free	N/A	NO
PM25	preserve	Mean	Free	N/A	NO
O3	8H	Max	Free	N/A	NO
NO2	preserve	preserve	Free	Free	NO
WS	Preserve	Preserve	Free	Free	NO
TEMP	Preserve	Preserve	Free	Free	NO

Options

OBS	**M**OD	**PA**R	**S**CEN	Other		Single mode	Group Mode
X	X	X	X	O-M O-P		YES	NO

TIME SERIES	*12*

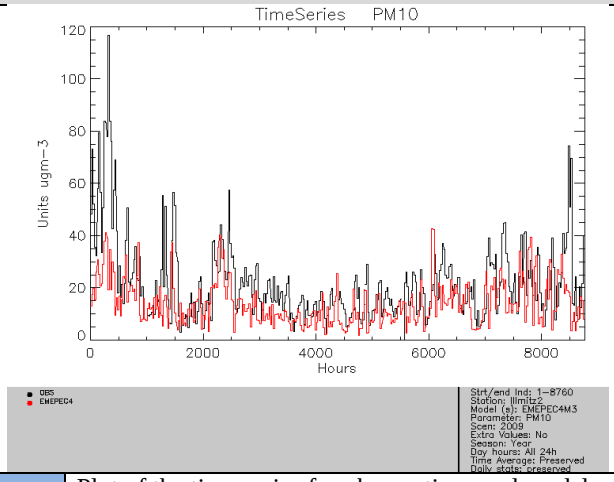

X axis	Time
Y axis	Values
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N\A

Description

Plot of the time series for observations and model results at 1 station for 1 or more models and scenarios. The 75% minimum coverage of the data is not taken into account here, all values are plotted.

MQO

N/A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single Mode	Group mode
	X		X			YES	NO

TARGET (8H Max, Daily, Hourly)

21,52,81

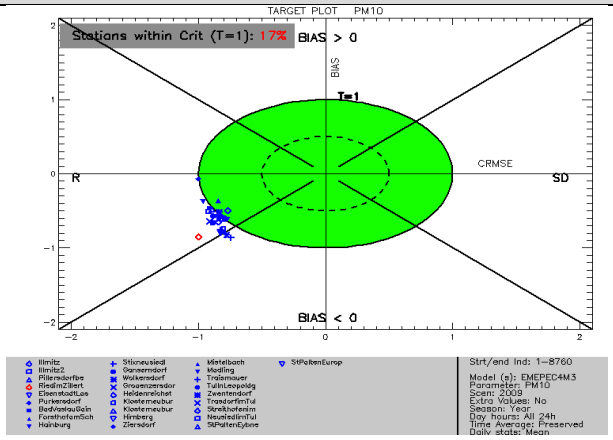

X axis	CRMSE / $2RMS_U$
Y axis	BIAS / $2RMS_U$
Parameters	NO2, O3, PM10
Time Avg	See MQO below
Daily Stats	
Season	
Day	
Threshold	N/A

Description

The Target diagram plots for each station the normalized CRMSE against the normalized BIAS. The distance from the origin represents the normalized RMSE. The screen is divided into four areas distinguishing the main source of error type for each station (Negative and positive bias, correlation (R), and standard deviation (SD). Different symbols and colors are used to represent the different stations.
The CRMSE related error is examined to see whether it is dominated by R or by SD. The following ratio is used to assign a given station either to the left or right side of the target diagram (see METHOD2012 for more details)

$$\frac{(\sigma_M - \sigma_O)}{\sqrt{2\sigma_M\sigma_O(1-R)}} \begin{cases} >1 \rightarrow \text{SD dominates on R (right)} \\ <1 \rightarrow \text{R dominates on SD (left)} \end{cases}$$

MQO

Dashed and solid lines indicate RMSE/$2RMS_U$ ratios of 0.5 and 1, respectively. The number of stations fulfilling RMSE/$2RMS_U$ < 1 is indicated in the upper left part of the diagram and should be larger than 90%. The Target diagram is only available with associated MQO (see below). This diagram is not available for yearly average values. More details can be found in Section 5.1.

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
O3	8H	Max	Free	N/A	90%
NO2	Preserve	Preserve	Free	Free	90%
PM10	Preserve	Mean	Free	N/A	90%
PM25	Preserve	Mean	Free	N/A	90%
WS	Preserve	Preserve	Free	Free	90%
TEMP	Preserve	Preserve	Free	Free	90%

Opt ions	OBS	MOD	PAR	SCEN	Other		Single Mode	Group mode

	X	X			O-M		Yes	Only 90% option

SUMMARY REPORT (8H Max, Daily, Hourly)	*31,83,84*

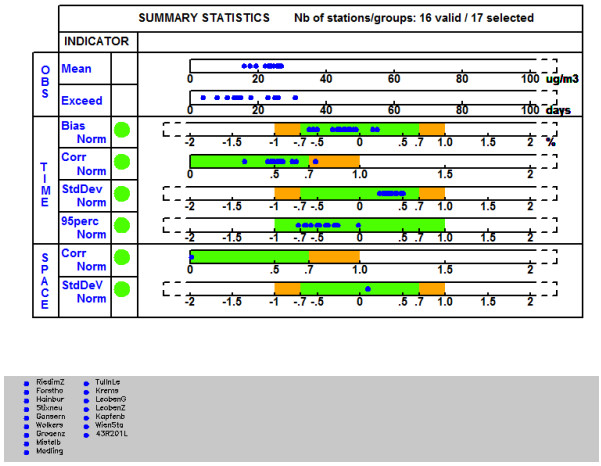

X axis	N/A
Y axis	N/A
Parameters	O3, PM10,NO2
Time Avg	See MQO below
Daily Stats	
Season	
Day	
Threshold	Used for exceedance calculation

Description

The summary report is available for both hourly and yearly frequency (in this case a simplified version is produced). All details can be found in Section 5.1and 5.2

MQO

For details on how green and orange areas are defined, see Section 4.3.

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
O3	8H	Max	Free	N/A	NO
NO2	Preserve	Preserve	Free	Free	NO
PM10	Preserve	Mean	Free	N/A	NO
PM25	Preserve	Mean	Free	N/A	NO
WS	Preserve	Preserve	Free	Free	NO
TEMP	Preserve	Preserve	Free	Free	NO

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X						YES	NO

MPC correlation (8H Max, Daily, Hourly)	*15,16,78*

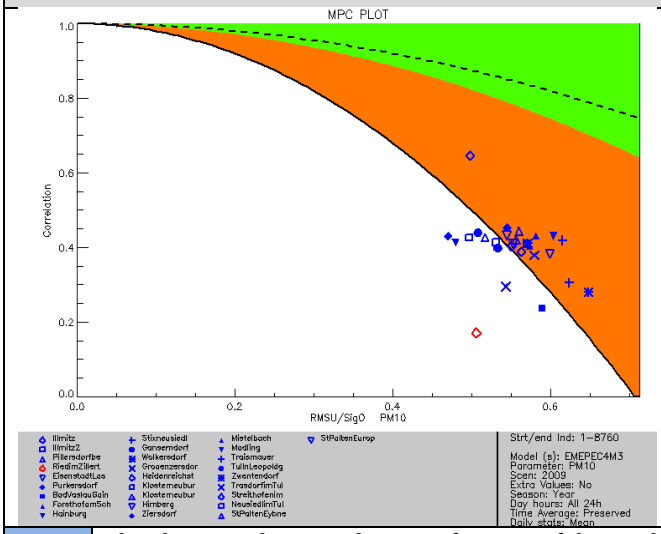

X axis	RMS_U/σ_O
Y axis	R
Parameters	O3, PM10, NO2
Time Avg	See MQO below
Daily Stats	
Season	
Day	
Threshold	N\A

Description

This diagram plots correlation as function of the quadratic mean of the uncertainty divided by the station observed standard deviation. It provides for each station (represented by a symbol) an indication of whether the time correlation fulfills a minimum level of quality (green/orange area)

MQO

For details on how green and orange areas are defined, see equations (**Error! Reference source not found.**) to (**Error! Reference source not found.**).

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
O3	8H	Max	Free	N/A	90%
NO2	Preserve	Preserve	Free	Free	90%
PM10	Preserve	Mean	Free	N/A	90%
PM25	Preserve	Mean	Free	N/A	90%
WS	Preserve	Preserve	Free	Free	90%
TEMP	Preserve	Preserve	Free	Free	90%

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X			M-O		YES	YES

MPC std. Dev. (8H Max, Daily, Hourly)	*25,32,79*

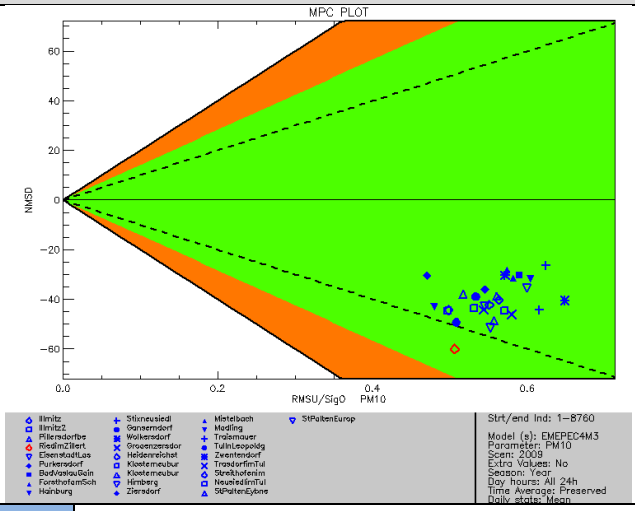

X axis	RMS_U/σ_O
Y axis	NMSD
Parameters	O3, PM10, NO2
Time Avg	See MQO below
Daily Stats	
Season	
Day	
Threshold	N\A

Description

This diagram plots NMSD as function of the quadratic mean of the uncertainty divided by the station observed standard deviation. It provides for each station (represented by a symbol) an indication of whether the normalized standard deviation (NMSD) fulfills a minimum level of quality.

MQO

For details on how green and orange areas are defined, see equations (**Error! Reference source not found.**) to (**Error! Reference source not found.**).

MQO are valid for the following parameters/ time statistic choices

Parameter	*Time Avg*	*Daily Stats*	*Season*	*Day*	*Group*
O3	8H	Max	Free	N/A	90%
NO2	Preserve	Preserve	Free	N/A	90%
PM10	Preserve	Mean	Free	Free	90%
PM25	Preserve	Mean	Free	Free	90%
WS	Preserve	Preserve	Free	Free	90%
TEMP	Preserve	Preserve	Free	Free	90%

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X			M-O		YES	YES

Taylor	*19*

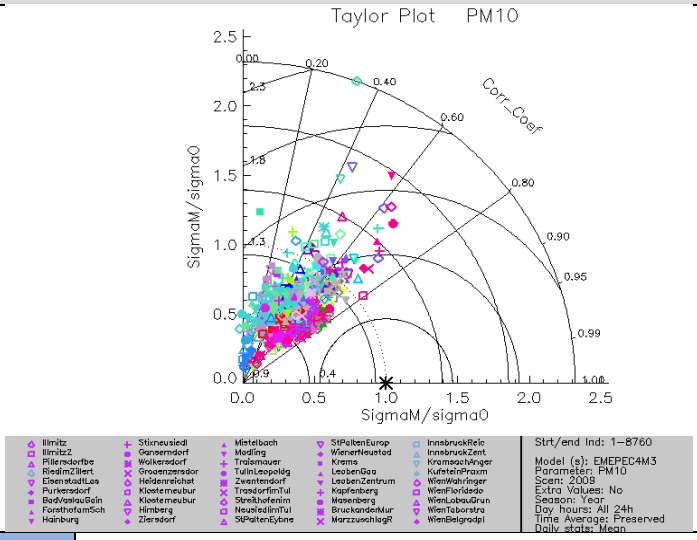

X axis	σ_M/σ_O
Y axis	σ_M/σ_O
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N\A

Description

The Taylor diagram provides for each station an indication on Correlation (angular distance), standard deviation (model standard deviation larger than observed one when the station symbol lies beyond the dashed line) and CRMSE (distance between the station symbol and the black asterisk on the X axis.

MQO

N/A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X		P-O M-O		YES	YES

Q-Q plot (One station All values)	*29*

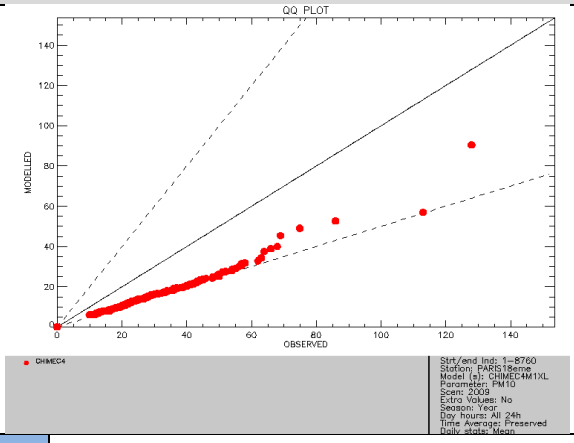

X axis	Observed
Y axis	Modelled
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N/A

Description	Same as scatter but both observed and modeled values are independently sorted.
MQO	N\A

Options	**O**BS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
		X	X				YES	NO

Dynamic evaluation (Day-Night)	*71*

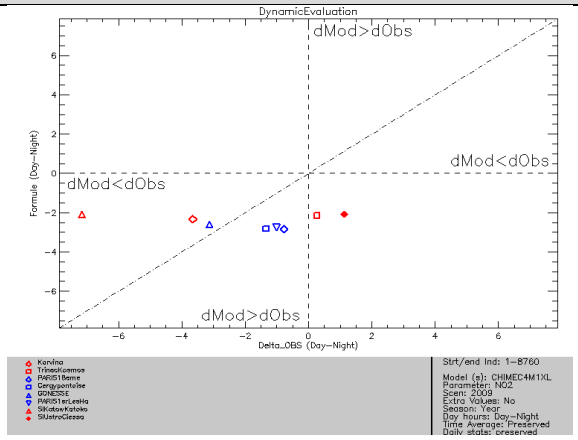

X axis	Observed day/ night difference
Y axis	Modeled day/ night difference
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N/A

Description

Scatter plots of modeled vs. observed day-night mean differences. Well behaving results should lie along the 1 to 1 line. Lower right and upper left part of the graphs indicate poor results.

MQO

N\A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X				YES	YES

Dynamic evaluation (Summer-Winter)	*72*

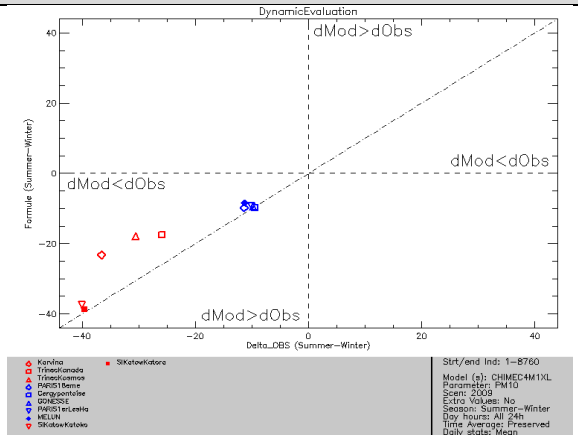

X axis	Observed day/ night difference
Y axis	Modeled day/ night difference
Parameters	FREE
Time Avg.	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	FREE

Description

Scatter plots of modeled vs. observed day-night mean differences. Well behaving results should lie along the 1 to 1 line. Lower right and upper left part of the graphs indicate poor results.

MQO

N/A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X				YES	YES

Dynamic evaluation (Weekdays – Weekends)	*73*

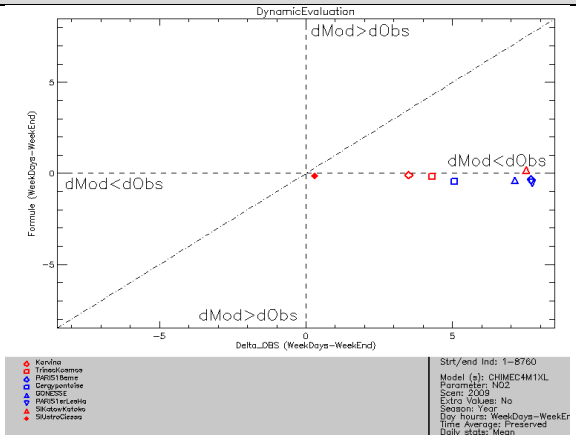

X axis	Observed weekdays/ week-end difference
Y axis	Modeled weekdays/ week-end difference
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	N\A

Description

Scatter plots of modeled vs. observed day-night mean differences. Well behaving results should lie along the 1 to 1 line. Lower right and upper left part of the graphs indicate poor results.

MQO

N/A

Options

OBS	**M**OD	**P**AR	**S**CEN	Other		Single mode	Group mode
X	X	X				YES	YES

GeoMap (Target)	*35,36,37*

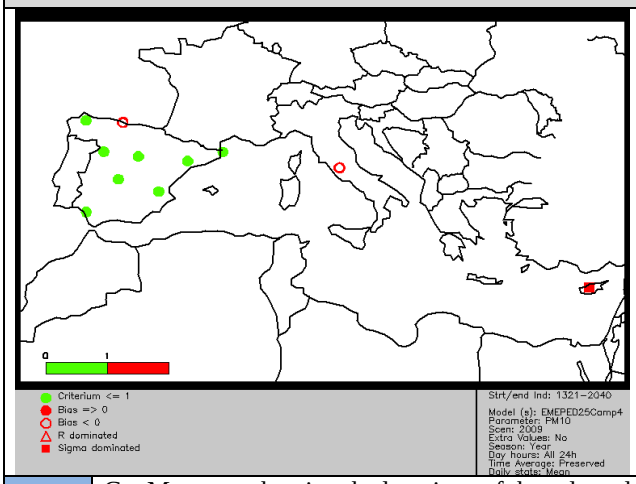

X axis	N\A
Y axis	N\A
Parameters	O3, NO2, PM10
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	

Description	GeoMap map showing the locations of the selected stations, together with the Target value for O3 (8hr mean), hourly NO2, daily PM10, hourly WS and TEMP. Colors indicate whether or not the uncertainty criterium is satisfied yes or no; and if not satisfied the location in the target (Bias >0, Bias <0, Correlation dominated or NMSD dominated
MQO	For details, see Section 4.2.

Options	**O**BS	**M**OD	**P**AR	**S**CEN	Other		Single Mode	Group mode
		X	X				YES	NO

Google Earth (Mean, Exc. Days, Bias, NMB, Std. Dev, R, RMSE, RDE, σM/σO, NMSD)	*58,59,60,61,62, 63, 64,67,68,69*

X axis	N\A
Y axis	N\A
Parameters	FREE
Time Avg	FREE
Daily Stats	FREE
Season	FREE
Day	FREE
Threshold	See explanations in Analysis window

Description	Google Earth map showing the locations of the selected stations, as well as all requested observational and model results in pop-up windows. The location of the GE application must be inserted in the init.ini file in the resource directory
MQO	

Options	**O**BS	**M**OD	**P**AR	**S**CEN	Other		Single Mode	Group mode
	X	X	X	X			YES	NO

Part IV

Annexes

1. A simplified formulation for the uncertainty

The uncertainty formulations ($U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14), $RMS_U = ku_r^{RV}\sqrt{(1-\alpha)(\overline{O}^2 + \sigma_0^2) + \alpha * RV^2}$ (Eq. 15) $U(\overline{O}) = ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p^*}\left(\overline{O}^2 + \sigma_o^2\right) + \frac{\alpha * RV^2}{N_{np}}} \cong ku_r^{RV}\sqrt{\frac{(1-\alpha)}{N_p}\overline{O}^2 + \frac{\alpha * RV^2}{N_{np}}}$ (Eq. 16) and the accompanying Table 5: List of the parameters used to calculate the uncertainty (see formulas (12) and (13)) can be substituted by a simpler approach to facilitate the communication to the public and/or policy makers. This relation relies on the following steps: (1) fix/define the measurement uncertainty at low values (around zero) and at the reference value (the limit value if existing); (2) linearly interpolate the range in between and linearly extrapolate outside this range. The expression of the simplified uncertainty (Us) is therefore given by:

$$U_s(O) = U_l + \frac{O}{RV} * \left(U_{RV} - U_l\right)$$

In the following we define these two uncertainties (U_{RV} and U_l) based on the result of a fitting process with the exact values obtained from equation ($U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14). As the fitting is not optimum over an infinite range of values, the range of applicability is provided in this table as well.

The following values have been used:

	Range of applicability	RV	U_l	U_{RV}
NO2 yearly	0 – 80 ug/m3	40	3 ug/m3	6 ug/m3 (15%)
PM10 yearly	0 – 60 ug/m3	40	1.7 ug/m3	2.8 ug/m3 (7%)
PM25 yearly	0 – 40 ug/m3	25	2 ug/m3	2.5 ug/m3 (10%)
O3 8h day max	0 – 250 ug/m3	120	12 ug/m3	15.6 ug/m3 (13%)
NO2 hourly	0 – 250 ug/m3	200	6 ug/m3	48 ug/m3 (24%)
PM25 daily	0 – 60 ug/m3	25	1 ug/m3	9 ug/m3 (36%)
PM10 daily	0 – 200 ug/m3	50	1 ug/m3	14 ug/m3 (28%)
WS hourly	0 -30 m/s	5	1 m/s	1.5 m/s (30%)
TEMP hourly	All	25	2 C	2 C (8%)

Note that this simplified formulation is intended for communicatoion to public /stakeholders only while the original formulation ($U(O) = ku_r^{RV}\sqrt{(1-\alpha)O + \alpha * RV^2}$ (Eq. 14) should keep being used for regulatory purposes.

2. What's new

This section details the main changes made between DELTA versions:

3.1. From version 3.4 to version 4.0

- Inclusion of a new diagram "geomap" for hourly/daily model results.
- Addition of new MQO for PM2.5, WS and TEMP. Parameters for the PM2.5 MQO have been revised to avoid uncertainties smaller than PM10 in the lower concentrations range.
- Update of uncertainty parameters for NO2 and PM10 (yearly and hourly)
- Inclusion of the myDeltaInput option to facilitate the management of multiple datasets. Note that DELTA can run in absence of this new input file.
- Inclusion of MQO for SO4, NH4, NO3, EC and TOM for testing purposes. Uncertainty parameters are available in the "goalscriteria_oc.dat" configuration file.
- Correction of geomap SD and R error symbol types: switch to be consistent with Target.
- Correction of the counting of valid station in the yearly scatter diagram
- Modifications of the hourly/daily summary report: the RDE indicator has been suppressed and substituted by a threshold indicator
- Modification of the yearly summary report: RDE has been dropped.
- Correction of Target diagram: SD and R related errors were assigned the wrong side of the diagram (left vs. right)
- Uncertainty values for PM10 TEOM and beta-ray measurement techniques have been included in the "goalsandcriteria_oc" configuration file. See here for more details.
- Addition of a "save main statistical indices" option. This option runs automatically when the summary report diagram is selected. See here for more details.
- Correction: The generation of performance reports in pdf format did not work properly in version 3.6.
- Review and update of the forecast Target indicator.
- The MQO for 3h average NO2 has been removed