



TISCHLER UND SOHN

Tischler und Sohn (U.S.A.) Limited

Six Suburban Avenue
Stamford, CT 06901 USA

Tel.: (203) 674-0600


Fax: (203) 674-0601

e-mail: info@tischlerwindows.com

Website: www.tischlerwindows.com

Tischler Glass Type #32

Dade County Insulated Solar Control
SGG XTREME 70_33 II

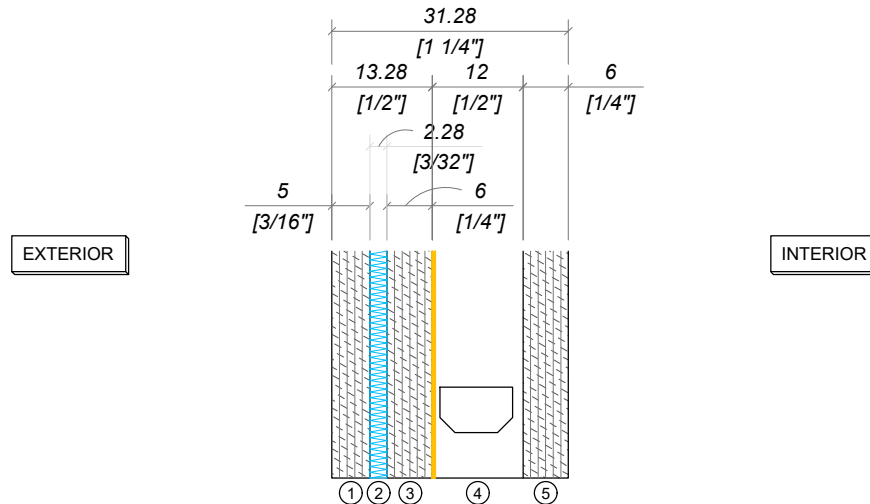

Glazing From External To Internal:

Pane 1

- | | | |
|---|----------------------------|---|
| ① | 5 mm (3/16") | Clear Heat Strengthened Glass |
| ② | 2.28 mm interlayer (0.09") | Saflex RB (2.28mm) or Saflex VS02 (1.9mm) |
| ③ | 6 mm (1/4") | Clear Heat Strengthened Glass with Solar Control Coating
SGG XTREME 70_33 II |

Spacer

- | | | |
|---|--------------|-----------------------------|
| ④ | 12 mm (1/2") | Air Space, 90% Argon Filled |
|---|--------------|-----------------------------|

Pane 2

- | | | |
|---|-------------|----------------------------------|
| ⑤ | 6 mm (1/4") | Clear Annealed or Tempered Glass |
|---|-------------|----------------------------------|

Results:

Visible Light (NFRC 100-2010)

Daylight Transmittance $T_V = 68\%$

Thermal Properties (NFRC 100-2010)

U-Value = 0.23

R-value = 4.37

Solar Energy (NFRC 100-2010)

Shading Coefficient [g/0.87] = 0.34

SHGC = 0.30

Sound Reduction

STC = 40