



TISCHLER UND SOHN

Tischler und Sohn (U.S.A.) Limited

Six Suburban Avenue
Stamford, CT 06901 USA

Tel.: (203) 674-0600

Fax: (203) 674-0601


e-mail: info@tischlerwindows.com

Website: www.tischlerwindows.com

Tischler Glass Type #8

BR2 - Bullet Resistant (C1) - S

Low-E / Low-Iron

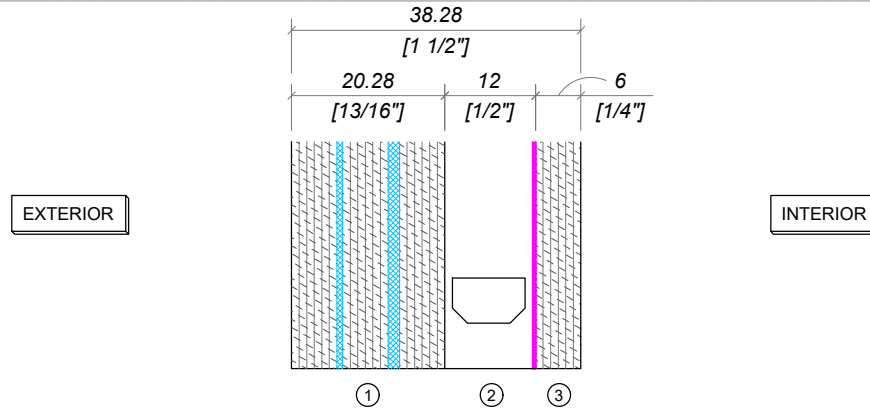

Glazing From External To Internal:

Pane 1

- ① 6 mm (1/4") Low Iron Annealed
- 0.76 mm (0.03") PVB Interlayer
- 6 mm (1/4") Low Iron Annealed
- 1.52 mm (0.06") PVB Interlayer
- 6 mm (1/4") Low Iron Annealed

Spacer

- ② 12 mm (9/16") Air Space, 90% Argon Filled

Pane 2

- ③ 6 mm (1/4") Low Iron Annealed or Tempered Glass with Low-E Coating

Results:

Visible Light (NFRC 100-2010)

Daylight Transmittance $T_v = 81\%$

Thermal Properties (NFRC 100-2010)

U-Value = 0.23

R-value = 4.37

Solar Energy (NFRC 100-2010)

Shading Coefficient [g/0.87] = 0.66

SHGC = 0.57

Sound Reduction

STC = 45