


GASTROINTESTINAL VIDEOSCOPE

# **GIF-XP170N**

5.4 mm ultra-slim endoscope achieves both great insertability and high image quality at the same time

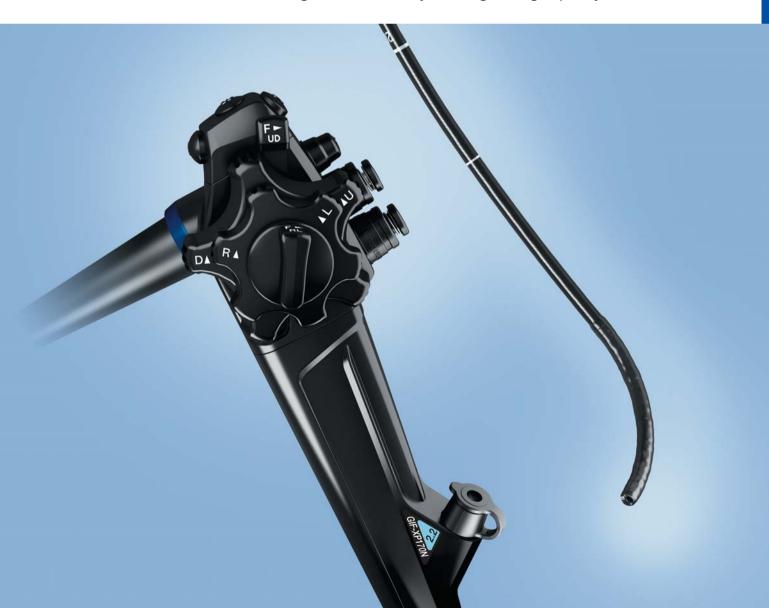

# **OLYMPUS GIF-XP170N**



#### **Main Features**

#### Ultra-slim Design

A marvel of compact design, the 5.4 mm outer diameter of the distal tip improves insertability, resulting in reduced patient discomfort and enhanced operator comfort.

### Advanced Image Clarity

Two light guides provide amplified brightness to support accurate depiction of mucosal structures.





#### Advanced Suction Capability

The larger 2.2 mm instrument channel enables the use of a wide range of endotherapy accessories and increases suction capability.

### Waterproof Connector

The newly designed connector is fully submersible and therefore eliminates the need for a water-resistant cap, while minimizing the risk of damage due to accidental immersion.

## Wide View Angle

The field of view has been increased to 140 degrees, now delivering the same field of view as routine upper GI scopes.



#### **Specifications**

Optical System	Field of view	140°
	Direction of view	Forward viewing
	Depth of field	3-100 mm
Insertion Section	Distal end outer diameter	5.4 mm
	Distal end enlarged	
	Air/Water Nozzle Up	Light-guide Lens
	Right Objective Lens	Left Instrument Channel Outlet
	Down	
	Insertion tube outer diameter 5.8 mm	
	Working length	1100 mm

Channel inner diameter 2.2 mm  Minimum visible distance 2.0 mm from the distal end  Direction from which endotherapy accessories enter and exit the endoscopic image  High-frequency Cauterization treatment Available  Bending Section Angulation range Up 210°  Down 90°  Right 100°  Left 100°  Total Length 1420 mm			
Instrument Channel  Direction from which endotherapy accessories enter and exit the endoscopic image  High-frequency  Cauterization treatment  Available  Up 210°  Down 90°  Right 100°  Left 100°	Instrument Channel	Channel inner diameter	2.2 mm
High-frequency  Cauterization treatment  Available  Up 210°  Down 90°  Right 100°  Left 100°		Minimum visible distance	2.0 mm from the distal end
Up 210°		endotherapy accessories enter and exit the endoscopi	ic
Bending Section Angulation range Down 90° Right 100° Left 100°	High-frequency	Cauterization treatment	Available
Bending Section Angulation range Right 100°  Left 100°	Bending Section	Angulation range	Up 210°
Right 100°  Left 100°			Down 90°
			Right 100°
Total Length 1420 mm			Left 100°
	Total Length	1420 mm	

Specifications, design and accessories are subject to change without any notice or obligation on the part of the manufacturer.

