METALOR®

Au Ag

Data Sheet

Alloy code:	10068	**Colour:**	Red
General Description:	9ct red gold alloy, for universal use. It can easily be cupped, stamped, rolled, polished, drawn and machined.		

Other properties:



Density - g/cm³:	11,30	
Melting range:	940 - 975 °C	
Composition:	AU:37,50% AG:3,60%	
Pickling:	Hot 10% sulphuric acid	
Hardness - HV5:	100	*Annealed*

Casting data:




Flask Temp.	≈ 600 °C	
Casting Temp.	1040 - 1075 °C	
Cooling:	Air cooling	
Hardness - HV5:	100	*Post cast*

Recommended Solder:



Description:	Melting range:	Material code
9 Red Gold Solder MEDIUM	685°C-790°C	300022410

Available profiles:

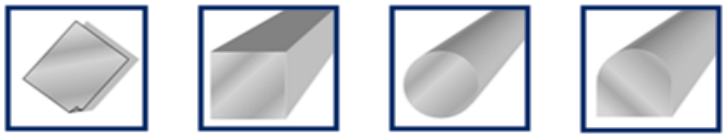

Sheet | Square Wire | Round Wire | D-Shape Wire

Disclaimer; Although we try to assure accuracy, Metalor cannot be responsible for typographical error on our data sheets.
Images & drawings are for illustrative purposes only and may not necessarily portray actual items sold.

Metalor Technologies (UK) Ltd - 74, Warstone Lane - GB-Birmingham B18 6NG
Phone: +44(0)121 262 3090 - Fax: +44(0)121 236 3568 - Email: watch.uk@metalor.com