BME688



BME688 Environmental Sensor 4-in-1

v1.0

2025-07-15 Rev. A

The sensor module for professional environmental monitoring


PRODUCT OVERVIEW

The BME688 Environmental Sensor 4-in-1 is an advanced, high-precision sensor module designed for professional environmental monitoring applications. Built around Bosch's industry-leading BME688 sensor, this module delivers exceptional accuracy and reliability for temperature, humidity, pressure, and gas detection in a single, compact form factor.

This professional-grade sensor module is engineered for demanding applications requiring precise environmental data collection. With its dual communication interfaces and ultra-low power consumption, it's ideal for battery-powered IoT devices, industrial monitoring systems, and research applications where accuracy and reliability are paramount.

PRODUCT VIEWS

TOP VIEW



Component placement and connectors

BOTTOM VIEW



Underside components and connections

KEY TECHNICAL SPECIFICATIONS

POWER SUPPLY

Power 1.71V to 3.6V Sensor Supply

supply: Voltage

Low power

sleep < 0.1 μ A, typical

consumption: operation $< 3 \mu A$

CONNECTIVITY

Interfaces: I²C (Qwiic) and SPI

Connector: Qwiic + Pin Headers

PIN CONFIGURATION

GROUP	AVAILABLE PINS	SUGGESTED USE
SPI	CSB, SDI (MOSI), SDO (MISO), SCK	High-speed SPI to read sensor data

COMMUNICATION INTERFACES

INTERFACE	SIGNALS / PINS	TYPICAL USE
UART	-	Unavailable
I ² C	SDA, SCL (CSB held high)	Default interface (Qwiic connector)
SPI	CSB = GND, SDI (MOSI), SCK, SDO (MISO)	High-speed alternative

TECHNICAL FEATURES

Temperature measurement

-40 to +85 °C, ±0.5 °C accuracy

Barometric pressure

300 to 1100 hPa, ±1 hPa accuracy

Dual interface

I2C (Qwiic) and SPI

Humidity measurement

0 to 100 % RH, ±3 % accuracy

VOC detection

Indoor Air Quality (IAQ) index

Compact form factor

Qwiic connector + standard through-hole pins

TYPICAL APPLICATIONS

Environmental Monitoring

Ideal for tracking air quality, humidity, temperature, and pressure in smart homes and industrial applications.

Smart Agriculture

Helps in monitoring soil and air conditions to optimize crop growth and yield.

IoT Devices

Can be integrated into IoT systems for realtime environmental data collection and analysis.

Wearable Devices

Can be used in health and fitness wearables to monitor


Weather Stations

Useful in DIY weather stations for accurate weather forecasting and monitoring.

VISUAL DOCUMENTATION

PRIMARY TECHNICAL DOCUMENTATION


MECHANICAL DIMENSIONS

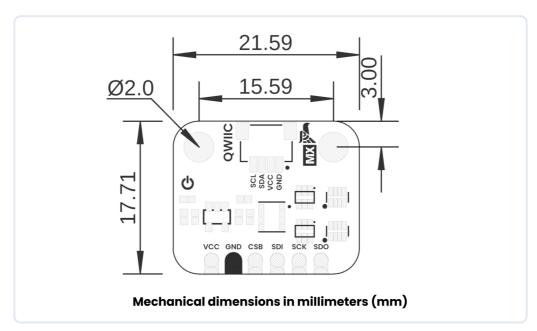

Physical dimensions and mounting specifications (measurements in millimeters)


SUPPLEMENTARY TECHNICAL DOCUMENTATION





Connection topology and system integration

CIRCUIT SCHEMATIC



Detailed circuit schematic diagram



USAGE

This module works with multiple platforms and toolchains:

- Arduino IDE (Adafruit BME680/BME688 library)
- PlatformIO (Arduino or Espressif frameworks)


DOWNLOADS

_

PIN CONFIGURATION & LAYOUT

Detailed pin assignment and connector layout

PINOUT

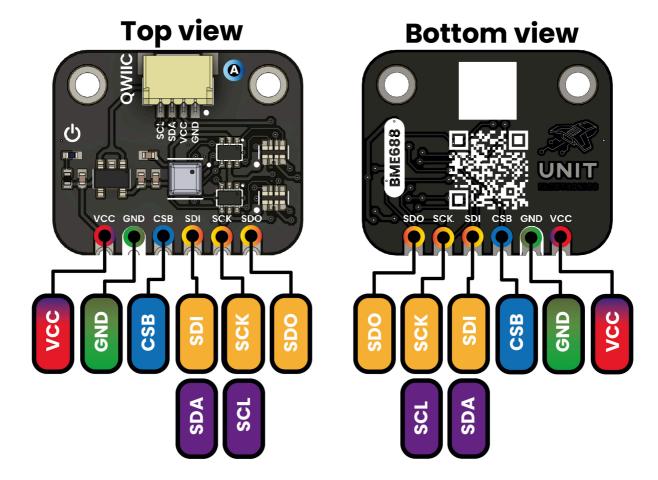

Description:



Complete pin configuration diagram showing all connectors, pin assignments, and electrical connections for proper integration

© 2025 UNIT Electronics México Technical document automatically generated BME688 v1.0 Professional Technical Datasheet Date: 2025-07-15
For commercial distribution