## Water Quality and Methane Emissions at Lake Waynoka

J. Beaulieu and S. Waldo

January 27, 2017

### 1. Background:

The US Environmental Protection Agency (USEPA) is conducting an investigation of methane ( $CH_4$ ) dynamics in reservoirs.  $CH_4$  is a potent greenhouse gas that is produced by microorganisms in reservoir sediments. The objective is to estimate the magnitude of  $CH_4$  emissions from reservoirs in the United States.

The USEPA measured CH<sub>4</sub> emissions from 32 reservoirs in Ohio, Indiana, and Kentucky during the summer of 2016. We designated a minimum of 15 sampling sites in each reservoir (depending on reservoir size), where we measured CH<sub>4</sub> emissions and several water quality indicators. CH<sub>4</sub> emissions were measured using a device which captures CH<sub>4</sub>-rich bubbles as they rise through the water column toward the atmosphere. A sonde was used to measure chlorophyll a, dissolved oxygen, pH, specific conductivity, water temperature, and turbidity just below the water surface at each of the 15 sites. Additionally, nutrient chemistry was analyzed at one shallow and one deep site for each reservoir.

This preliminary report presents results from the USEPA 2016 measurement campaign relevant to Lake Waynoka. These data will be included in a formal peer-reviewed publication to be submitted for publication in early 2018. This preliminary report includes:

- 1. This background information
- 2. A map showing the location of the sampled sites
- 3. A 3D map of the reservoir showing the measurement results for :
  - CH<sub>4</sub> emissions
  - Chlorophyll a
- 4. Figures showing how Lake Waynoka compared to the other 31 reservoirs in the study in terms of:
  - CH<sub>4</sub> emissions
  - Total phosphorus
  - Total nitrogen
  - Chlorophyll a
- 5. Tables summarizing the other measured water quality values at each site within Lake Waynoka

Thank you for your help in including Lake Waynoka in this project.

### 2. Map of Sampled Sites

We sampled Lake Waynoka on July  $26^{\rm th}$  -  $27^{\rm th}$  of 2016. The sampling sites were chosen using a generalized random tesselation stratified design ("GRTS"), an approach which combines elements of systematic and random survey designs which allows for the random allocation of sampling sites with maximum spatial coverage of the reservoir. We used a GPS and geographic information system (GIS) software to locate each sampling site (+/- 30 meters).

# Lake Waynoka Sample Sites

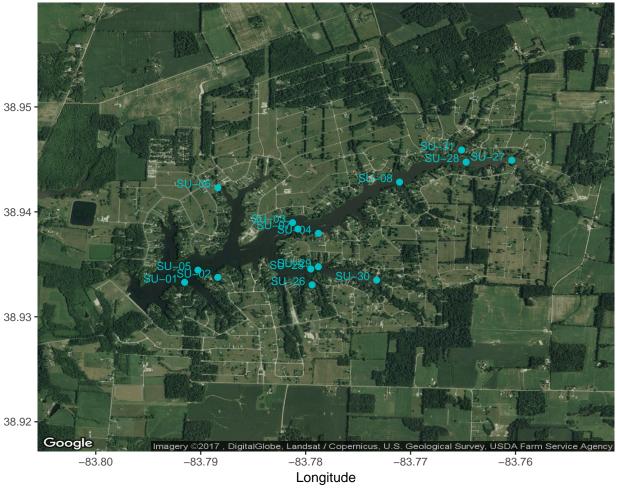


Figure 1: Location of the fifteen sample sites within Lake Waynoka. Satellite image from Google Maps.

### 3. Within-lake values of methane emissions and chlorophyll a concentrations

Previous studies have found a general pattern of higher CH<sub>4</sub> emissions in the river-reservoir transition (tributary) area, and lower emissions in the deeper downstream waters. This pattern was not observed at Lake Waynoka; with the exception of one "hot spot" on the southwest portion of the reservoir, similar CH<sub>4</sub> emissions were measured across the reservoir.

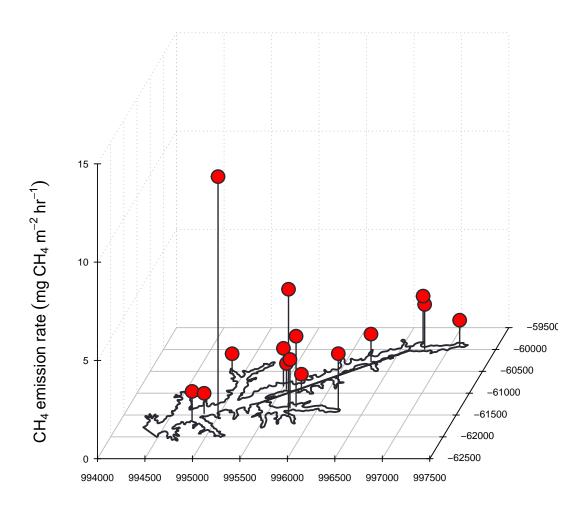


Figure 2: Methane emissions measured at the 15 sample sites within Lake Waynoka. The height of each "lollipop" corresponds to the emission rate shown on the vertical z-axis in units of milligrams  $CH_4$  per square meter of lake surface per hour.

However, chlorophyll a concentrations in Lake Waynoka did show a clear gradient from upstream (NE) to downstream (SW) sites.

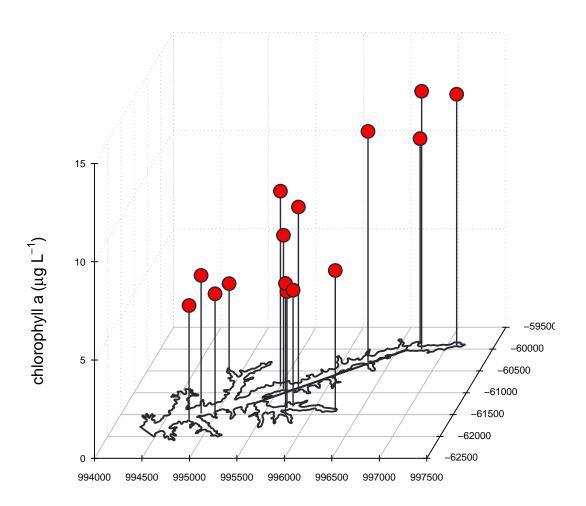


Figure 3: Chlorophyll a concentrations measured at the 15 sample sites within Lake Waynoka. The height of each "lollipop" corresponds to the concentration shown on the vertical z-axis in units of micrograms per liter of water.

### 4. Comparative plots

We used the results from the individual measurement sites to calculate mean values and an uncertainty range for the reservoir. The uncertainty measure we used is the 95% confidence interval (CI), which is similar to two standard deviations (sd) from the mean in a normally distributed data set (where 2\*sd = 95.45%). In the case of this study, the majority of the uncertainty is due to the spatial variability of a given parameter within the reservoir, rather than uncertainty due to analytical errors.

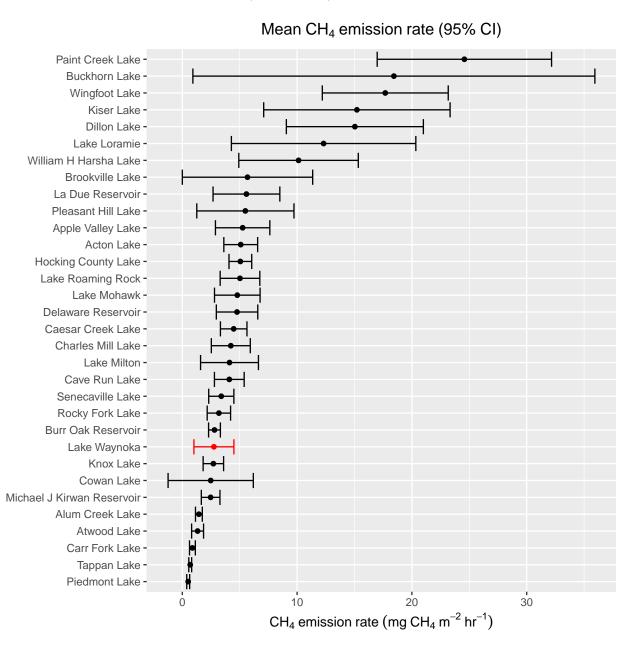


Figure 4: Mean and 95% confidence interval (CI) of the  $CH_4$  emission rate for each reservoir in this study, calculated from the vaules measured at >=15 sites within each reservoir.

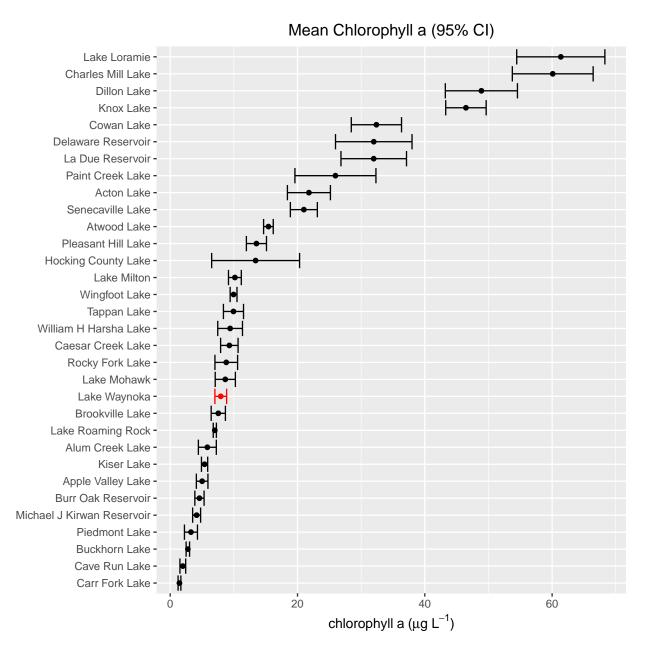


Figure 5: Mean and 95% confidence interval (CI) of the chlorophyll a concentration for each reservoir in this study, calculated from the vaules measured at >=15 sites within each reservoir.

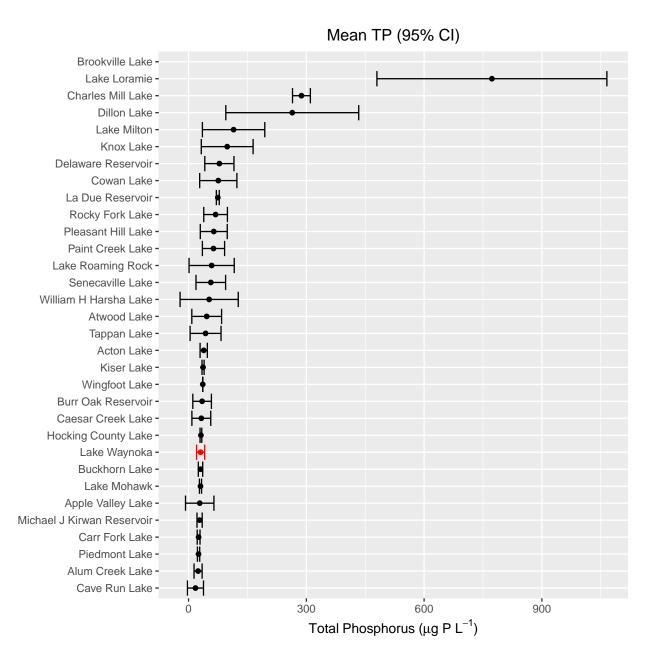


Figure 6: Mean and 95% confidence interval (CI) of the total phosphorus (TP) concentration for each reservoir in this study, calculated from the vaules measured at >=15 sites within each reservoir.

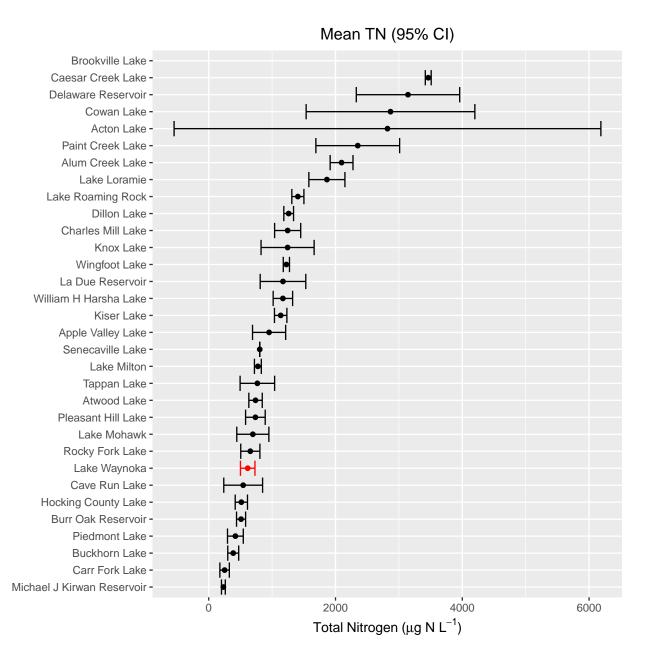


Figure 7: Mean and 95% confidence interval (CI) of the total nitrogen (TN) concentration for each reservoir in this study, calculated from the vaules measured at >=15 sites within each reservoir.

# 5. Tables of measured values at each site

Table 1: Surface (0.1 m) water quality parameters measured via sonde at each site. "Site Depth" is the measure of how deep the lake was at each site.

Site ID	Latitude	Site ID Latitude Longitude	Site Depth (m)	$\mathrm{Chl}\;\mathrm{a}\;(\mathrm{ug/L})$	DO~(mg/L)	$_{ m Hd}$	Sp. Cond	Water Temp (C)	Turbidity
SU-01	38.93323	83.79152	4.3	5.8	7.8	8.0	217	29.6	3.8
SU-02	38.93370	83.78849	1.4	6.2	8.0	8.2	216	29.8	4.2
SU-03	38.93905	83.78126	4.8	6.6	9.1	8.5	215	30.3	5.4
SU-04	38.93798	83.77870	1.5	9.3	9.1	8.4	216	30.2	0.9
SU-05	38.93449	83.79006	9.1	7.0	8.2	8.2	217	29.9	4.0
$90$ - $\Omega$ S	38.94232	83.78835	1.2	4.5	9.7	8.2	218	30.3	6.2
SU-07	38.93832	83.78070	6.2	7.8	9.1	8.5	216	30.6	5.5
SU-08	38.94286	83.77093	2.7	11.7	6.6	8.7	215	30.8	0.6
SU-25	38.95683	83.77946	3.6	5.9	8.7	8.5	221	31.9	5.6
SU-26	38.93308	83.77936	1.5	6.7	8.3	8.4	221	30.5	7.1
SU-27	38.94500	83.76034	0.0	12.8	8.3	8.5	223	31.5	16.0
SU-28	38.94610	83.76480	1.2	13.1	0.6	8.6	218	31.3	13.1
SU-29	38.93478	83.77877	2.4	5.9	0.6	8.5	222	31.7	6.5
SU-30	38.93351	83.77319	0.0	7.1	8.1	8.4	228	31.8	13.3
SU-31	38.94591	83.76527	6.0	10.4	9.4	8.6	218	31.6	11.7

Table 2: Surface (0.1 m) water chemistry parameters measured at one shallow and one deep site. "Site Depth" is the measure of how deep the lake was at each site.

Site ID	Site ID Latitude	Longitude	Site Depth (m)	NH4 (ugN/L)	NO2.3 (ugN/L)	Total N $(ugN/L)$	Reactive P (ug/L)	Total P (ugP/L)
SU-30	38.93351	83.77319	6.0	13	46	723	24	40
SU-01	38.93323	83.79152	4.3	11	44	575	22	27

### 6. EPA disclaimer

The U.S. Environmental Protection Agency, through its Office of Research and Development, participated in the research described herein. It has been subjected to the Agency's administrative review and has been approved for limited external distribution. Any opinions expressed in this article are those of the authors and do not necessarily reflect the views of the Agency, therefore, no official endorsement should be inferred. Any mention of trade names or commercial products does not constitute endorsement or recommendation for use.