
ZYNQ-7020 · A FULLY HARDWARE VIDEO NODE

ONE FRAME.
TWO TRUTHS.

Original and processed pixels leave one frame buffer in the same clock; the seam compares content, not screenshots. The node reports what it did on the wire at 1 Hz.

SAME 512×300 FRAME / SOBEL / 0° / NO ROTATION

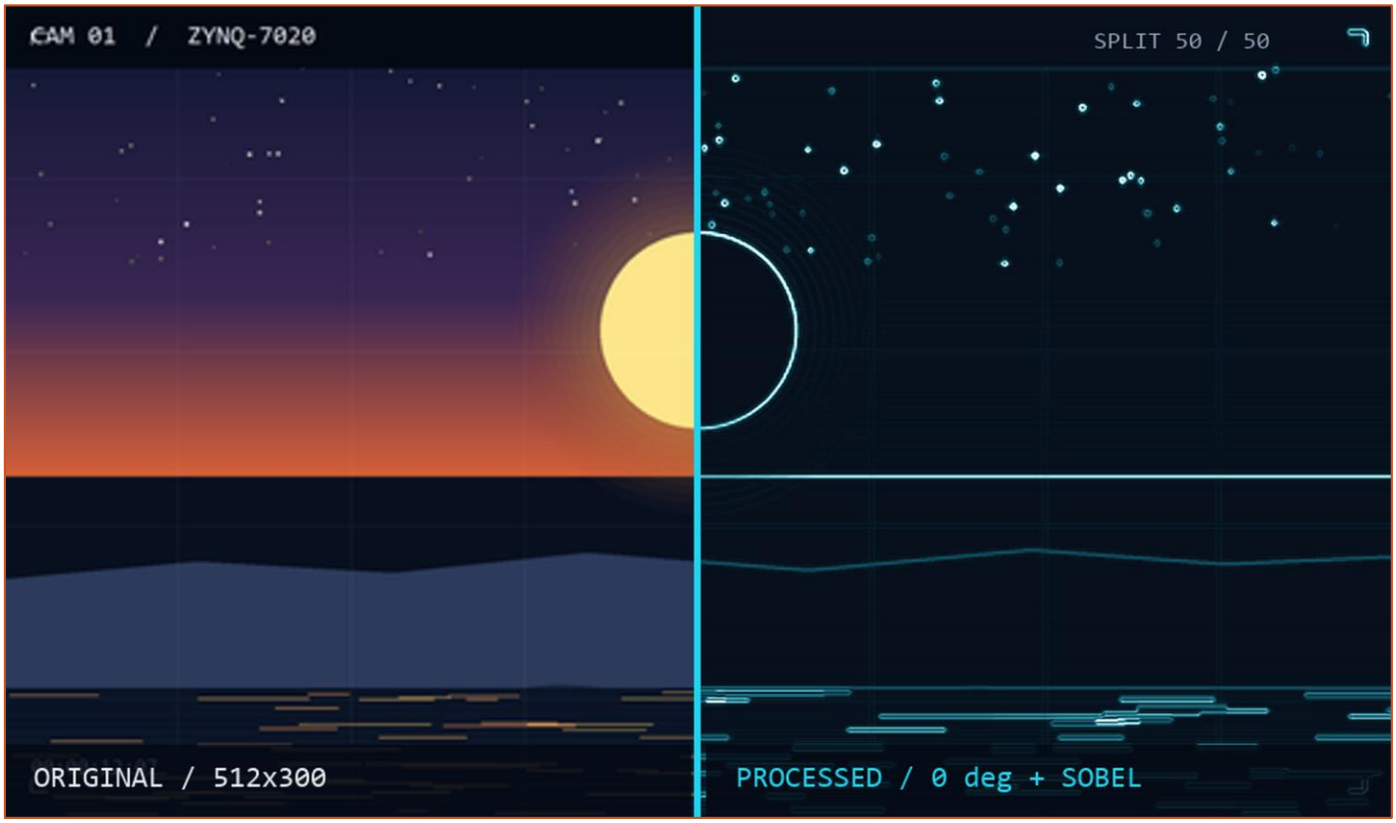

Rendered from the same test frame; two panes, one frame identity.

01 SAME-FRAME A/B

Fixed 15-cycle chain; the seam is a pixel decision.

02 TELEMETRY

Frames, aborts, rows, latency, pane and gaps at 1 Hz.

03 FAULT INJECTION

Drop 1 in 100; aborts move; recovery returns.

1.341 ns
setup WNS · 0 failing endpoints

0.025 ns
hold WHS · tightest path

70.00%
BRAM · 98 of 140 tiles

15 cycles
fixed effect latency

RGMII → MAC → UDP → DDR → GEOMETRY → 6-STAGE EFFECTS → A/B SEAM → HDMI

512×300 RGB565 at 30 fps → 1024×600 at 59.5 Hz · xc7z020clg484-2 · 1 GbE UDP ingest · SD and test-pattern fallback

29.95 FPS · PANE_BAD=0 · QSPI COLD BOOT

AMD, the AMD Arrow logo and combinations thereof are trademarks of Advanced Micro Devices, Inc. Zynq is a trademark of AMD. All other trademarks are the property of their respective owners.