Capacitors

*Capacitors—devices that store electric charge. Capacitors* are commonly used in a variety of electric circuits. For instance, they are used to

- tune the frequency of radio receivers,
- as filters in power supplies,
- to eliminate sparking in automobile ignition systems, and
- as energy-storing devices in electronic flash units.

Consider two conductors carrying charges of equal magnitude but of opposite sign, as shown in Figure. Such a combination of two conductors is called a capacitor. The conductors are called *plates. A potential difference V exists between* the conductors due to the presence of the charges.

The **capacitance** *C* of a capacitor is the ratio of the magnitude of the charge on either conductor to the magnitude of the potential difference between them:

$$C \equiv \frac{Q}{\Delta V}$$

(26.1)
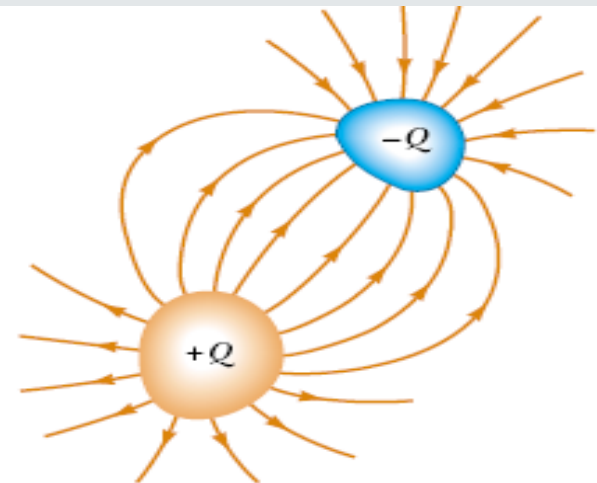
CALCULATING CAPACITANCE

Parallel-Plate Capacitors

Two parallel metallic plates of equal area *A are separated by a distance d, as shown* in Figure. One plate carries a charge Q , *and the other carries a charge Q.*
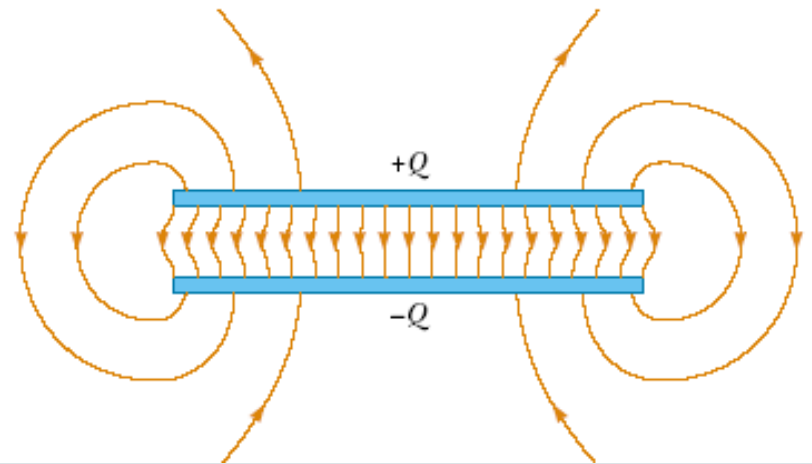
The value of the electric field between the plates is

$$E = \frac{\sigma}{\epsilon_0} = \frac{Q}{\epsilon_0 A}$$

$$\Delta V = Ed = \frac{Qd}{\epsilon_0 A}$$

$$C = \frac{Q}{\Delta V} = \frac{Q}{Qd/\epsilon_0 A}$$

$$C = \frac{\epsilon_0 A}{d}$$

the capacitance of a parallel-plate capacitor is proportional to the area of its plates and inversely proportional to the plate separation,

The Cylindrical Capacitor

A solid cylindrical conductor of radius a and charge Q is coaxial with a cylindrical shell of negligible thickness, radius $b > a$, and charge $-Q$

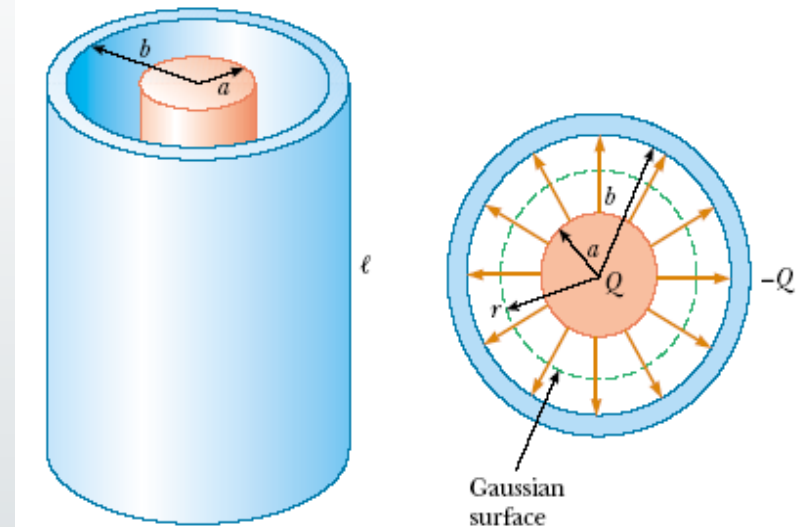First calculate the potential difference between the two cylinders,

$$V_b - V_a = -\int_a^b \mathbf{E} \cdot d\mathbf{s} \qquad E_r = 2k_e\lambda/r$$

$$V_b - V_a = -\int_a^b E_r\,dr = -2k_e\lambda \int_a^b \frac{dr}{r} = -2k_e\lambda \ln\left(\frac{b}{a}\right)$$

$$C = \frac{Q}{\Delta V} = \frac{Q}{\dfrac{2k_e Q}{\ell} \ln\left(\dfrac{b}{a}\right)} = \frac{\ell}{2k_e \ln\left(\dfrac{b}{a}\right)}$$

Gaussian surface

$$\frac{C}{\ell} = \frac{1}{2k_e \ln\left(\dfrac{b}{a}\right)}$$
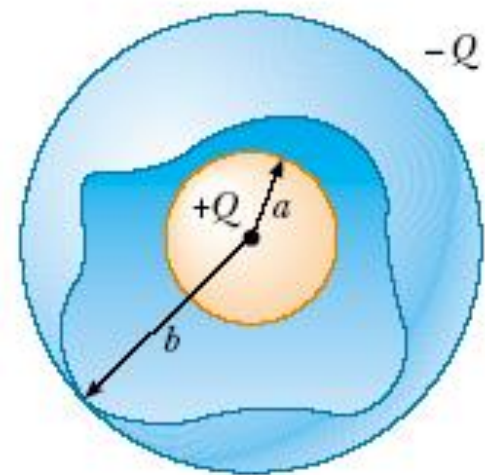
the capacitance per unit length

The Spherical Capacitor

A spherical capacitor consists of a spherical conducting shell of radius b and charge $-Q$ concentric with a smaller conducting sphere of radius a and charge Q

$$V_b - V_a = - \int_a^b E_r \, dr = -k_e Q \int_a^b \frac{dr}{r^2} = k_e Q \left[\frac{1}{r} \right]_a^b$$

$$= k_e Q \left(\frac{1}{b} - \frac{1}{a} \right)$$

$$\Delta V = | V_b - V_a | = k_e Q \frac{(b - a)}{ab}$$

$$C = \frac{Q}{\Delta V} = \frac{ab}{k_e (b - a)}$$

COMBINATIONS OF CAPACITORS

Parallel Combination

The individual potential differences across capacitors connected in parallel are all the same and are equal to the potential difference applied across the combination.

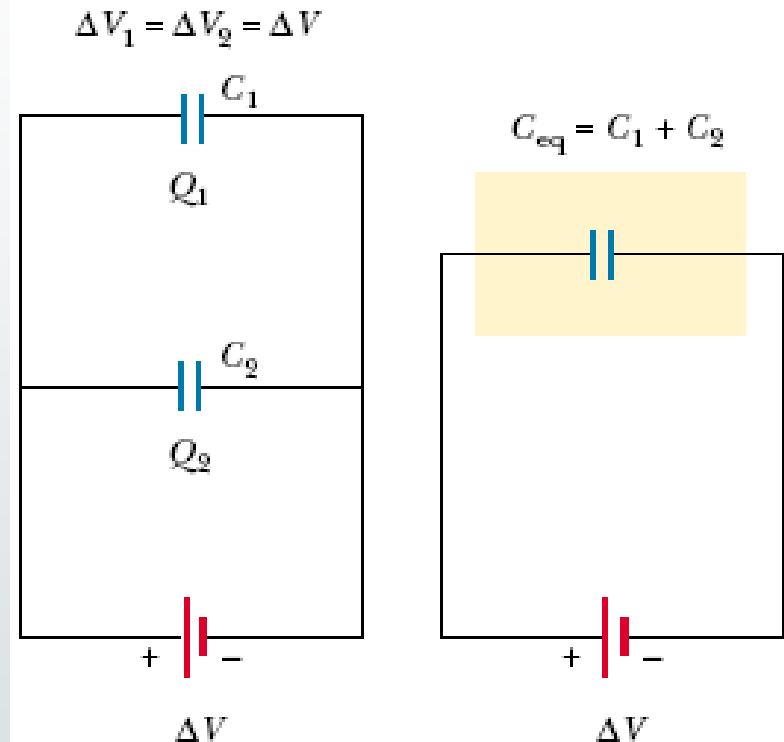The *total charge* Q stored by the two capacitors is

$$Q = Q_1 + Q_2$$

$$Q_1 = C_1 \Delta V \qquad Q_2 = C_2 \Delta V \qquad Q = C_{eq} \Delta V$$

$$C_{eq} \Delta V = C_1 \Delta V + C_2 \Delta V$$

$$C_{eq} = C_1 + C_2 \qquad \binom{\text{parallel}}{\text{combination}}$$

$$C_{eq} = C_1 + C_2 + C_3 + \cdots \qquad \text{(parallel combination)}$$

$$\Delta V_1 = \Delta V_2 = \Delta V$$

$$C_{eq} = C_1 + C_2$$

COMBINATIONS OF CAPACITORS
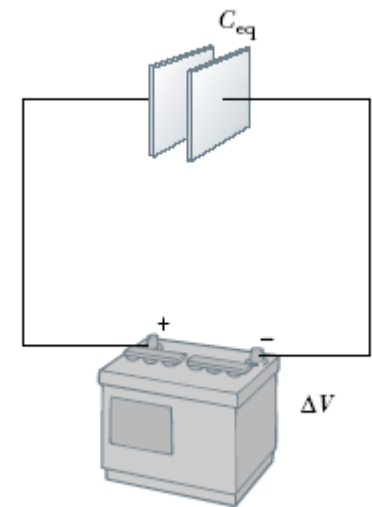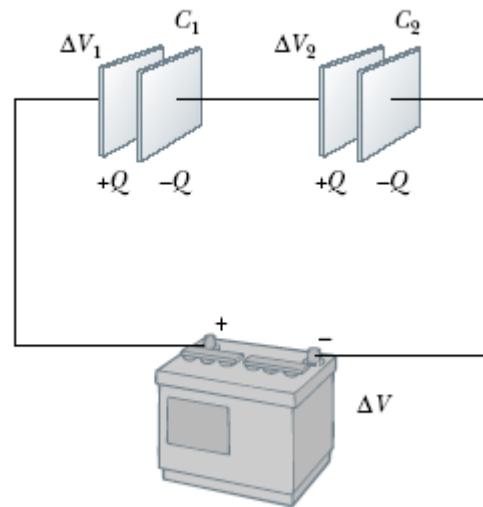
Series Combination

$$\Delta V = \Delta V_1 + \Delta V_2$$

$$\Delta V_1 = \frac{Q}{C_1} \qquad \Delta V_2 = \frac{Q}{C_2} \qquad \Delta V = \frac{Q}{C_{eq}}$$

$$\frac{Q}{C_{eq}} = \frac{Q}{C_1} + \frac{Q}{C_2}$$

$$\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} \qquad \left(\begin{array}{l}\text{series}\\ \text{combination}\end{array}\right)$$

$$\frac{1}{C_{eq}} = \frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \cdots \qquad \left(\begin{array}{l}\text{series}\\ \text{combination}\end{array}\right)$$

This demonstrates that **the equivalent capacitance of a series combination is always less than any individual capacitance in the combination.**

ENERGY STORED IN A CHARGED CAPACITOR

Suppose that *q is the charge on the capacitor at some instant during the charging* process. At the same instant, the potential difference across the capacitor is ΔV = q/C.
the work necessary to transfer an increment of charge *dq from the plate carrying charge -q to the plate carrying* charge *q (which is at the higher electric potential)* is

$$dW = \Delta V\, dq = \frac{q}{C}\, dq$$

$$W = \int_0^Q \frac{q}{C}\, dq = \frac{1}{C} \int_0^Q q\, dq = \frac{Q^2}{2C}$$

$$U = \frac{Q^2}{2C} = \tfrac{1}{2} Q\,\Delta V = \tfrac{1}{2} C(\Delta V)^2$$

Energy stored in a parallel-plate capacitor

$$U = \frac{1}{2}\frac{\epsilon_0 A}{d}(E^2 d^2) = \frac{1}{2}(\epsilon_0 A d)E^2$$

energy per unit volume $u_E = U/V = U/Ad$,

Energy density in an electric field

$$u_E = \tfrac{1}{2}\epsilon_0 E^2$$

energy density in any electric field is proportional to the square of the magnitude of the electric field at a given point.

CAPACITORS WITH DIELECTRICS

A dielectric is a non conducting material, such as rubber, glass, or waxed paper.
When a dielectric is inserted between the plates of a capacitor, the capacitance increases.
If the dielectric completely fills the space between the plates, the capacitance increases by a dimensionless factor κ, which is called the dielectric constant.

$$\Delta V = \frac{\Delta V_0}{\kappa}$$

$$C = \frac{Q_0}{\Delta V} = \frac{Q_0}{\Delta V_0/\kappa} = \kappa \frac{Q_0}{\Delta V_0}$$

$$C = \kappa C_0$$

$$C = \kappa \frac{\epsilon_0 A}{d}$$

advantages:

- Increase in capacitance
- Increase in maximum operating voltage
- Possible mechanical support between the plates, which allows the plates to be close together without touching, thereby decreasing d and increasing C
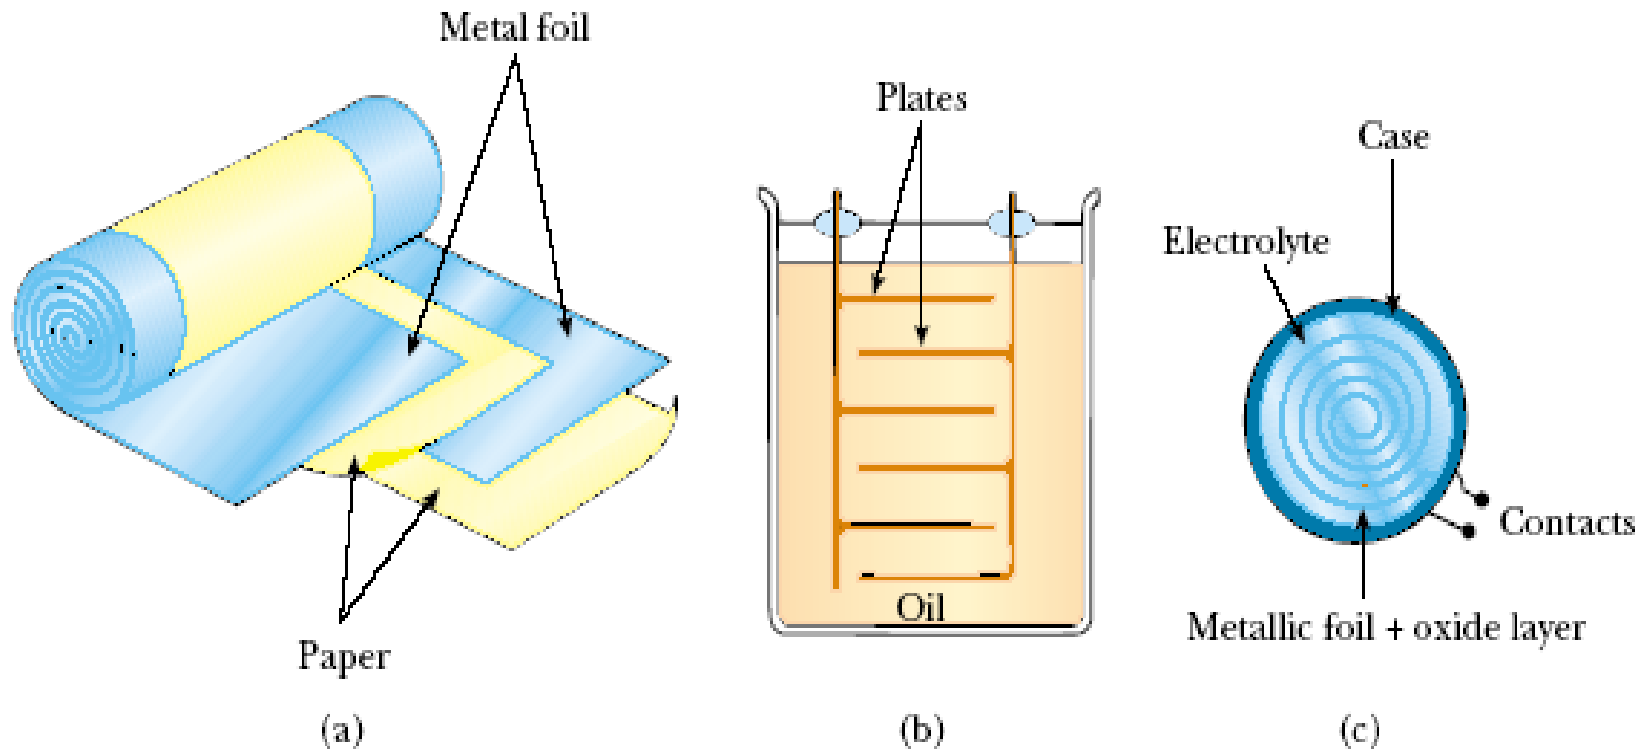
Types of Capacitors

Figure 26.15 Three commercial capacitor designs. (a) A tubular capacitor, whose plates are separated by paper and then rolled into a cylinder. (b) A high-voltage capacitor consisting of many parallel plates separated by insulating oil. (c) An electrolytic capacitor.

AN ATOMIC DESCRIPTION OF DIELECTRICS
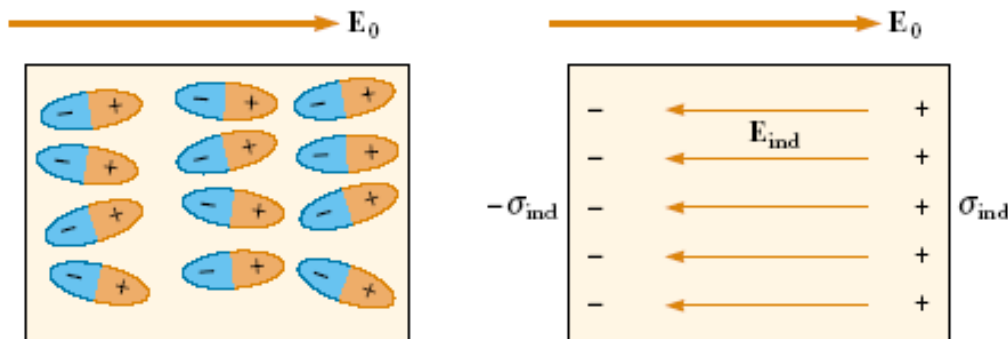
the field in the presence of a dielectric is

$$E = \frac{E_0}{\kappa}$$

(a) Polar molecules are randomly oriented in the absence of an external electric field.

(a)

(b) When an external field is applied, the molecules partially align with the field.

$$E = E_0 - E_{ind}$$