
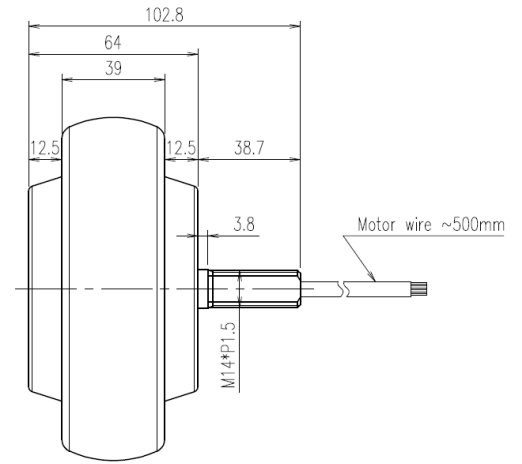


인휠모터

MDH100

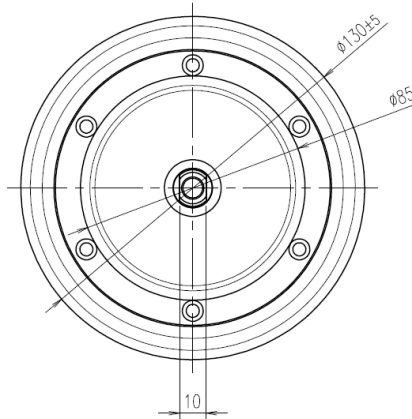

모터타입 (Types of motor)		HBDS2D04E0100-D130
정격전압 (Rated voltage)		24VDC
극수 (Poles)		20poles
정격파워 (Rated power)		100~200W
정격전류 (Rated current)		2-8A
정격토크 (Rated Torque)		3.2N.m(32kg-cm)
최대토크 (Max. Torque)		6.4N.m(64kg-cm)
바퀴크기 (Wheel size)		Ø130
Encoder resolution		4,096PPR(Pulse/revolution)
무게 (Weight)		2kg
Payload		< 60kg
Rated speed (rpm)		400rpm
Max. speed (rpm)		430rpm
방호등급 (Protection)		IP65
선속도 (at 300rpm) (Rated linear velocity)	m/s	2.0m/s
	km/h	7.3km/h

■ 단자(Connector)

Hall sensor

PIN	1	2	3	4	5
Name	Hu	Hv	Hw	Gnd	Vcc
Color	Yellow	Green	Blue	Black	Red

Encoder

PIN	1	2	3	4	5
Name	-	B	A	-	-
Color		Gray	Purple		

Motor(U,V,W)

PIN	1	2	3
Name	U	V	W
Color	Green	Yellow	Blue

■ 성능곡선

Performance curve-24V

