


6-3

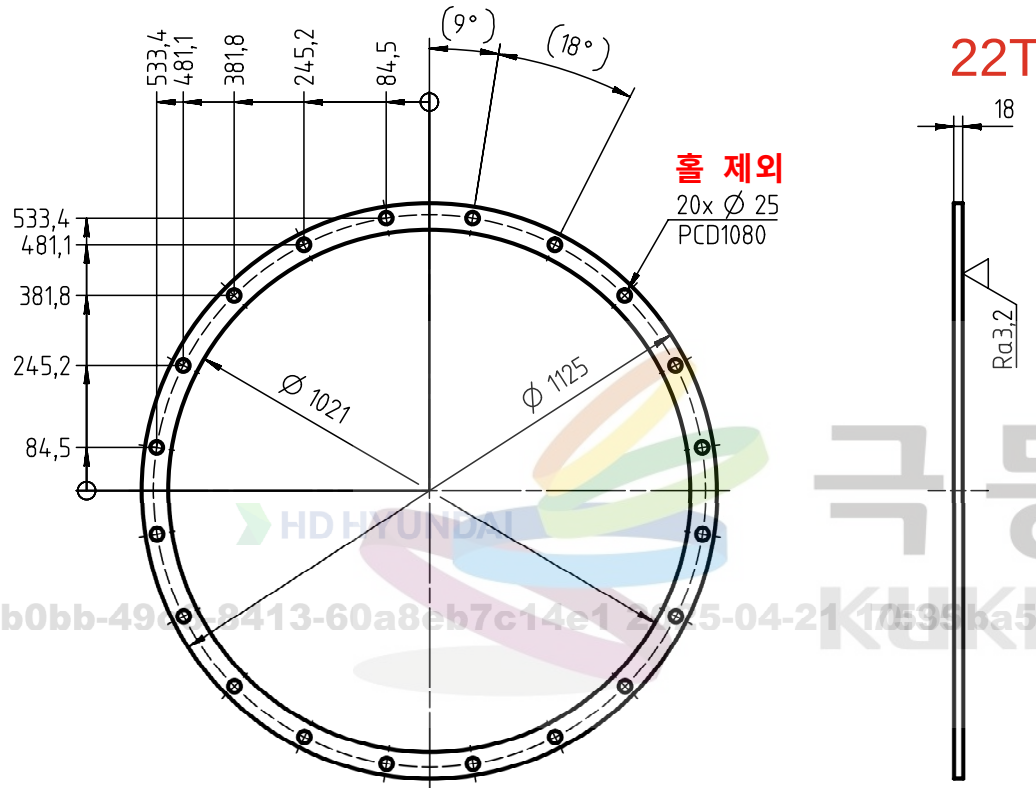

BASED ON SLIP-ON FLANGE
KS V 7815 JIS F 7805

$\sqrt{Ra_{12,5}}$ ($\sqrt{Ra_{3,2}}$)

ALL UNTOLERANCED COORDINATE-DIMENSIONS
FOR THE BORES HAVE TO BE ± 0.5

NOTE)
용접 후 HOLE 가공 할 것.

Date	DSN	CHK	APP	Act code	Exchangeability	Change / Replacement	ECN No.	Rev
SSC	2025-02-03	LSO	JDH	CSW		MOD. NAME		1
	2024-02-19	LSO	JDH	AJY				0
SIM. Drawing No.	LIC. Material / Blank				Material / Blank	Mass(kg)		
LIC Drawing No.	W-FU-235-JR				SS400	23.381		
Engine / Product Type	Title				Page No.	Scale	Units	Projection
					1/1	1:10	mm kg	1st
					Info No.	Distribution	Security	
								B
FLANGE (JIS 1K-1000A)								
Drawing No. A23-369433-5 Size A3 HD HYUNDAI HEAVY INDUSTRIES								

Tolerances for dimensions without tolerance indication (ISO 2768-1989)						
This standard states the permissible deviations for dimensions without direct tolerance indications on metallic components manufactured by machining.						
Permissible deviations	Basic size range (mm)	0.5 up to 6	over 6 up to 30	over 30 up to 120	over 120 up to 315	over 315 up to 1000
Medium series		±0.1	±0.2	±0.3	±0.5	±0.8
					±1.2	

Standard for surface roughness												
The basic symbolic and class number are in according with ISO 1302-1978												
Class No.	N1	N2	N3	N4	N5	N6	N7	N8	N9	N10	N11	N12
R _a max. μ	0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50