

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u197



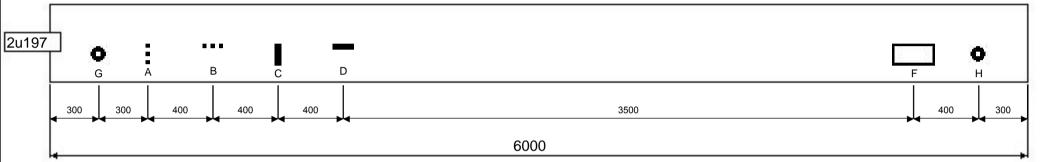

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Interno Transverse ID	1,00	5	±15	0,713	0,527	0,620	50,80	48,00	0,710	0,710	0,96	Sebastian Monteros	22/06/04
В	Longitudinal Interno Longitudinal ID	1,00	5	±15	0,713	0,527	0,620	50,80	49,20	0,640	0,640	0,96	Sebastian Monteros	22/06/04
С	Transversal Externo Transverse OD	1,00	5	±15	0,713	0,527	0,620	50,80	49,00	0,610	0,640	0,91	Sebastian Monteros	22/06/04
D	Longitudinal Externo longitudinal OD	1,00	5	±15	0,713	0,527	0,620	50,80	50,00	0,650	0,650	0,92	Sebastian Monteros	22/06/04
F	Chavetero Grove	16,00	50	±15	7,130	5,270	6,200	30,00	30,00	50,000	50,000	16,00	Sebastian Monteros	22/06/04
G	Agujero Pasante Drilled hole	3,00	-	-	-	-	-		-	-	-	3,00	Sebastian Monteros	22/06/04
	Agujero Pasante Drilled hole	3,00	-	-	-	-	-	-	-	-	-	3,00	Sebastian Monteros	22/06/04

## Notas:

- 1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.
- 2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

## Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO

OT-PMANT

Fecha Date 22/06/2004 08:59:59 a.m. Hoja Page

1/2 Documento Vigencia

TAND-001-05 17/04/2006



## CERTIFICADO PATRON DE CND

**TEND** 

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u197

Datos del Producto Product Information									
Diametro [mm] Diameter	168,3	Cliente Client	Ciclo Product	72656					
Espesor [mm] Wall Thickness	12,4	Tratamiento Termico Heat Treatment	Colada <sub>Heat</sub>	0					
Trazabilidad Traceability	0		Expediente Manufacturing Order						

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO