

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate



1c565

Datos del Producto Product Information								
Diametro [mm] Diameter	79,4	Cliente Client	Ciclo Product	27468				
Espesor [mm] Wall Thickness	7,95	Tratamiento Termico	Colada <sub>Heat</sub>	0				
Trazabilidad Traceability	0		Expediente Manufacturing Order					

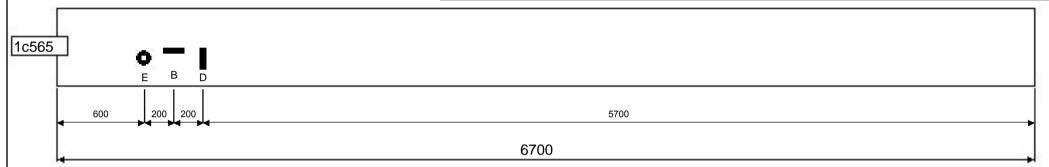

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	[mm]	[mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
ıĸ	Longitudinal Externo longitudinal OD	1,00	5	±15	0,457	0,338	0,398	Max Length 30,00	30,00	5,000	5,000	1,00	Sebastian Monteros	03/11/04
D	Transversal Externo Transverse OD	1,00	5	±15	0,457	0,338	0,398	30,00	30,00	5,000	5,000	1,00	Sebastian Monteros	03/11/04
E	Agujero Pasante Drilled hole	1,60	-	-	-	-	-	-	-	-	-	1,60	Sebastian Monteros	03/11/04

## Instrumentos de Medicion Utilizados:

## Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

## Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO