

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate

Tubo patrón número Reference standard #

**SS0207** 

Datos del Producto Product Information									
Diametro [mm] Diameter	114,3	Cliente Client	DEMO	Ciclo Product	60300				
Espesor [mm] Wall Thickness	8,6	Tratamiento Termico	DEMO	Colada <sub>Heat</sub>	36255				
Trazabilidad Traceability	0			Expediente Manufacturing Order	DEMO				

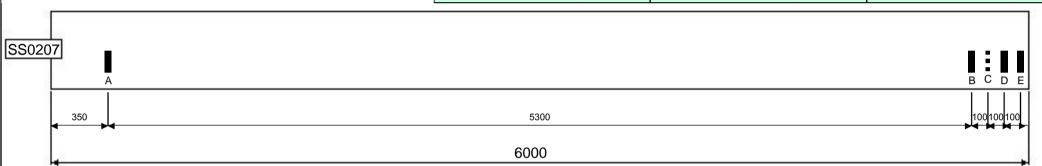

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Externo Transverse OD	1,00	10	±15	0,989	0,731	0,860	50,80	24,50	0,486	0,488	0,83	Pablo Mazzeo	11/06/10
В	Transversal Externo Transverse OD	1,00	5	±15	0,495	0,366	0,430	50,80	24,50	0,487	0,488	0,84	Pablo Mazzeo	11/06/10
С	Transversal Interno Transverse ID	1,00	5	±15	0,495	0,366	0,430	50,80	23,30	0,468	0,486	0,84	Dante Antunez	11/06/10
D	Transversal Externo Transverse OD	1,00	10	±15	0,989	0,731	0,860	50,80	24,50	0,488	0,480	0,84	Pablo Mazzeo	11/06/10
Е	Transversal Externo Transverse OD	1,00	5	±15	0,495	0,366	0,430	25,40	24,50	0,490	0,493	0,84	Pablo Mazzeo	11/06/10

## Instrumentos de Medicion Utilizados:

## Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA SI

## Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA YES