

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

1C1983

Datos del Producto Product Information									
Diametro [mm] Diameter			BERKINE	Ciclo Product	60528				
Espesor [mm] Wall Thickness	7,7	Tratamiento Termico	SI	Colada _{Heat}	38327				
Trazabilidad Traceability	0			Expediente Manufacturing Order	5298202				

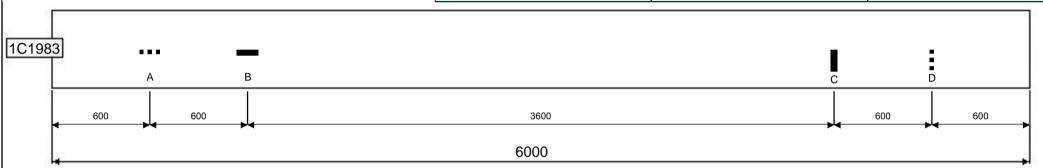

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
A	Longitudinal Interno Longitudinal ID	1,00	10	±15	0,886	0,655	0,770	50,00	46,70	0,821	0,825	0,83	Default Default	21/03/11
В	Longitudinal Externo longitudinal OD	1,00	5	±15	0,443	0,327	0,385	50,00	46,70	0,406	0,393	0,85	Default Default	21/03/11
С	Transversal Externo Transverse OD	1,00	5	±15	0,443	0,327	0,385	50,00	40,60	0,392	0,387	0,84	Default Default	21/03/11
D	Transversal Interno Transverse ID	1,00	10	±15	0,886	0,655	0,770	50,00	40,40	0,847	0,814	0,83	Default Default	21/03/11

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA SI

Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA YES

1/2