


CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate



1U0445

Datos del Producto Product Information									
Diametro [mm]	88,9	Cliente Client	DEMO	Ciclo Product	84698				
Espesor [mm] Wall Thickness	9,3	Tratamiento Termico	DEMO	Colada _{Heat}	38929				
Trazabilidad Traceability	0			Expediente Manufacturing Order	DEMO				

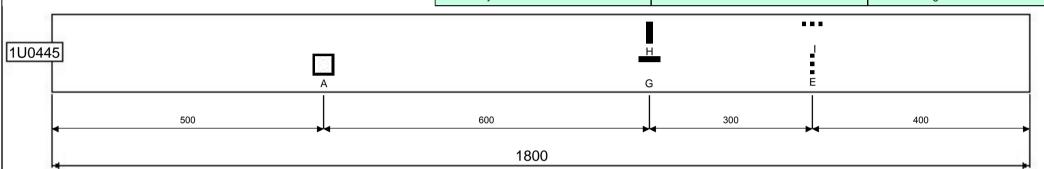

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Reduccion de Espesor Externo	1,00	5	±15	0,535	0,395	0,465	50,00	50,00	-	-	25,00	Daniel Carcacha	01/07/10
E	Transversal Interno Transverse ID	2,20	-	-	-	-	-	-	32,00	1,027	0,979	0,87	Dante Antunez	01/07/10
G	Longitudinal Externo longitudinal OD	6,35	25	+5-0	2,441	2,325	2,325	-	35,70	0,465	0,474	0,86	Dante Antunez	30/06/10
Н	Transversal Externo Transverse OD	6,35	50	+5-0	4,883	4,650	4,650	-	37,30	0,512	0,508	0,86	Dante Antunez	30/06/10
I	Longitudinal Interno Longitudinal ID	6,35	75	+5-0	7,324	6,975	6,975	-	36,20	0,903	0,997	0,88	Daniel Carcacha	30/06/10

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA SI

Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA YES

1/2