

OPTION 1 - Single-point attachment

Veliko Tarnovo

SELECTED ATTACHMENT SOLUTION	VERTICAL LOAD AT BASE POINT X0	TOTAL HORIZONTAL LOAD ON ONE COLUMN
OPTION 1	13.50 kN	3.80 kN
Single-point attachment	Calculated load	Calculated load

SELECTED CONFIGURATION

STRUCTURE TYPE	HEIGHT	ATTACHMENT SCHEME	UNITS
Climbing wall	9 m	2 levels	Metric
COLUMN SPAN A	OVERHANG X	VALUES	STANDARD
-	7 m	Characteristic	EN 12572-1

LOADS AT SELECTED FORCE LEVEL - Z2

ATTACHMENT POINT	DL	LL
RZ0 - Base vertical	-5.50	-8.00
RX0 - Base horizontal	-0.93	-1.62
RX1 - Side point X1	0.30	2.29
RX2 - Side point X2	0.35	1.09

PRELIMINARY LOADS - NOT FOR CONSTRUCTION.

OPTION 1 - Single-point attachment

9 m wall | X = 7 m | 2 levels | selected force level Z2

LOAD APPLICATION - SIDE ELEVATION



SELECTED ATTACHMENT DETAILS

DETAIL

CF-01

Base connection detail 01

Solid concrete slab

DETAIL

CW-01

Solid concrete wall detail 01

Solid concrete wall

OPTION 2 - Walltopia support beams

Veliko Tarnovo

SELECTED ATTACHMENT SOLUTION	VERTICAL LOAD AT BASE POINT X0	TOTAL HORIZONTAL LOAD ON ONE COLUMN
OPTION 2	13.50 kN	11.50 kN
Walltopia support beams	Calculated load	Calculated load

SELECTED CONFIGURATION

STRUCTURE TYPE	HEIGHT	ATTACHMENT SCHEME	UNITS
Climbing wall	9 m	2 levels	Metric
COLUMN SPAN A	OVERHANG X	VALUES	STANDARD
8 m	7 m	Characteristic	EN 12572-1

LOADS AT SELECTED FORCE LEVEL - Z2


ATTACHMENT POINT	DL	LL
RZ0 - Base vertical	-5.50	-8.00
LX1 - Building column X1	1.80	5.15
LX2 - Building column X2	2.10	2.45

PRELIMINARY LOADS - NOT FOR CONSTRUCTION.

OPTION 2 - Walltopia support beams

9 m wall | A = 8 m | X = 7 m | 2 levels | selected force level Z2

ACS GEOMETRY AND COLUMN LOADS

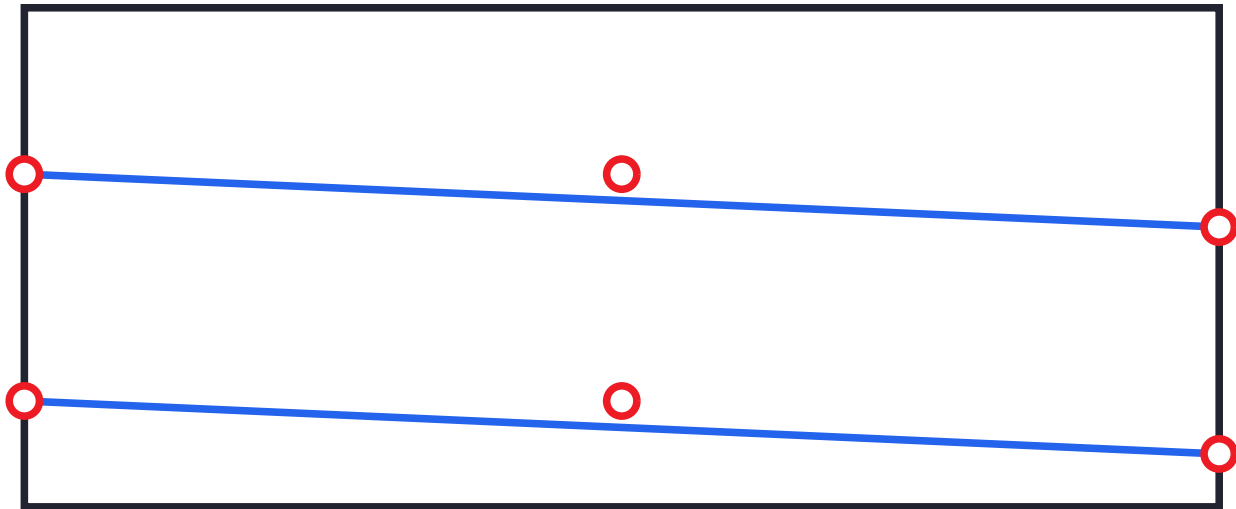

SELECTED ATTACHMENT DETAILS

DETAIL

CF-01

Base connection detail 01

Solid concrete slab

DETAIL

CW-02

Solid concrete wall detail 02

Solid concrete column