## McMASTER-CARR®

## Tygon PVC Tubing for Food, Beverage, and Dairy 3/8" ID, 1/2" OD

In stock \$2.29 per ft. 6546T16




| For Use With         | Food, Beverage, Dairy  |
|----------------------|--|
| Material             | PVC Plastic  |
| Trade Name           | Tygon  |
| Trade Number         | B-44-4X  |
| Hardness Rating      | Soft   |
| Hardness             | Durometer 65A  |
| End Type             | Without Fittings   |
| Connection Type      | Tube   |
| For Connection Style | Barbed   |
| Clarity              | Clear  |
| ID                   | 3/8"   |
| OD                   | 1/2"   |
| Wall Thickness       | 1/16"  |
| Flexibility          | Flexible   |
| Bend Radius          | 1 3/4"   |
| Temperature Range    | -30° to 160° F   |
| Maximum Pressure     | 25 psi @ 72° F   |
| Maximum Vacuum       | Not Rated  |
| Color                | Clear  |
| Length               | 50 ft.   |
| Specifications Met   | Made of FDA Listed Materials, NSF/ANSI Standard 51 for Food Contact, 3-A Certified |
| Sterilize With       | Gas, Steam (Autoclaving)   |
| RoHS                 | RoHS 3 (2015/863/EU) Compliant   |
| REACH                | REACH (EC 1907/2006) (01/16/2020, 205 SVHC) Compliant                              |
| Country of Origin    | United States  |
|                      |  |

The industry standard for general purpose food, beverage, and dairy applications, this tubing is made of FDA listed materials and meets NSF/ANSI Standard 51 for food contact. Tubing doesn't contain plasticizers like DEHP, so it won't impart tastes or odors to the fluid passing through it. It has a nonabsorbing surface, which makes it easy to clean. Tubing is clear, so you can easily monitor flow through the line. It is flexible, so it bends easily around objects.

Tygon PVC tubing can withstand lower temperatures than standard PVC tubing. It is 3-A certified for dairy.

https://www.mcmaster.com/6546T16

Length, Feet: 25, Length, Feet: 5, Length, Feet: 10, Length, Feet: 50

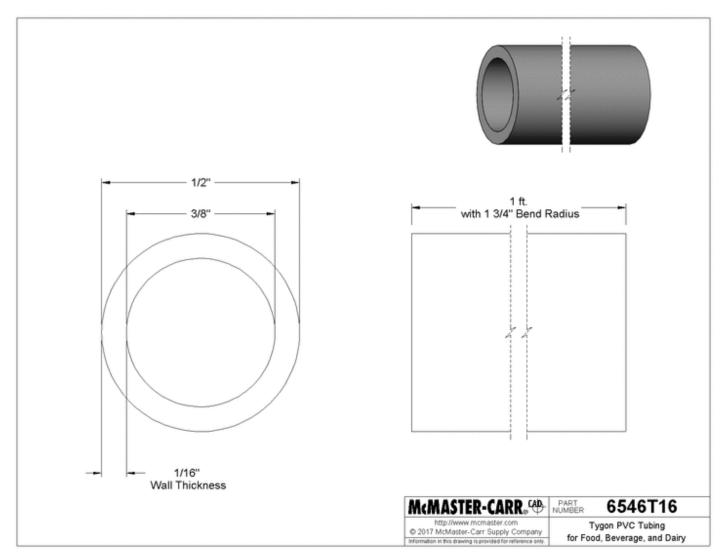

The information in this 3-D model is provided for reference only.