



Quality Assurance Report (도금두께 상향)

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.6*30	20250515 -01 ~ 10	2025-05-15
규격(재질)		LOT SIZE(수량)	
0.6*30 AL	Ni 1.5 μ m ~	610Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(일룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금)

4/15
0.6X30
① 61 ⑥ 61
② 61 ⑦ 61
③ 61 ⑧ 61
④ 61 ⑨ 61
⑤ 61 ⑩ 61
총 610kg


II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Reel)


NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	30.0	-0.1		Reel/Lot	29.991	0.602
2						29.980	0.603
3						29.994	0.603
4						29.977	0.601
5						29.998	0.601
6						29.966	0.603
7						29.997	0.602
8						29.992	0.602
9						29.982	0.601
10						29.993	0.602

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정	Ni 1.5 μ m ~	첨부 : 도금성적서	OK
			첨부 : 도금성적서	

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

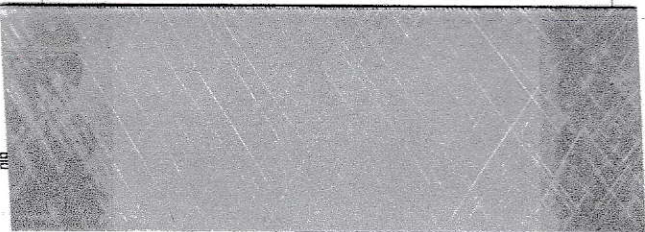NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(들뜸 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상.하각은후 도금물론이나 벗겨짐이 없을것.		OK

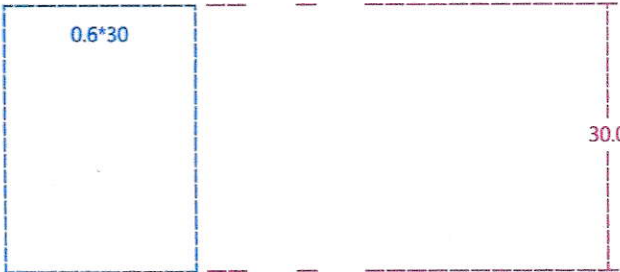제품도면		우리하이피	작성	승인	종합판정	
			김영란	조승현		
		고객	작성	승인	종합판정	


고객명: 신흥SEC

품명 : 0.6X30 초물 LOT NO : 250515-01 DATE : 25.05.15.

No	μm Ni	Ni tolerance		
		2.371	2.418	2.466
1	2.409			
2	2.399			
3	2.371			
4	2.418			
5	2.447			
6	2.466			
Mean	2.418			
S.Dev	0.034			


FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Al}}$
SEC : 15 Sec

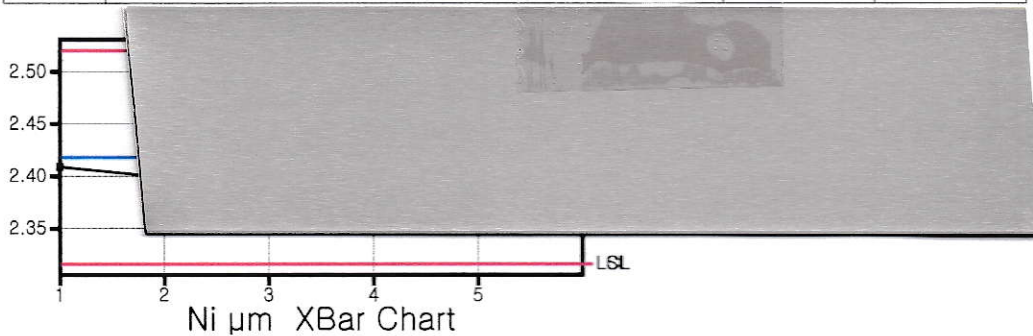

도금원소 : Ni//Al
측정값 개수 6
최대값 2.466
최소값 2.371
범위 0.095
평균값 2.418
표준편차 0.034
변동계수 1.408

우리하이피(주)

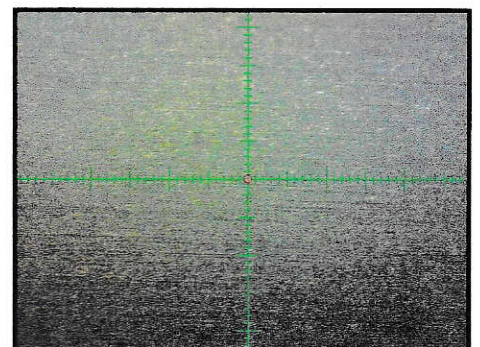

고객명: 신흥SEC


품명 : 0.6X30 초물 LOT NO : 250515-10 DATE : 25.05.15.

No	μm Ni	Ni tolerance		
		2.407	2.454	2.500
1	2.426			
2	2.471			
3	2.500			
4	2.440			
5	2.465			
6	2.419			
Mean	2.454			
S.Dev	0.031			

FUNC: MEASURE
COL : 0.100 mm

Ni
—
Al

SEC : 15 Sec

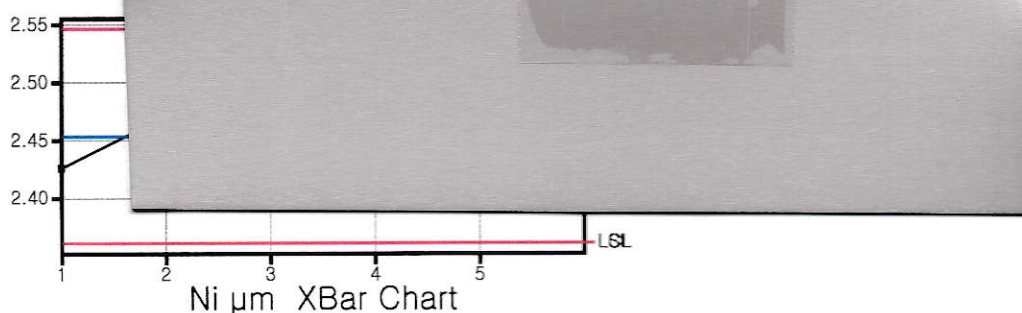

도금원소 : Ni//Al
측정값 개수 6
최대값 2.500
최소값 2.419
범위 0.081
평균값 2.454
표준편차 0.031
변동계수 1.254

우리하이피(주)

