



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*30	20250912 -01~	14 2025-09-12
규격(재질)		LOT SIZE(수량)	
0.4*30 AL	Ni 1.5 μ m ~	836 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(일룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금)

4/12

0.4 x 30

① 44 ② 46 ③ 46
④ 46 ⑤ 46 ⑥ 46
⑦ 46 ⑧ 46 ⑨ 46
⑩ 46 ⑪ 46 ⑫ 46
⑬ 46 ⑭ 46 ⑮ 46

총 836kg


II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	30.0	-0.1		Reel/Lot	29.973	0.403
2						29.963	0.404
3						29.987	0.402
4						29.986	0.401
5						29.982	0.402
6						29.974	0.403
7						29.979	0.404
8						29.961	0.403
9						29.986	0.403
10						29.948	0.401

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정		첨부 : 도금성적서	OK
		Ni 1.5 μ m ~	첨부 : 도금성적서	

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

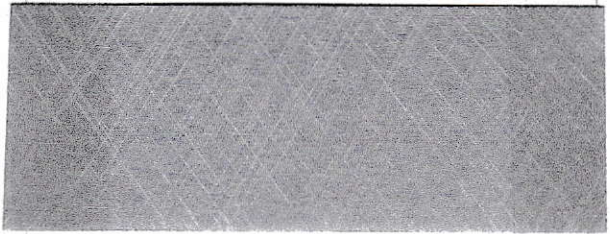NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1. 제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(돌뿔 및 벗겨짐) 2. 테이프 시험이 안되는 제품은 니퍼로 90도로 상 하각은후 도금돌뿔이나 벗겨짐이 없을것.		OK

제품도면		우리하이피	작성	승인	종합판정	
			김영란	조승현		
		고객	작성	승인	종합판정	


고객명: 신흥SEC

품명 : 0.4X30 초물 LOT NO : 250912-01 DATE : 25.09.12.

No	μm Ni	Ni tolerance
1	2.011	2.001 2.046 2.090
2	2.049	
3	2.067	
4	2.035	
5	2.022	
6	2.090	
Mean	2.046	
S.Dev	0.029	


FUNC: MEASURE
COL : 0.100 mm

Ni
Al
SEC : 15 Sec

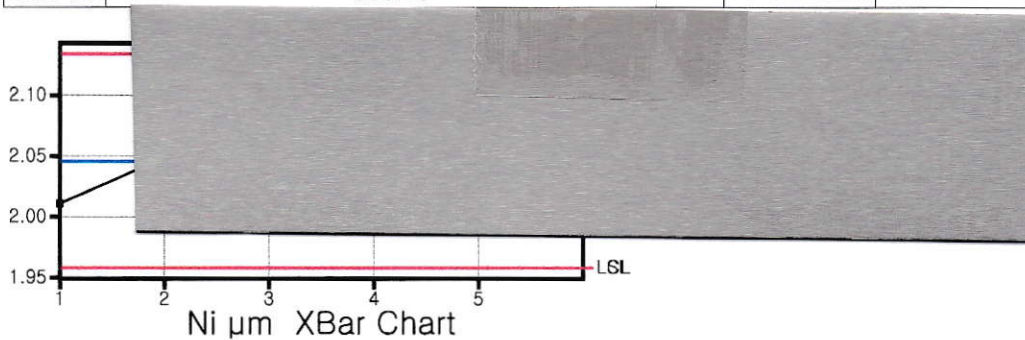

도금원소 : Ni//Al
측정값 개수 6
최대값 2.090
최소값 2.011
범위 0.079
평균값 2.046
표준편차 0.029
변동계수 1.435

우리하이피(주)

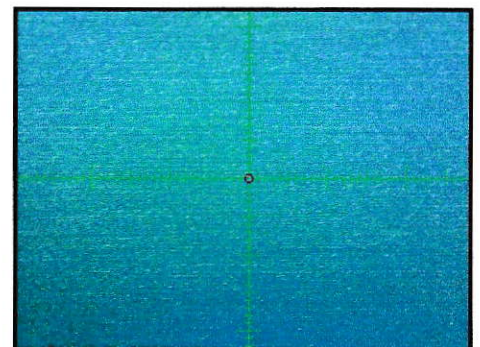


고객명: 신흥SEC

품명 : 0.4X30 초물 LOT NO : 250912-15 DATE : 25.09.12.

No	μm Ni	Ni tolerance		
		2.034	2.066	2.099
1	2.071			
2	2.086			
3	2.060			
4	2.055			
5	2.092			
6	2.034			
Mean	2.066			
S.Dev	0.021			

FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Al}}$
SEC : 15 Sec

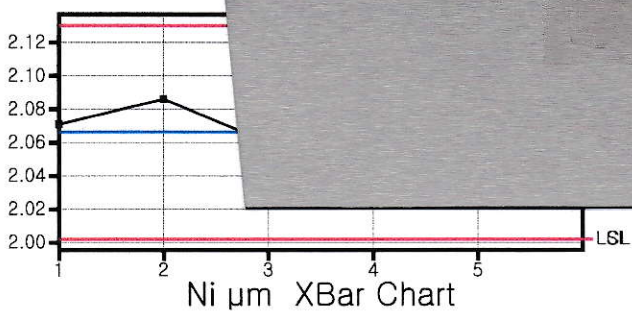

도금원소 : Ni//Al

측정값 개수 6
최대값 2.092
최소값 2.034
범위 0.058
평균값 2.066
표준편차 0.021
변동계수 1.034

우리하이피(주)

