



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*30	20250926 -01	2025-09-26
규격(재질)		LOT SIZE(수량)	
0.4*30 AL	Ni 1.5 μ m ~	56 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Shipping, c=0)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)	0/1	OK
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)	0/1	OK
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)	0/1	OK
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)	0/1	OK
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금버)	0/1	OK

II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/Shipping, c=0)


NO	항목/구분	SPEC			검사주기	우리하이피		고객		판정
		규격	하한(-)	상한(+)		1차	2차	1차	2차	
1	전폭	30.0	-0.1		Reel/Lot	29.989	0.403			OK
2										
3										
4										
5										
6										
7										
8										
9										
10										

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정	Ni 1.5 μ m ~	첨부 : 도금성적서 첨부 : 도금성적서	OK

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(돌돌 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상 하각은후 도금돌돌 이나 벗겨짐이 없을것.		OK

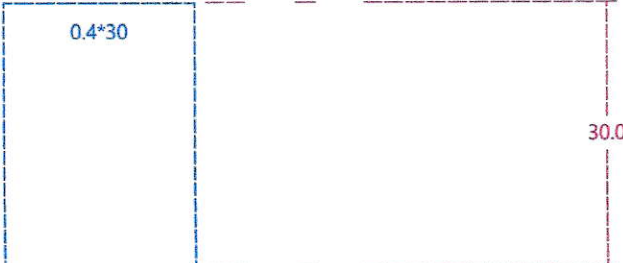제품 도면		우리 하이 피	작성	승인	종합 판정	
			김영란	조승현		
		고 객	작성	승인	종합 판정	


고객명: 신흥SEC

품명 : 0.4X30 초물 LOT NO : 250926-01 DATE : 25.09.26.

No	μm Ni	Ni tolerance
1	2.021	2.014 2.051 2.087
2	2.035	
3	2.087	
4	2.056	
5	2.060	
6	2.044	
Mean	2.051	
S.Dev	0.023	

FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Al}}$
SEC : 15 Sec

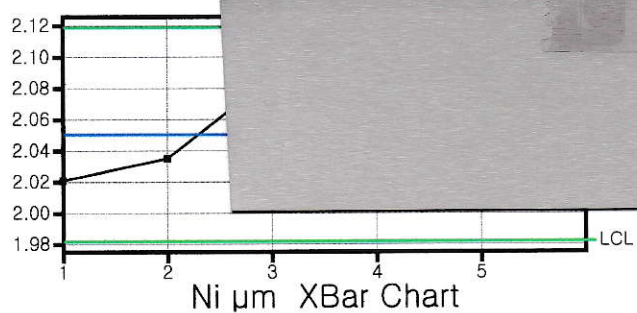

도금원소 : Ni//Al
측정값 개수 6
최대값 2.087
최소값 2.021
범위 0.066
평균값 2.051
표준편차 0.023
변동계수 1.113

우리하이피(주)

