



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*26	20251220 -01 ~ 16	2025-12-20
규격(재질)		LOT SIZE(수량)	
0.4*26 AL	Ni 1.5 μ m ~	782 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금)

12/20
0.4x26
① 48 ⑦ 44 ⑫ 44
② 44 ⑧ 44 ⑬ 44
③ 44 ④ 44 ⑭ 44
④ 44 ⑩ 44 ⑮ 44
⑤ 44 ⑪ 44 ⑯ 44
⑥ 44
총 782kg

II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	26.0	-0.1		Reel/Lot	25.978	0.403
2						25.988	0.403
3						25.990	0.402
4						25.991	0.403
5						25.983	0.403
6						25.992	0.403
7						25.97	0.402
8						25.987	0.403
9						25.984	0.403
10						25.992	0.402

25.986	0.403	

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION		Measurement Data	RESULT
1	X-Ray 측정	Ni 1.5 μ m ~	첨부 : 도금성적서 첨부 : 도금성적서	OK

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(돌돌 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상.하각은후 도금돌돌이나 벗겨짐이 없을것.		OK

제품도면		우리하이피	작성	승인	종합판정	
			김영란	조승현		
고객		작성	승인		종합판정	

업체명 : 신흥SEC


품명 : 0.4x26 초물 LOT NO : 251220-01 DATE : 25.12.20.

No	μm Ni	Ni tolerance		
		2.016	2.038	2.061
1	2.050			
2	2.017			
3	2.035			
4	2.043			
5	2.061			
6	2.024			
Mean	2.038			
S.Dev	0.016			

FUNC: MEASURE
COL : 0.100 mm


Ni
—
Al

SEC : 15 Sec

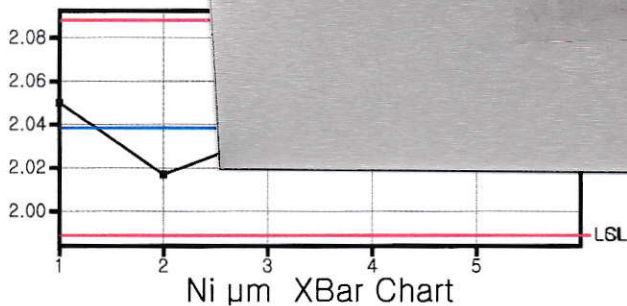

도금원소 : Ni//Al
측정값 개수 6
최대값 2.061
최소값 2.017
범위 0.044
평균값 2.038
표준편차 0.016
변동계수 0.804

우리하이피

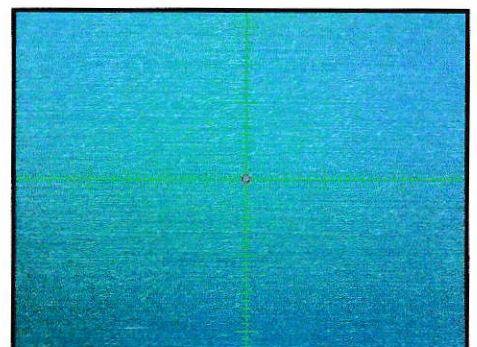

업체명 : 신흥SEC


품명 : 0.4x26 초물 LOT NO : 251220-16 DATE : 25.12.20.

No	μm Ni	Ni tolerance
1	2.085	2.044 2.069 2.094
2	2.044	
3	2.067	
4	2.057	
5	2.090	
6	2.071	
Mean	2.069	
S.Dev	0.017	

FUNC: MEASURE
COL : 0.100 mm


Ni
—
Al

SEC : 15 Sec

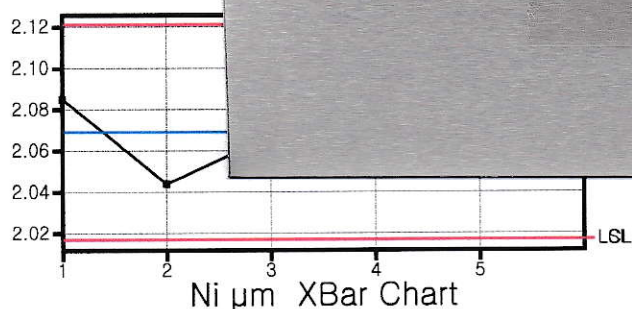

도금원소 : Ni//Al

측정값 개수 6
최대값 2.090
최소값 2.044
범위 0.046
평균값 2.069
표준편차 0.017
변동계수 0.830

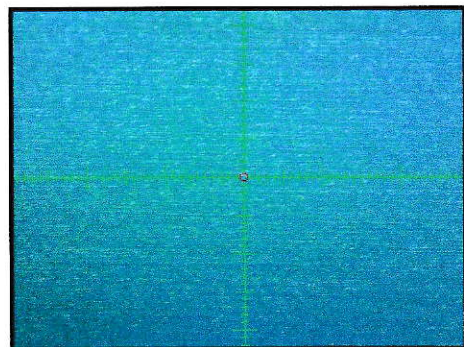

우리하이피