



Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	LOT NO(로트번호)	ISSUED DATE(발행일자)
신흥 SEC	0.4*26	20260324 -01 ✓ 11	2026-03-24
규격(재질)		LOT SIZE(수량)	
0.4*26 AL	Ni 1.5 μ m ~	539 Kg	

I. VISUAL INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION
1	DISCOLORATION(변색)	0/1	OK	6	NO PLATING(미도금)
2	STAIN(얼룩)	0/1	OK	7	PEELING(도금 벗겨짐)
3	RUST(부식)	0/1	OK	8	LUMP(도금물침)
4	CONTAMINATION(오염)	0/1	OK	9	CAMBER(휨)
5	BENT(변형)	0/1	OK	10	PLATING BURR (도금)

3/24

0.4x26

① 4P ⑤ 4P ⑨ 4P
② 4P ⑥ 4P ⑩ 4P
③ 4P ⑦ 4P ⑪ 4P
④ 4P ⑧ 4P

총 539Kg
0

II. DIMENSION INSPECTION (Sampling Plan : n=100mm/Reel, 5Reel/Shipping or n=50ea/5Reel)

NO	항목/구분	SPEC			검사주기	우리하이피	
		규격	하한(-)	상한(+)		1차	2차
1	전폭	26.0	-0.1		Reel/Lot	25.997	0.403
2						25.984	0.403
3						25.999	0.402
4						25.957	0.403
5						25.969	0.402
6						25.987	0.404
7						25.974	0.403
8						25.981	0.403
9						25.998	0.403
10						25.991	0.403

III. PLATING THICKNESS(도금두께) (Sampling Plan : 1y)

NO	SPECIFICATION	Measurement Data	RESULT
1	X-Ray 측정	첨부 : 도금성적서	OK
	Ni 1.5 μ m ~	첨부 : 도금성적서	

IV. FUNCTIONAL TEST (Sampling Plan : n=100mm/EA, 2EA/Shipping, c=0)

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
1	ADHESION TEST (밀착성 시험)	1.제품을 스카치 Tape에 완전 밀착후 45도 각도로 순간적으로 떼어낸다.(돌돌 및 벗겨짐) 2.테이프 시험이 안되는 제품은 니퍼로 90도로 상.하각은후 도금돌돌이나 벗겨짐이 없을것.		OK

제품도면



우리하이피	작성	승인	종합판정	
	김영란	조승현		
고객	작성	승인	종합판정	

업체명 : 신흥SEC


품명 : 0.4x26 초물 LOT NO : 260324-01 DATE : 26.03.24.

No	μm Ni	Ni tolerance
1	2.072	2.018 2.053 2.087
2	2.037	
3	2.025	
4	2.041	
5	2.087	
6	2.053	
Mean	2.053	
S.Dev	0.023	

FUNC: MEASURE
COL : 0.100 mm


Ni
—
Al

SEC : 15 Sec

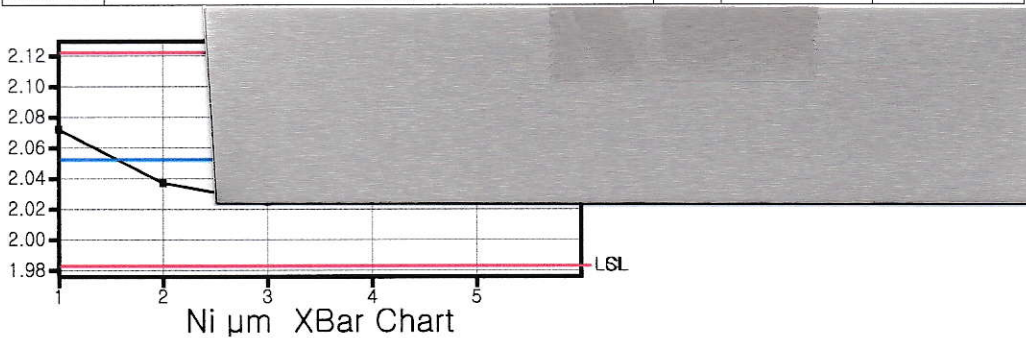

도금원소 : Ni//Al
측정값 개수 6
최대값 2.087
최소값 2.025
범위 0.062
평균값 2.053
표준편차 0.023
변동계수 1.132

우리하이피

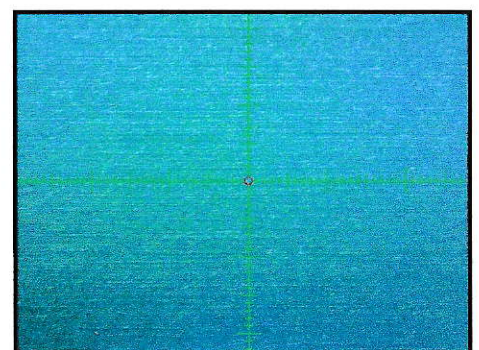

업체명 : 신흥SEC


품명 : 0.4x26 초물 LOT NO : 260324-11 DATE : 26.03.24.

No	μm Ni	Ni tolerance		
		2.021	2.056	2.091
1	2.068			
2	2.049			
3	2.026			
4	2.091			
5	2.071			
6	2.030			
Mean	2.056			
S.Dev	0.025			

FUNC: MEASURE
COL : 0.100 mm

$\frac{\text{Ni}}{\text{Al}}$

SEC : 15 Sec

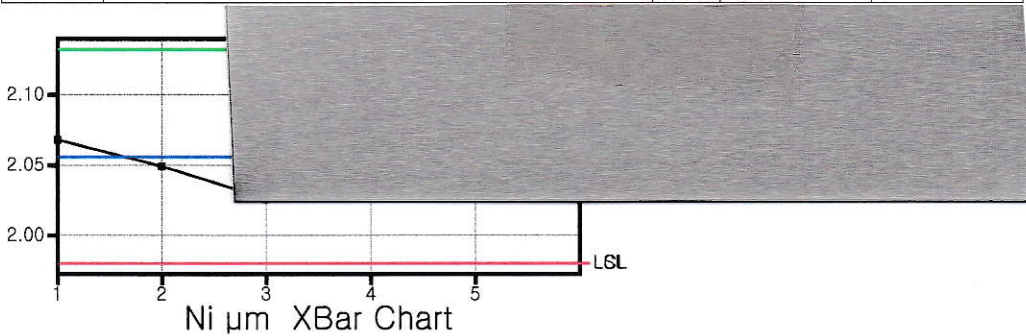

도금원소 : Ni//Al

측정값 개수 6

최대값 2.091


최소값 2.026

범위 0.065

평균값 2.056

표준편차 0.025

변동계수 1.234

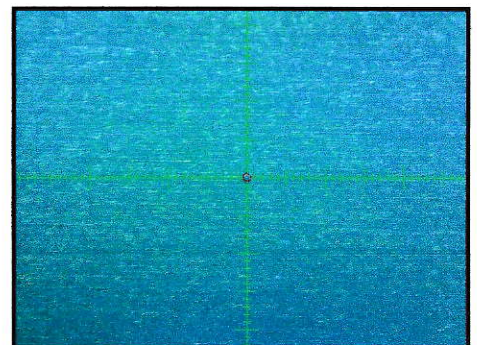

우리하이피